


Design and Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

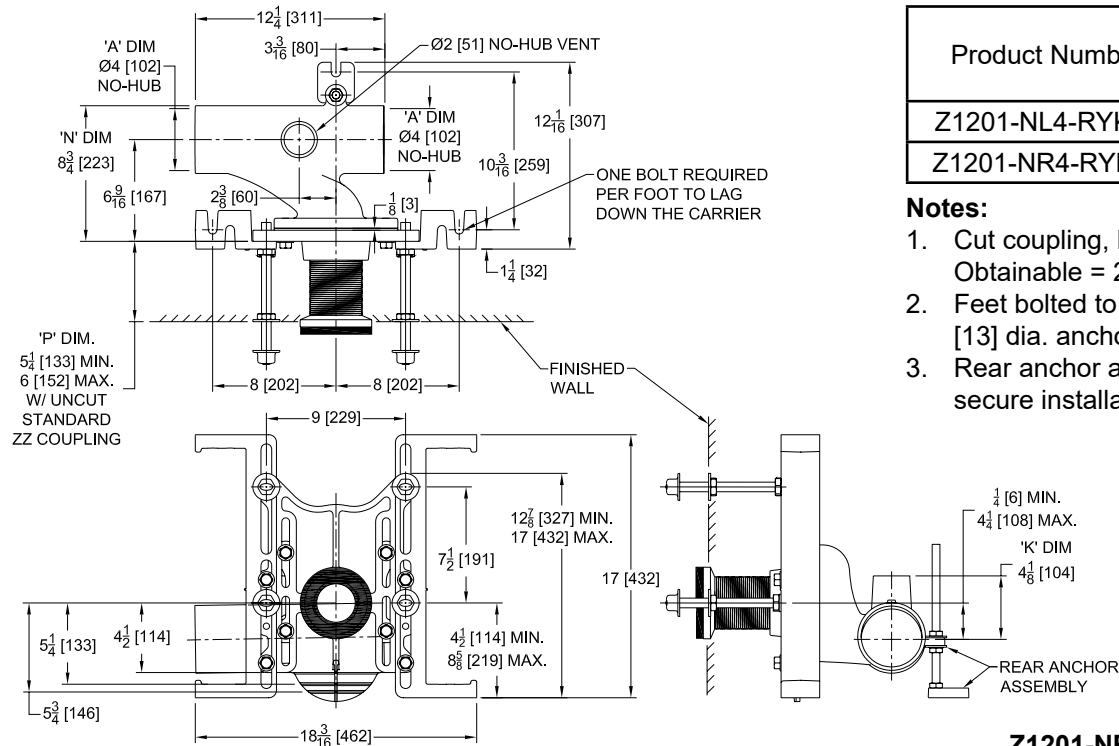

Product Number	Approx. Wt. lbs [kg]
Z1201-NL4-RYK17	59 [27]
Z1201-NR4-RYK17	

Notes:

1. Cut coupling, Min. 'P' Dim.
Obtainable = 2 [51]
2. Feet bolted to floor using min. 1/2 [13] dia. anchors.
3. Rear anchor assembly required for secure installation.

Z1201-NR4-RYK17 Illustrated

ENGINEERING SPECIFICATION: ZURN Z1201-N_4-RYK17

EZCarry® horizontal siphon jet water closet carrier system, with high performance waterway and 4" [102 mm] no-hub connections. System includes Dura-Coated cast iron main fitting with hydro-mechanically optimized sweep and extended 2" [51 mm] vent, adjustable faceplate, QuickFit™ faceplate gasket, floor mounted 17" [432 mm] one piece RYK foot supports, heavy-duty ½" [13 mm] rear anchor tie down, fixture bolts, trim, and stud protectors, bonded "Neo-Seal" gasket, and corrosion resistant, adjustable 3" [76 mm] dia. X 6" [152 mm] coupling with integral test cap designed to increase flow velocity and line carry. EZCarry® system complies with all requirements of ASME A112.6.1M up to a 500 lbs [227 kg] maximum static load rating.

OPTIONS (Check/specify appropriate options)

- | | |
|-----------------------|---|
| _____ Z1201-NL4-RYK17 | 4 [102] No-Hub Left Hand Inlet with Flow to Right |
| _____ Z1201-NR4-RYK17 | 4 [102] No-Hub Right Hand Inlet with Flow to Left |

PREFIXES

- ____ Z D.C.C.I. System with Zurn ZZ Adjustable Coupling*
 ____ ZQ D.C.C.I. System with NPT Faceplate, Non-Adjustable Coupling

SUFFIXES

- | | | | |
|-----------|--|-----------|--|
| _____ -A | Auxiliary Support Assembly
(For 'P' Dim. Greater than 18 [457]) | _____ -F | Floor Mounted, Back Outlet Fixture Support |
| _____ -CC | Corrosion Resistant Cast Iron Coupling
(2-1/4 [57] to 12 [305]) | _____ -G | Galvanized Cast Iron |
| _____ -CE | EZ-Set™ Coupling (Available 6 [152] ,12 [305] longer when
specified, Minimum length = 5 [127]) | _____ -JC | [2 [51] Auxiliary Inlet with 1/8 Bend |
| _____ -CL | Custom Length Standard Coupling with Integral Test Cap
(Specify Length 4, 8, 10, 12 [102, 203, 254, 305]) | _____ -M | Auxiliary Foot Support
(For 'P' Dim. 10 thru 18 [254 thru 457]) |
| _____ -CS | 2-1/4 [57] Polymer Coupling with Integral Test Cap | _____ -VP | Vandal-Proof Trim |
| | | _____ -45 | Finishing Frame for Siphon Jet System |
| | | _____ -50 | Flush Valve Supply Support for Water Closets |

* Regularly furnished unless otherwise specified.

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

⚠️ ADVERTENCIA: Cáncer y daño reproductivo - www.P65Warnings.ca.gov

⚠️ AVERTISSEMENT: Cancer et effets néfastes sur la reproduction - www.P65Warnings.ca.gov