




Z158-E-SC

10 [254] SQUARE TOP PROM-DECK DRAIN W/ STATIC EXTENSION, SECONDARY CLAMP COLLAR, HEEL PROOF GRATE, AND ROTATABLE FRAME

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

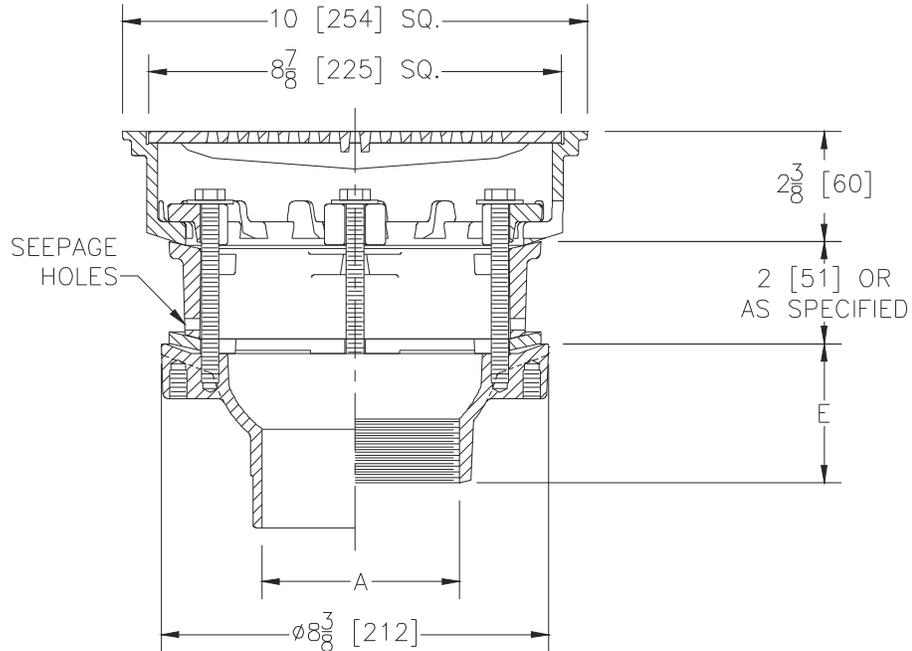

A Pipe Size In [mm]	Approx. Wt. Lbs. [kg]	Grate Open Area Sq. In. [cm ²]
2,3,4 [51,76,102]	27 [12]	21 [136]

ENGINEERING SPECIFICATION: ZURN Z158-E-SC
 10" [254mm] Square top prom-deck drain, Dura-Coated cast iron body with rotatable square promenade frame with seepage openings, frame clamps, 2" [51mm] high static extension with seepage holes, light-duty heel-proof grate, and secondary clamping collar.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

- 3,4 [76,102]
- 2 [51]
- 3 [76]
- 4 [102]
- 2,3,4 [51,76,102]
- 2,3,4 [51,76,102]

(Specify size/type) **OUTLET**

- ___ IC Inside Caulk
- ___ IP Threaded
- ___ IP Threaded
- ___ IP Threaded
- ___ NH No-Hub
- ___ NL Neo-Loc

'E' BODY HT. DIM.

- 3-7/8 [98]
- 2-7/16 [62]
- 2-3/4 [70]
- 3 [76]
- 3-31/32 [101]
- 3-13/16 [97]

PREFIXES

- ___ Z D.C.C.I. Body with Top*
- ___ ZB D.C.C.I. Body with Polished Bronze Top (Add 3/16 [5] to 2-3/8 [60]Dim & 5/8 [16] to 10 [254] Dim)
- ___ ZN D.C.C.I. Body with Polished Nickel Bronze Top (Add 3/16[5] to 2-3/8 [60]Dim & 5/8 [16] to 10 [254] Dim)

SUFFIXES

- ___ -AR Acid Resistant Epoxy Coated
- ___ -C Underdeck Clamp
- ___ -DG Duresist Grate (Z Only)
- ___ -DP Top-Set® Roof Deck Plate
- ___ -DT Decorative Polished Top (ZB and ZN Only)
- ___ -EB Top-Set® Adjustable Extension Assembly
- ___ -G Galvanized Cast Iron
- ___ -TC Neo-Loc Test Cap Gasket (2,3,4 [51,76,102] NL Bottom Outlet only)
- ___ -TS Top Secured with Slotted Screws
- ___ -VP Vandal-Proof Secured Top
- ___ -Y Sediment Bucket
- ___ -90 90° Threaded Side Outlet Body (2,3,4 [51,76,102])

* Regularly furnished unless otherwise specified.