




Z158-EB

10 [254] SQUARE TOP PROM-DECK DRAIN W/
HEEL-PROOF GRATE, ROTATABLE FRAME AND
TOP-SET® ADJUSTABLE EXTENSION ASSEMBLY

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

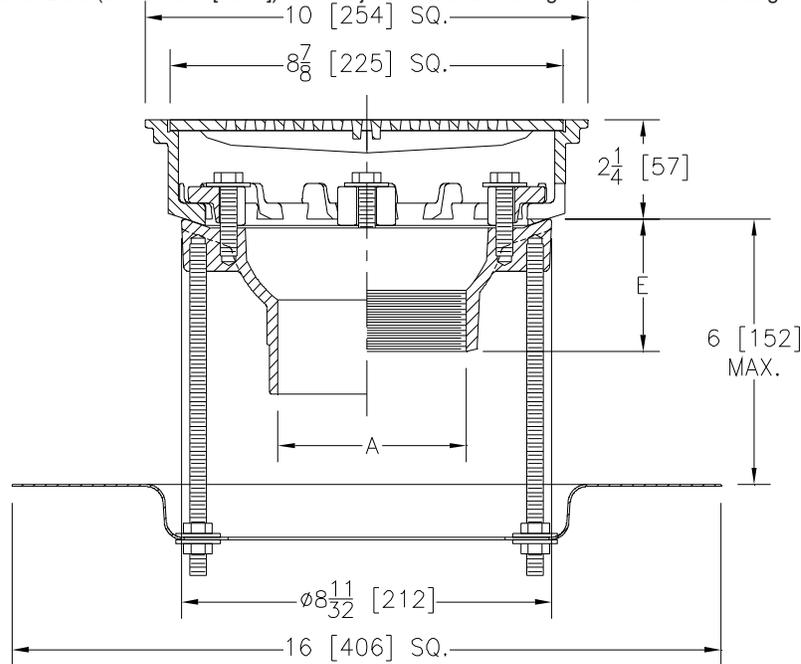

| A Pipe Size In [mm] | Approx. Wt. Lbs. [kg] | Grate Open Area Sq. In. [cm ²] |
|---------------------------|-----------------------------|---|
| 2,3,4 [51,76,102] | 22 [12] | 21 [136] |

ENGINEERING SPECIFICATION: ZURN Z158-EB
10" [254mm] Square top Prom-Deck drain, Dura-Coated cast iron body with rotatable square promenade frame with seepage openings, frame clamps, light duty heel-proof grate, and Top-Set® adjustable extension assembly.

OPTIONS (Check/specify appropriate options)

| PIPE SIZE | (Specify size/type) OUTLET | 'E' BODY HT. DIM. |
|-------------------|----------------------------|-------------------|
| 3,4 [76,102] | ___ IC Inside Caulk | 3-7/8 [98] |
| 4 [102] | ___ IP Threaded | 3 [76] |
| 3 [76] | ___ IP Threaded | 2-3/4 [70] |
| 2 [51] | ___ IP Threaded | 2-7/16 [62] |
| 2,3,4 [51,76,102] | ___ NH No-Hub | 4 [102] |
| 2,3,4 [51,76,102] | ___ NL Neo-Loc | 3-13/16 [97] |

PREFIXES

- ___ Z D.C.C.I. Body with Top*
- ___ ZB D.C.C.I. Body with Polished Bronze Top (Add 3/16 [5] to 2-1/4 [57] Dim. & 5/8 [16] to 10 [254] Dim.)
- ___ ZN D.C.C.I. Body with Polished Nickel Bronze Top (Add 3/16 [5] to 2-1/4 [57] Dim. & 5/8 [16] to 10 [254] Dim.)

SUFFIXES

- ___ -AR Acid Resistant Epoxy Coated
- ___ -DG Duresist Grate (Z Only)
- ___ -DT Decoravtive Polished Top (ZB and ZN Only)
- ___ -E 2 [51] High Static Extension
- ___ -G Galvanized Cast Iron
- ___ -SC Secondary Clamp Collar
- ___ -TC Neo-Loc Test Cap Gasket (2,3,4 [51,76,102] NL Bottom Outlet only)
- ___ -TS Top Secured with Slotted Screws
- ___ -VP Vandal-Proof Secured Top
- ___ -Y Sediment Bucket
- ___ -85 Stainless Steel Perforated Extension

* Regularly furnished unless otherwise specified.