



# Z415-B-SQ-Y


BODY ASSEMBLY W/ "TYPE B" STRAINER AND EZ1™ TECHNOLOGY WITH Q-DECK STABILIZER ASSEMBLY AND SEDIMENT BUCKET

SPECIFICATION SHEET

TAG \_\_\_\_\_

**PATENT  
PENDING**

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

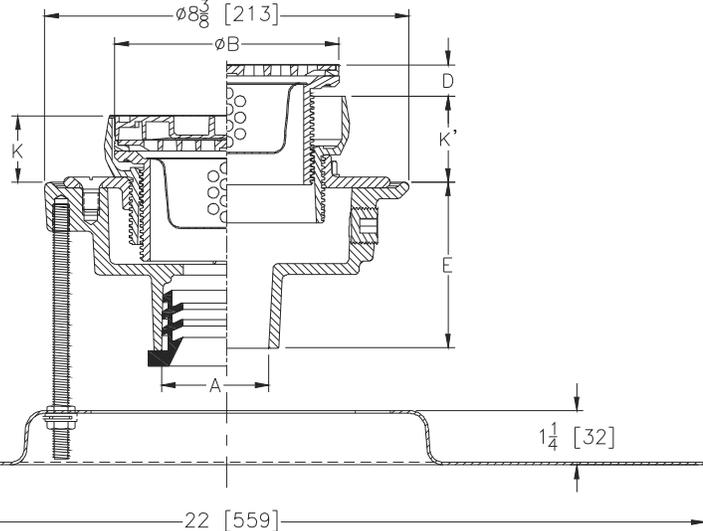

Note:  
Minimum K Dimension is Only Possible with -LR Option when using 6" [152] or 8" [203] Strainer

Dimensions In Inches [mm]								Approx. Wt. Lbs. [kg]	Strainer Open Area Sq. In [cm <sup>2</sup> ]
A Pipe Size	B Strainer Diameter	D		K		K'			
		Min.	Max.	Min.	Max.	Min.	Max.		
2,3 [51,76]	5 [127]	0	1-1/4 [32]	1-1/2 [38]	2-23/32 [69]	2-1/32 [51]	3-7/32 [82]	16 [7]	6-1/4 [40]
2,3,4 [51,76,102]	6 [152]	0	1-1/4 [32]	1-1/2 [38]	2-9/16 [65]	1-31/32 [50]	3-5/32 [80]	19 [9]	9 [58]
3,4 [76,102]	8 [203]	0	1-7/32 [31]	1-7/8 [48]	2-29/32 [74]	2-13/32 [61]	3-1/2 [89]	24 [11]	20 [129]
6 [152]	8 [203]	0	1-7/32 [31]	1-7/8 [48]	2-29/32 [74]	2-13/32 [61]	3-1/2 [89]	26 [12]	20 [129]

## ENGINEERING SPECIFICATION: ZURNZ415-B-SQ-Y

Floor and shower drain, Dura-coated cast iron body with bottom outlet, combination invertible membrane clamp and adjustable collar with seepage slots and top assembly. EZ1™ drainage series is engineered to simplify product installation, comprised of concrete shield, up to 1-1/4" [32mm] of vertical post pour adjustment, pre-packaged shims for tilt correction and integrated, self-contained "Type B" light duty strainer with rough-in cover for protection during concrete pour. Complete with Q-Deck stabilizer assembly and sediment bucket.

## OPTIONS (Check/specify appropriate options)

### PIPE SIZE

2,3,4 [51,76,102]  
2,3,4 [51,76,102]  
2 [51]  
3 [76]  
4 [102]  
6 [152]  
2,3,4 [51,76,102]  
2,3,4 [51,76,102]

### (Specify size/type) OUTLET

\_\_\_ IC Inside Caulk  
\_\_\_ IG Inside Gasket  
\_\_\_ IP Threaded  
\_\_\_ IP Threaded  
\_\_\_ IP Threaded  
\_\_\_ IP Threaded  
\_\_\_ NH No-Hub  
\_\_\_ NL Neo-Loc

### 'E' BODY HT. DIM.

4-13/16 [122]  
4-13/16 [122]  
2-7/16 [62]  
2-3/4 [70]  
2-13/16 [71]  
2-7/8 [73]  
3-13/16 [97]  
3-7/8 [98]

## PREFIXES

\_\_\_ ZB D.C.C.I. Body Assembly w/ Polished Bronze Top  
\_\_\_ ZN D.C.C.I. Body Assembly w/ Polished Nickel Bronze Top\*  
\_\_\_ ZS D.C.C.I. Body Assembly w/ Polished Stainless Steel Top

## SUFFIXES

\_\_\_ -AR Acid Resisting Epoxy Coated Cast Iron  
\_\_\_ -EF 3/4 [19] Extension Frame  
\_\_\_ -G Galvanized Cast Iron  
\_\_\_ -LR Low Rough-In (For 6 [152] and 8 [203] Strainers Only)  
\_\_\_ -P Trap Primer Connection (Specify 1/2\* [13] or 3/4 [19])  
\_\_\_ -TC Neo-Loc Test Cap Gasket (2,3,4 [51,76,102] NL Outlet Only)  
\_\_\_ -TSP Trap Seal Protection Device (Size Matches Drain Outlet Selected) (See Z1072)  
\_\_\_ -U 2 to 3-1/4 [51 to 83] High Extension Adapter  
\_\_\_ -VP Vandal-Proof Secured Top

\* Regularly furnished unless otherwise specified.