




Z509-DX-HP

12 [305] WIDE FLANGE DRAIN WITH DEX-O-TEX
FLANGE AND HEAVY-DUTY HEEL-PROOF GRATE

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

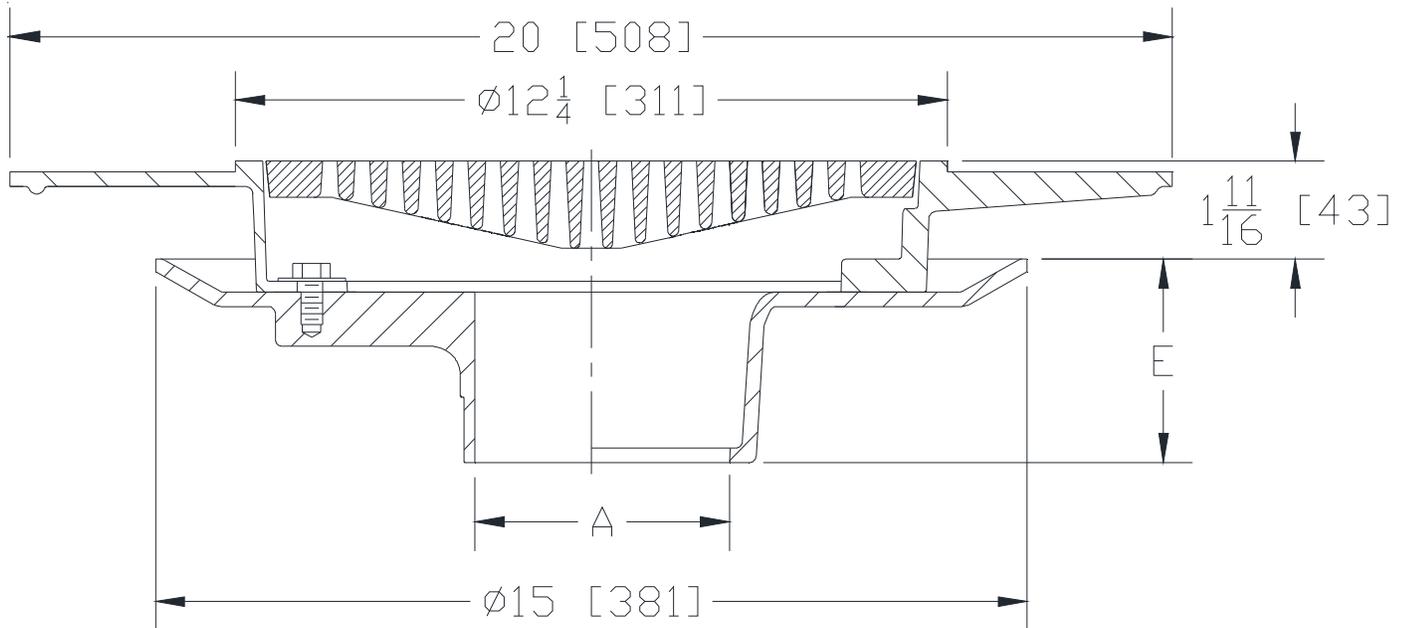

A Pipe Size In. [mm]	Approx. Wt. Lbs. [kg]	Grate Open Area Sq. In. [cm ²]
3,4,6 [76,102,152]	38 [17]	30 [194]

ENGINEERING SPECIFICATION: ZURN Z509-DX-HP

12" [305mm] Diameter wide flange floor drain. Dura-Coated cast iron body with bottom outlet, seepage pan and combination membrane flashing clamp and frame with Dex-O-Tex flange for heavy duty heel-proof grate.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

3, 4, 6 [76, 102, 152]
3, 4, 6 [76, 102, 152]
3, 4, 6 [76, 102, 152]
3, 4 [76, 102]
6 [152]
3, 4 [76, 102]

(Specify size/type) OUTLET

___ IC Inside Caulk
___ IG Inside Gasket
___ IP Threaded
___ NH No-Hub
___ NH No-Hub (IP w/ Z1040)
___ NL Neo-Loc

'E' BODY HT. DIM.

3-1/2 [89]
3-1/2 [89]
3-1/2 [89]
3-1/2 [89]
6 [152]
2-5/8 [67]

PREFIXES

___ Z D.C.C.I. Body and Top*
___ ZB D.C.C.I. Body w/ Polished Bronze Top (Add 3/16 [5] to 1-3/4 [44] Dim. & 3/4 [20] to 12-1/4 [311] Dim.)
___ ZN D.C.C.I. Body w/ Polished Nickel Bronze Top (Add 3/16 [5] to 1-3/4 [44] Dim. & 3/4 [20] to 12-1/4 [311] Dim.)

SUFFIXES

___ -AR Acid Resisting Epoxy Coated Cast Iron
___ -DG Duresist Grate
___ -G Galvanized Cast Iron
___ -P Trap Primer Connection
___ -S Secondary Strainer
___ -TC Neo-Loc Test Cap Gasket
(3, 4 [76, 102] NL Bottom Outlet Only)

___ -TS Top Secured with Slotted Screws
___ -V Backwater Valve (See Z1099)
___ -VP Vandal-Proof Secured Top
___ -Y Sediment Bucket

* Regularly furnished unless otherwise specified.

Zurn Industries, LLC | Specification Drainage Operation
1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929
In Canada | Zurn Industries Limited
3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292
www.zurn.com

Rev. -
Date: 5/9/2018
C.N. No. 140012
Prod. | Dwg. No. Z509-DX-HP