



ZEQ1203-N4-45-50


ADJUSTABLE HORIZONTAL SIPHON JET NO-HUB W/
ELONGATED FITTING, FINISHING FRAME AND FLUSH
VALVE SUPPORT SYSTEM

SPECIFICATION SHEET

TAG _____


Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

Product No.	Approx. Wt. Lbs. [kg]
ZEQ1203-NL4-45-50	84 [38]
ZEQ1203-NR4-45-50	

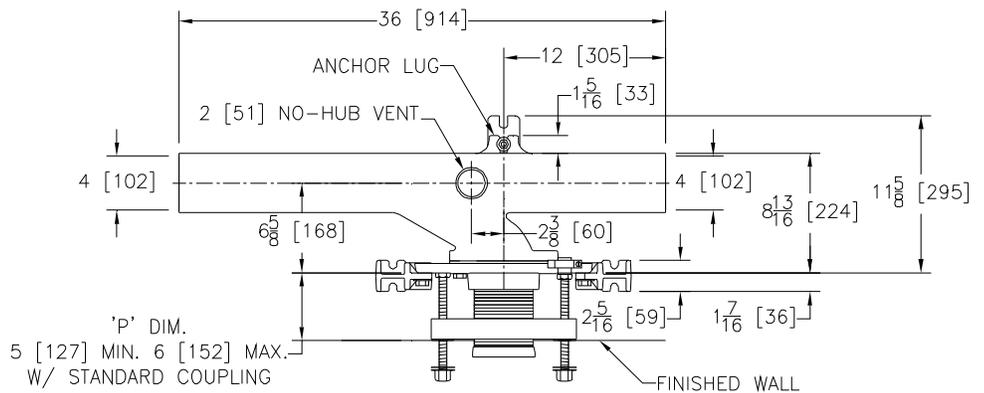

Note:

1. Min. 'P' Dim. Obtainable = 2 [51] with cut standard coupling
2. Feet bolted to floor using min. 1/2 [13] dia. bolts and back slots on carrier feet.
3. Back anchor foot required for secure installation.

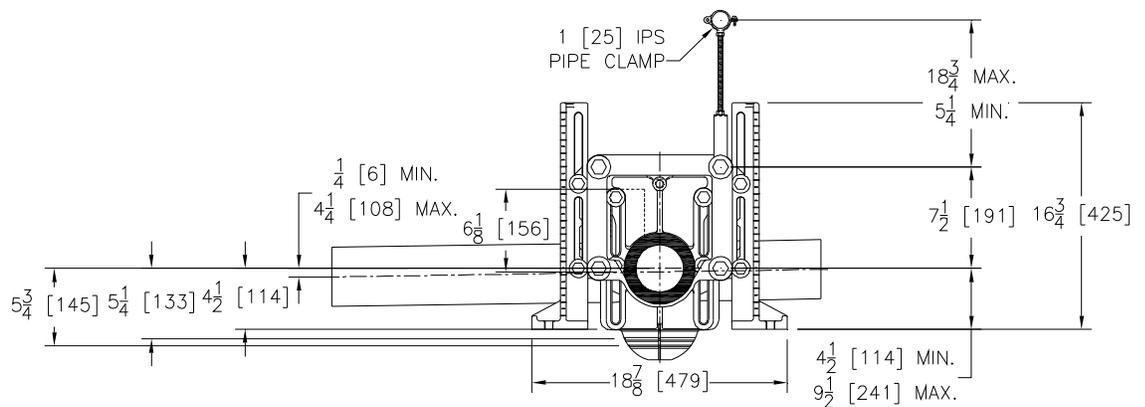

ENGINEERING SPECIFICATION: ZURN ZEQ1203-N4-45-50

Adjustable, horizontal siphon jet water closet "Rigid System" with 4" [102mm] No-Hub connections. Complete with Dura-Coated cast iron right hand or left hand elongated fitting, with 2" [51mm] vent, adjustable gasketed faceplate, universal floor mounted foot supports, corrosion resistant adjustable ABS coupling with integral test cap, finishing frame, flush valve support system, fixture bolts, trim, stud protectors, rear anchor tie down, and bonded "Neo-Seal" gasket.

PRODUCT/DEFINITION

- ____ ZEQ1203-NR4-45-50 4 [102] No-Hub Right Hand Inlet with Flow to Left
- ____ ZEQ1203-NL4-45-50 4 [102] No-Hub Left Hand Inlet with Flow to Right

PREFIXES

- ____ ZEQ D.C.C.I. Elongated Fitting System with NPT Face Plate, Non-Adjustable Coupling*

SUFFIXES

- | | |
|--|---|
| ____ -A Auxiliary Support Assembly
(For 'P'-Dim. Greater than 18 [457]) | ____ -M Auxiliary Foot Support
(For 'P'-Dim. 10 [254] - 18 [457]) |
| ____ -B Blowout Type Fixture Support | ____ -PF Pre-Fab Foot |
| ____ -CC Corrosion Resistant Cast Iron Coupling
(6 [152] to 12 [305]) | ____ -PS Pre-Fab Slotted Foot |
| ____ -CL Coupling Length Other than Standard 6 [152]
(Specify Length Required) | ____ -RYK Unistrut Pre-Fab Foot |
| ____ -JC 2 [51] Auxiliary Inlet with Sanitary Sweep | ____ -VP Vandal-Proof Trim |
| | ____ -X3 3 [76] Foot Extension Assembly
(See Z1200-FT-EXT-3) |
| | ____ -X4 4 [102] Foot Extension Assembly
(See Z1200-FT-EXT-4) |

* Regularly furnished unless otherwise specified.