



# ZF1201-ND3-F\_


ONE-PIECE COMBINATION BACK-TO-BACK FOOT/FACEPLATE  
EZCARRY® HORIZONTAL HIGH PERFORMANCE  
SIPHON JET NO-HUB WATER CLOSET CARRIER SYSTEM

SPECIFICATION SHEET

TAG \_\_\_\_\_

**PATENT  
PENDING**

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

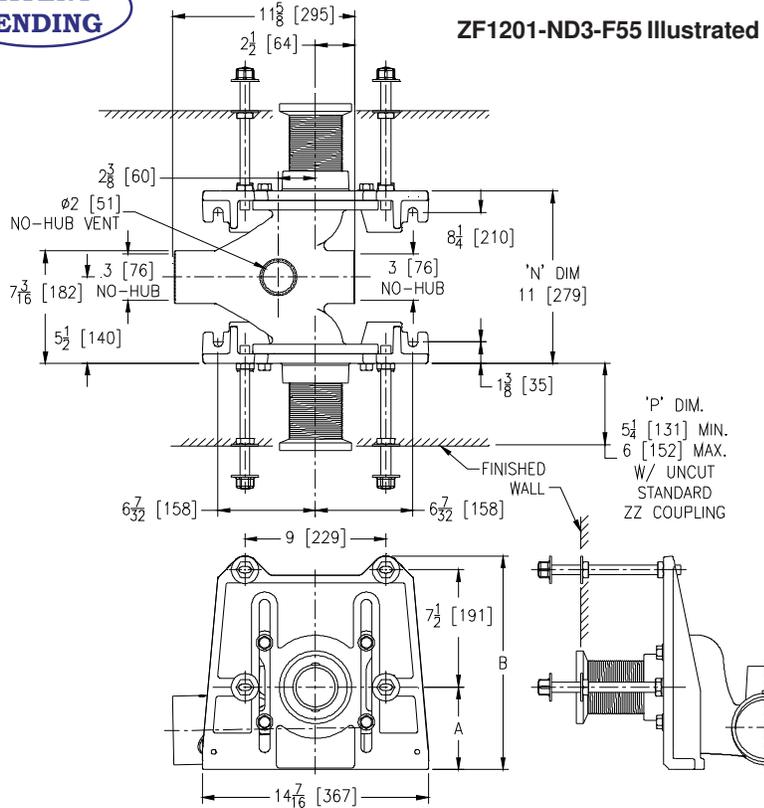

Product Number	Approx. Wt. lbs [kg]	Dimensions in Inches [mm]	
		A	B
ZF1201-ND3-F55	93 [42]	5-1/2 [140]	13-7/8 [352]
ZF1201-ND3-F75	100 [46]	7-1/2 [191]	15-7/8 [403]

- Note:
- Cut ZZ Coupling, Min. 'P' Dim. Obtainable = 2 [51]  
Cut ZQ Coupling, Min. 'P' Dim. Obtainable = 5 [127]
  - Faceplate bolted to floor using min. 1/2 [13] dia. anchors.

**ENGINEERING SPECIFICATION: ZURN ZF1201-ND3-F\_**

EZCarry® One-piece combination floor mounted foot/faceplate horizontal siphon jet water closet carrier system, supplied for ( ) rough-in height, with high performance Dura-Coated cast iron main fitting with hydro-mechanically optimized sweep, 3" [76mm] no-hub connections and extended 2" [51mm] vent. Corrosion resistant, adjustable 3" [76mm] dia. X 6" [152mm] couplings with integral test caps, designed to increase flow velocity and line carry, and labor saving "Neo-Seal" bonded gaskets optimize flow performance while reducing installation steps. Complete system includes one-piece combination foot/faceplates; heavy-duty 1/2" [13mm] rear anchor tie downs; fixture bolts, trim and stud protectors. EZCarry® one-piece combination floor mounted foot/faceplate system complies with all applicable requirements of ASME A112.6.1M up to a 500 lbs [227kg] maximum static load.

**OPTIONS** (Check/specify appropriate options)

- \_\_\_ ZF1201-ND3-F55 3 [76] No-Hub Back-to-Back Inlet (Double) with 5-1/2 [140] Non-Adjustable Rough-In Height
- \_\_\_ ZF1201-ND3-F75 3 [76] No-Hub Back-to-Back Inlet (Double) with 7-1/2 [191] Non-Adjustable Rough-In Height

**PREFIXES**

- \_\_\_ ZF D.C.C.I. System with Zurn ZZ Adjustable Coupling\*
- \_\_\_ ZQF D.C.C.I. System with NPT Faceplate, Non-Adjustable Coupling

**SUFFIXES**

- \_\_\_ -A Auxiliary Support Assembly (For 'P' Dim. Greater than 18 [457])
- \_\_\_ -CC Corrosion Resistant Cast Iron Coupling (2-1/4 to 12 [57 to 305])
- \_\_\_ -CE EZ-Set™ Coupling (Available 6, 12 [152, 305] or longer when specified. Minimum length=5 [127])
- \_\_\_ -CL Custom Length Standard Coupling with Integral Test Cap (Specify Length 4, 8, 10, 12 [102, 203, 254, 305])
- \_\_\_ -CS 2-1/4 [57] Polymer Coupling with Integral Test Cap (ZZ Coupling Only)
- \_\_\_ -F Floor Mounted, Back Outlet Fixture Support
- \_\_\_ -G Galvanized Cast Iron
- \_\_\_ -M Auxiliary Foot Support (for 'P' Dim. 10 thru 18 [254 thru 457])
- \_\_\_ -VP Vandal-Proof Trim
- \_\_\_ -45 Finishing Frame for Siphon Jet System
- \_\_\_ -50 Flush Valve Supply Support for Water Closets

\* Regularly furnished unless otherwise specified.