



ARCHITECTURAL & ENGINEERING SPECIFICATION

Complete EcoVantage® high efficiency 0.125 gpf sensor actuated, battery powered, wall mounted commercial urinal system with Z5755-U Omni-Flo top spud urinal, ZER6003AV-ULF-SM exposed, sensor activated chrome-plated urinal flushometer for either left or right hand supply manufactured by Zurn.

PRODUCT FEATURES

- 0.125 gpf (gallons per flush)
- Wall mounted extended rim top spud urinal
- High efficiency siphon washout flush action
- Integral trap
- Vitreous china wall urinal construction
- Diaphragm- type flushometer complete with Zurn's Go Blue® TPE, chloramine resistant, dual seal diaphragm with a clog resistant, triple filtered bypass
- High pressure vacuum breaker with one piece hex coupling nut
- Adjustable tailpiece
- True mechanical override button
- Control Stop has internal siphon-guard protection, sweat solder kit, wall flange with set screw
- Asymmetric backwall for reduced splash back
- Oversized footprint to make retrofit easy
- Vandal resistant outlet strainer included
- 88% water savings over standard 1.0 gpf system

COMPLIANCE AND CERTIFICATION:

Meets the American Disabilities Guidelines and ANSI A117.1 requirements when installed according to these requirements.

- Fixture - Complies with ASME A112.19.2 / CSA B45.1
- Flush Valve - Complies with ASSE 1037 / ASME A112.1037 / CSA B125.37



This product should be used with a WaterSense labeled counterpart with a compatible flush volume to ensure that the entire system meets the requirements for water efficiency and performance.



ZURN ONE SYSTEM PACKOUT INCLUDES:

FIXTURE - Z5755-U:

0.125 gpf [0.5 lpf] to 1.0 gpf [3.8 lpf] vitreous china, wall hung, integral trap, washdown urinal complete with 3/4" [19mm] top spud connection, concealed universal retrofit wall bracket, 2" [51mm] outlet connection and vandal resistant outlet strainer


FLUSH VALVE - ZER6003AV-ULF-SM:

Exposed, quiet diaphragm-type, chrome-plated flushometer valve with a polished exterior. Complete with Zurn's AquaVantage® TPE, chloramine resistant, dual seal diaphragm with a clog resistant, triple filtered bypass. The valve incorporates a 6VDC motor actuator, a battery powered automatic sensor, chrome-plated metal cover with manual override push button and 10 degree angled sensor


ARCHITECTURAL & ENGINEERING APPROVAL

The information contained in this document is subject to change without notice. Please contact Zurn for most up to date information.


Rough-in/Overview dimensions

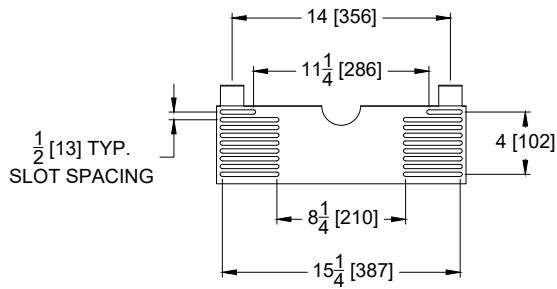

UNIVERSAL RETROFIT
BRACKET (UB)
Model 829800014

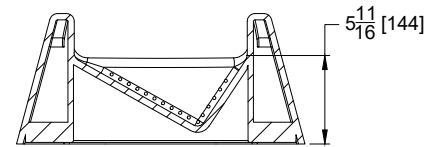

SECTION A-A

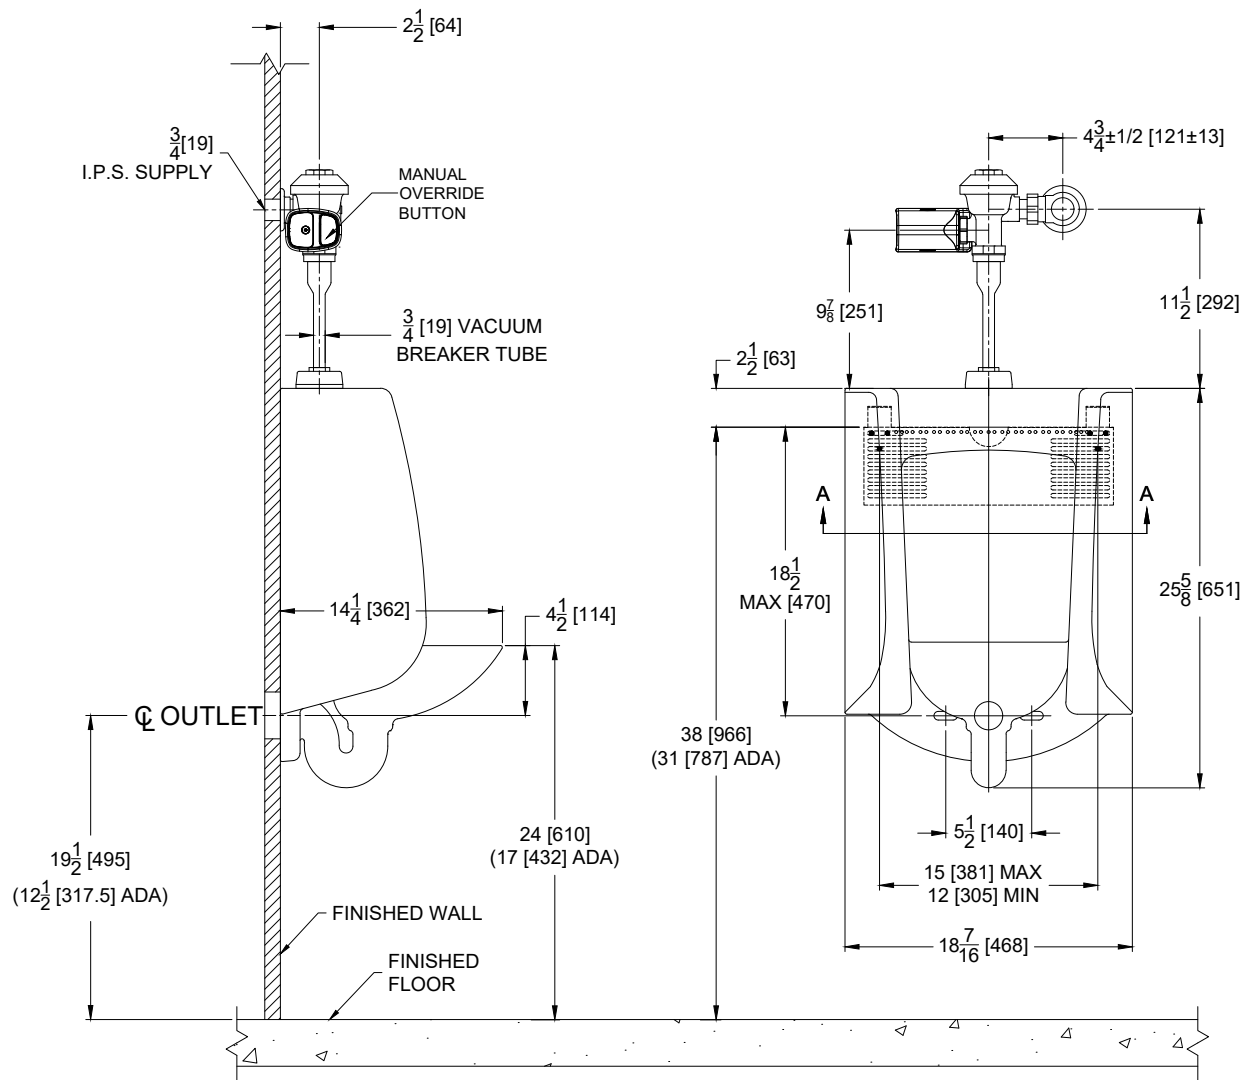




Z1222

PLATE TYPE SYSTEM WITH BEARING PLATE

SPECIFICATION SHEET

TAG _____

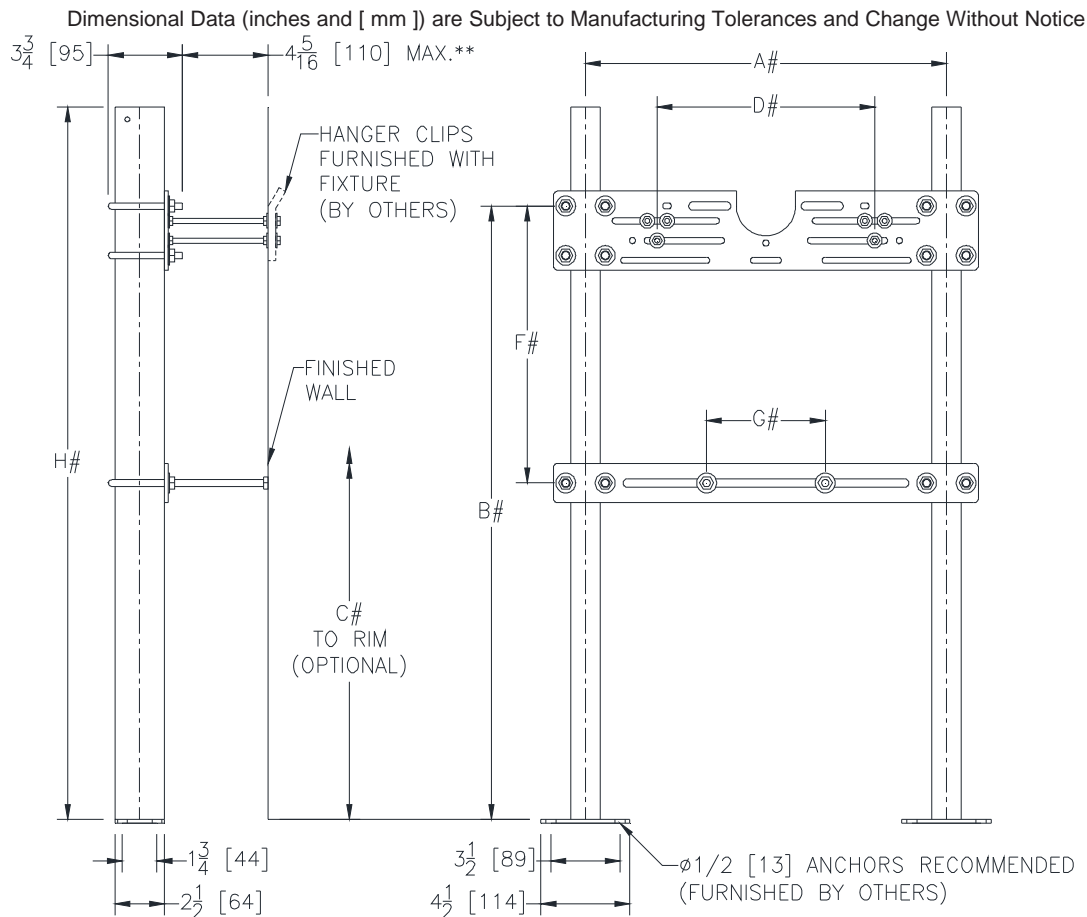

**WITH STANDARD STUD LENGTH OF 6 [152]

REFER TO ROUGH-IN GUIDE OF SPECIFIC FIXTURE FOR DIMENSION

Product No.	Approx. Wt. Lbs. [kg]
Z1222	30 [14]

ENGINEERING SPECIFICATION: ZURN Z1222

Wall urinal support system complete with Dura-Coated carbon structural steel rectangular tubing uprights, conforming to ASTM A500 Grade C, with welded base feet having slotted floor anchor holes. Lower bearing plate is vertically adjustable with slot to accommodate bearing jack placement. Upper universal hanger plate is pre-notched for back spud inlet and is designed for various hardware positions and fixtures. Includes mounting fasteners and hardware. Carrier system exceeds load and deflection requirements as outlined in ASME Standard A112.6.1M.

OPTIONS (Check/specify appropriate options)**PREFIXES**

___ Z Dura-Coated System with Universal Plate*

SUFFIXES

___ -EZ Easy to Install Assembly (Uprights, bearing plate, and hanger plate are factory assembled)
___ -UA Urinal Adapter
___ -58 Flush Valve Supply Support

* Regularly furnished unless otherwise specified.

Zurn Industries, LLC | Specification Drainage Operation
1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929
In Canada | Zurn Industries Limited
3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292
www.zurn.com

Rev. G
Date: 09/27/2017
C.N. No. 137976
Prod. | Dwg. No. Z1222