

**ARCHITECTURAL & ENGINEERING SPECIFICATION**

Complete EcoVantage® high efficiency 0.125 gpf manual actuated, wall mounted commercial urinal system with Z5755-U Omni-Flo top spud urinal, Z6003AV-ULF exposed, manually activated chrome-plated urinal flushometer for either left or right hand supply manufactured by Zurn.

**PRODUCT FEATURES**

- 0.125 gpf (gallons per flush)
- Wall mounted extended rim top spud urinal
- High efficiency siphon washout flush action
- Integral trap
- Vitreous china wall urinal construction
- Diaphragm- type flushometer complete with Zurn's Go Blue® TPE, chloramine resistant, dual seal diaphragm with a clog resistant filtered bypass
- ADA compliant, non-hold open and no-leak handle
- High pressure vacuum breaker
- Adjustable tailpiece
- Control stop with internal siphon guard protection, vandal resistant cap, sweat solder kit and cast wall flange with set screw
- Asymmetric backwall for reduced splash back
- Oversized footprint to make retrofit easy
- Vandal resistant outlet strainer included
- 88% water savings over standard 1.0 gpf system

**COMPLIANCE AND CERTIFICATION:**

Meets the American Disabilities Guidelines and ANSI A117.1 requirements when installed according to these requirements.

- Fixture - Complies with ASME A112.19.2 / CSA B45.1
- Flush Valve - Complies with ASSE 1037 / ASME A112.1037 / CSA B125.37



This product should be used with a WaterSense labeled counterpart with a compatible flush volume to ensure that the entire system meets the requirements for water efficiency and performance.

**ZURN ONE SYSTEM PACKOUT INCLUDES:****FIXTURE - Z5755-U:**

0.125 gpf [0.5 lpf] to 1.0 gpf [3.8 lpf] vitreous china, wall hung, integral trap, washdown urinal complete with 3/4" [19mm] top spud connection, concealed universal retrofit wall bracket, 2" [51mm] outlet connection and vandal resistant outlet strainer


**FLUSH VALVE - Z6003AV-ULF:**

Exposed, quiet diaphragm-type, chrome-plated flushometer valve with a polished exterior. Complete with Zurn's AquaVantage® TPE, chloramine resistant, dual seal diaphragm with a clog resistant, filtered bypass. The valve is ADA compliant with a non-hold open and no leak handle feature. Internal seals are made of chloramine resistant materials


**ARCHITECTURAL & ENGINEERING APPROVAL**

The information contained in this document is subject to change without notice. Please contact Zurn for most up to date information.


## Rough-in/Overview dimensions

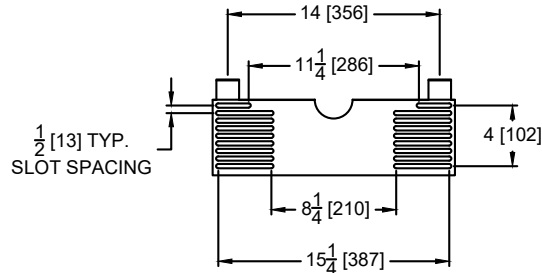

UNIVERSAL RETROFIT  
BRACKET (UB)  
Model 829800014

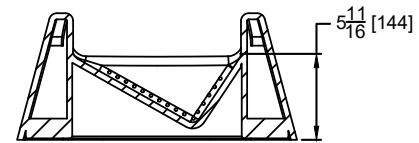

SECTION A-A

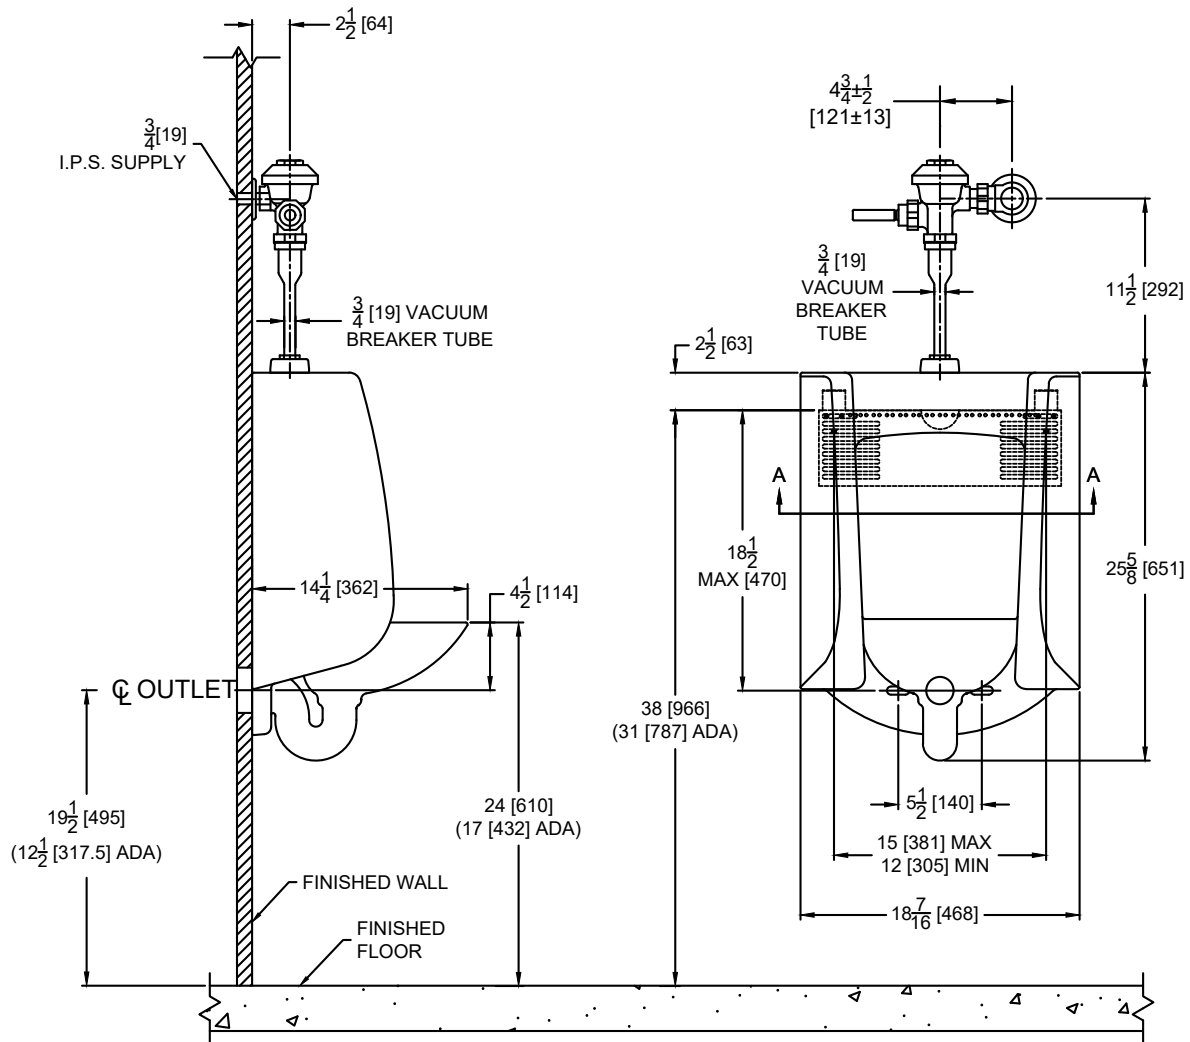




# Z1222

## PLATE TYPE SYSTEM WITH BEARING PLATE

SPECIFICATION SHEET

TAG \_\_\_\_\_

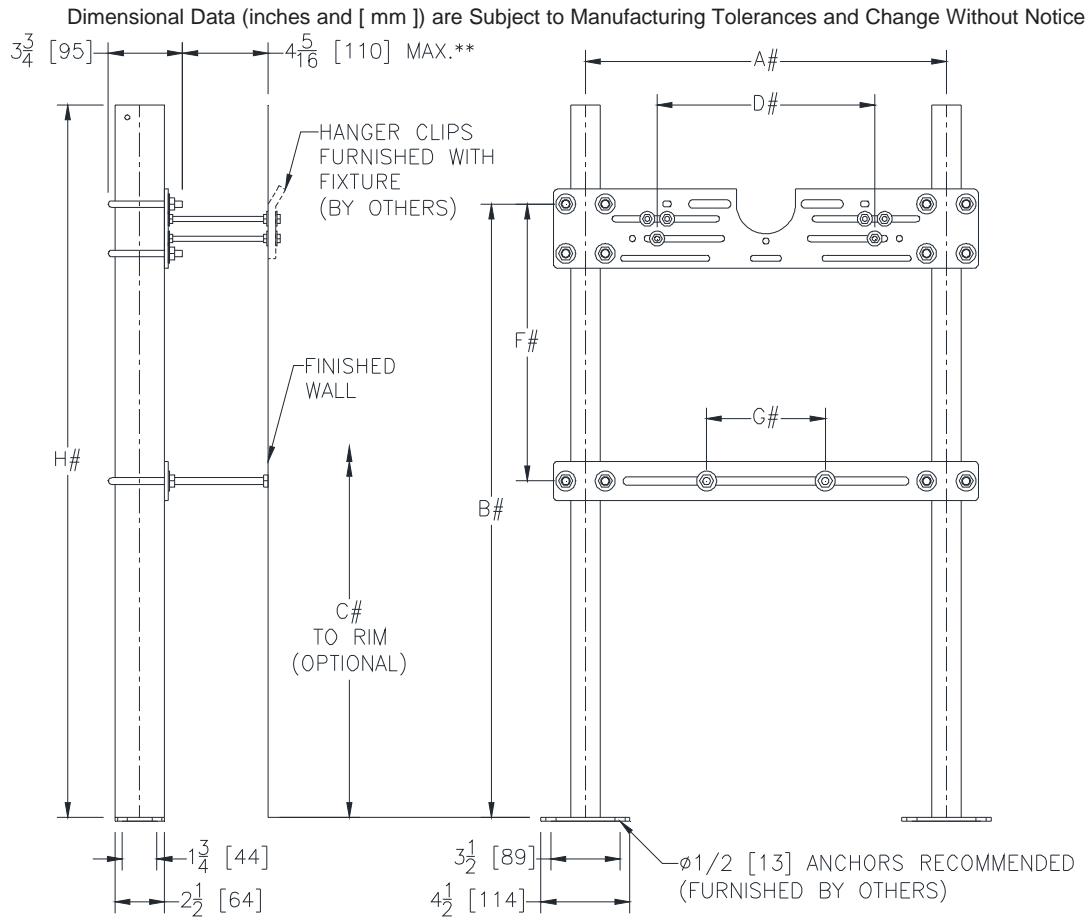

\*\*WITH STANDARD STUD LENGTH OF 6 [152]  
# REFER TO ROUGH-IN GUIDE OF SPECIFIC FIXTURE FOR DIMENSION

Product No.	Approx. Wt. Lbs. [kg]
Z1222	30 [14]

### ENGINEERING SPECIFICATION: ZURN Z1222

Wall urinal support system complete with Dura-Coated carbon structural steel rectangular tubing uprights, conforming to ASTM A500 Grade C, with welded base feet having slotted floor anchor holes. Lower bearing plate is vertically adjustable with slot to accommodate bearing jack placement. Upper universal hanger plate is pre-notched for back spud inlet and is designed for various hardware positions and fixtures. Includes mounting fasteners and hardware. Carrier system exceeds load and deflection requirements as outlined in ASME Standard A112.6.1M.

### OPTIONS (Check/specify appropriate options)

#### PREFIXES

\_\_\_ Z Dura-Coated System with Universal Plate\*

#### SUFFIXES

\_\_\_ -EZ Easy to Install Assembly (Uprights, bearing plate, and hanger plate are factory assembled)  
\_\_\_ -UA Urinal Adapter  
\_\_\_ -58 Flush Valve Supply Support

\* Regularly furnished unless otherwise specified.

Zurn Industries, LLC | Specification Drainage Operation  
1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929  
In Canada | Zurn Industries Limited  
3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292  
[www.zurn.com](http://www.zurn.com)

Rev. G  
Date: 09/27/2017  
C.N. No. 137976  
Prod. | Dwg. No. Z1222