

Z1231EZ Lavatory Carrier

Leave Your Carrier Code Book Behind



Z1231EZ-15-UN-42

Whether you're a prefab contractor or the project engineer, our EZ Lavatory Carrier easily adapts to any application on the jobsite.

The carrier features universal arms, an independent horizontal and vertical bracket system, and only two anchors per upright foot. You'll save steps without sacrificing strength behind the wall or compliance down the line.



Z1231EZ-15-UN-42-WL

Meet All Project Requirements

No more paging through codes for compatibility or upfront staging. The carrier's universal arms allow contractors to adjust height in the field and assemble with virtually any sink application.

Set Up Horizontally or Vertically

This is the only carrier on the market with an independent bracket system you can position horizontally or vertically. The intuitive, flexible connection system works with the site's configuration—not the other way around.

Save Steps with Less Foot Anchors

Cut your install time and costs in half. Instead of four foot anchors, this carrier secures in place with two. The anchors support up to 250 lbs, while limiting floor penetrations and eliminating the need for relegging.

Take the labor out of your next lavatory installation. Specify your next project at inspec.zurn.com.

Z1231EZ Lavatory Carrier

Engineering Specification

Z1231EZ Universal Carrier System is designed to reduce installation time and ensure jobsite flexibility. The carrier system comes standard with Dura-Coated, ductile iron universal arms, including leveling screws and preinstalled soft-set elastomeric locking devices. Reversible header plates with slots and integral welded arm sleeves provide 2" [51 mm] of horizontal adjustment per plate, which allows for horizontal post anchoring adjustment between 13"-21" [330 mm - 533 mm]. Uprights, rigid spacing plates, and header plates are factory assembled. The system's Dura-Coated uprights constructed of carbon-steel tubing meet ASTM A500 Grade C standards. Uprights also include welded steel plate mounting feet that feature separate bolt patterns for use with either (2) 3/8" [10 mm] or 1/2" [13 mm] anchors per leg. Carrier feature lower and upper rigid plates for a spacing of 17" [432 mm]. Upper spacing plate includes horizontal slots for securing water supply and vent piping. The carrier system exceeds load and deflection requirements in accordance to ASME Standard A112.6.1M at all rough-in positions and meets OSHPD spacing requirements for two anchor per upright installation.


Prefixes

-Z Dura-Coated System with Support Plate

Suffixes

- AL Adapter Lug
- D Back to Back System
- EXT Extension Sleeve
3"-5" [76 mm - 127 mm]
- WL Waste Line Sleeve

APPROXIMATE WEIGHT LB [KG]
43 [19]

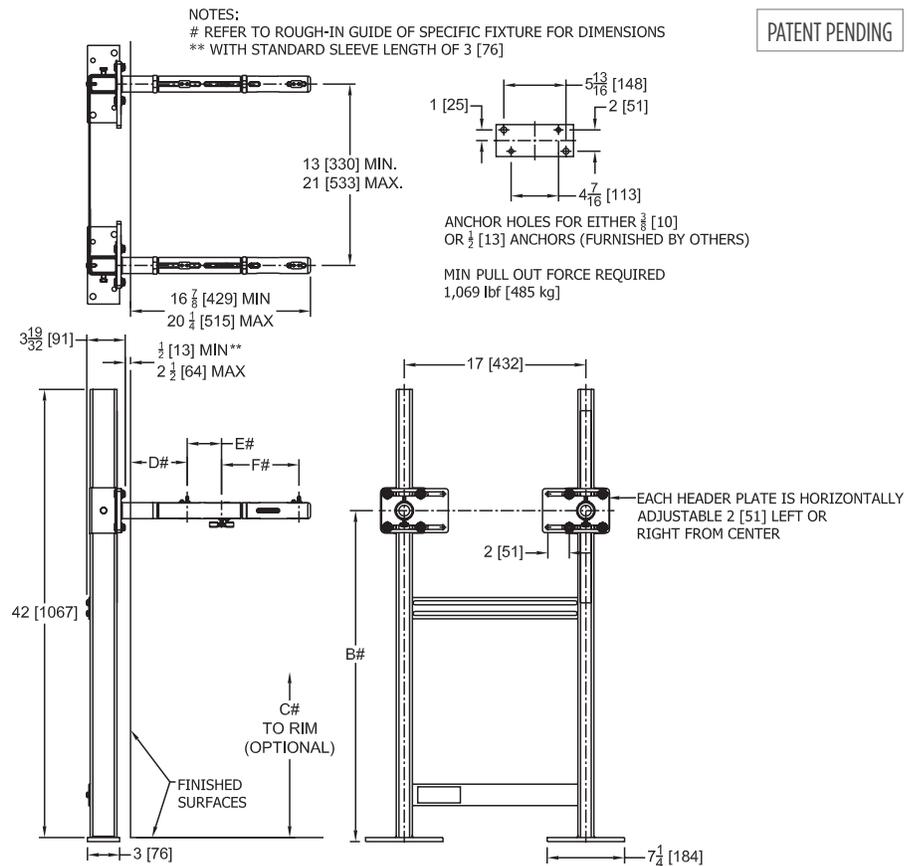

Design and dimensional data (inches and [mm])
are subject to manufacturing tolerances and change without notice