




# One-piece Faceplate Carrier System

Optimized Design  
for Flexible Prefabrication

Make prefabrication more seamless with the Zurn ZF1201-U One-piece Faceplate EZCarry® Water Closet Carrier System. The ZF1201-U offers smooth, hassle-free installation in prefabrication construction with a cutting-edge design that includes universal connection points and no required adjustment points.

Its best-in-class line carry with safe securing methods helps reduce the risk involved in transporting carrier assemblies to jobsites and supports the safety and well-being of involved parties. The ZF1201-U leverages versatile design components to streamline the installation process while maximizing savings in labor, cost and time.

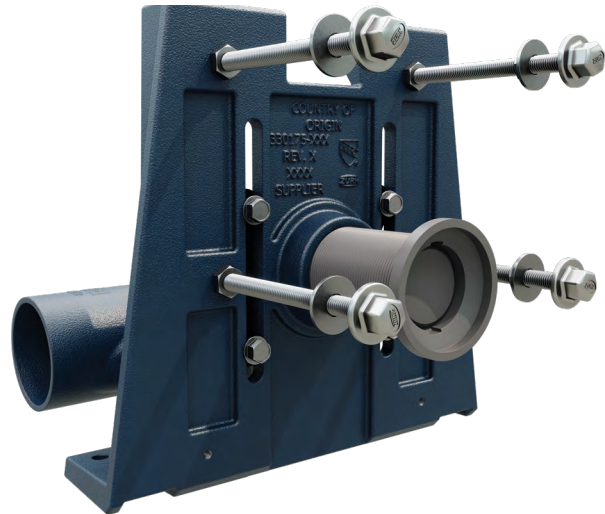

**20-25%**  
less assembly time  
with the ZF1201 series

## Features and Benefits

- One-piece faceplate set to rough-in heights with no complicated vertical adjustments required
- Provides top and bottom connection points for common prefabrication methods
- Multiple secure mounting options and machine threaded holes to prevent separation from the carrier during transportation
- No rear anchor attachment is required to meet load requirements in most installations
- 500 lb. max static load per ASME 112.6.1M

# One-piece Faceplate Carrier System

## Flexible Installation

Choose the method that best fits your needs.



## Installation Features

- Parabolic gussets provide ample room for customer tooling
- Connection point spacing allows for universal adjustment of strut channel
- Machine threaded hole design enhances contractor safety and protects the product during transportation

## 30+ Hours of Time Saved

Gray Mechanical in Houston, TX, reported saving 30+ hours in prefabrication and installation of four banks consisting of 12 carriers on a strut installation project. This translated to one-half to two-thirds of the time vs. installing adjustable carriers.

In addition, there were no issues with transporting the carriers to the jobsite as a bottom strut was used for transportation. The struts were very ridged to prevent any movement during transport.

“

*Easy installation in 5-10 minutes as an entire bank (assembly). There were no issues with the finished floor height and maintaining ADA requirements.*

**JOHNATHAN MAY** PRE-FABRICATION MANAGER

”

Find more information at [zurn.com](https://www.zurn.com)

