




Preassemble Drain Body To Deck Plate

Fasten Assembly To Deck

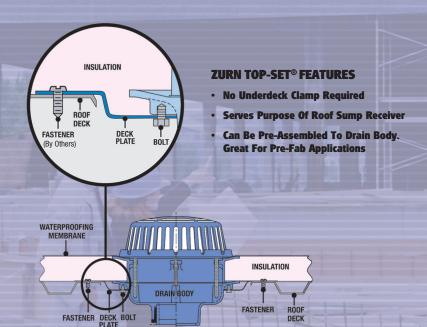

* This product is one in our new Contractor Series Line that highlights end user benefits increasing the awareness of contractor friendly Zurn products.

Patent Pending Deck Plate Design

Seal Waterproof Membrane Under Clamping Collar. Simply Position Dome Onto Flashing Clamp.

It's Fast – Contractor can install roof drain in half the time as conventional methods ... a superior method of installation using a bolt down system that secures roof drain assembly integrally to roof deck.

It's Secure – Unique design combines traditional roof sump receiver with deck clamp to provide a more secure, long lasting installation of the roof drain. Available for all main roof drain sizes - Z100 (15"), Z121(12"), Z125 (8")

It's Safe – Contractor can install roof drain from top of roof eliminating costly and dangerous assembly of components from the underside of the the roof deck, leaving the pipe connection as the only remaining task from under the roof deck.



ZURN INDUSTRIES, LLC Specification Drainage Operation 1801 Pittsburgh Avenue, Erie, PA 16502, 855-663-9876

In Canada: ZURN INDUSTRIES LIMITED

7900 Goreway Drive, Unit 10, Brampton, Ontario L6T 5W6, 905-405-8272

Form No. ZMKTG210-05, 6/18


Zurn Top-Set Deck Plate

The Zurn TOP-SET® Roof Drain Deck Plate (catalog option -DP) features ease of installation, allowing the installer to move onto more projects sooner. The TOP-SET® Deck Plate allows for the entire roof drain assembly to be installed from the topside of the roof. Separate underdeck clamps and roof-sump receivers are no longer necessary ... the deck plate acts as both. Only the pipe connection is completed from the underside of the roof.

Zurn manufactures three different size (-DP) deck plates for a trouble-free fit for all [8", 12" and 15"] diameter Zurn drains. The deck plate also includes strategically placed slots allowing versatile securing arrangements to various roof decks. The deck plate is constructed of 16-gage steel with a corrosive resistant finish.

Installation Instructions

- Step 1 Create opening in roof (Q-deck) to receive drain assembly.
- Step 2 Fasten drain body to deck plate by aligning the (4) bosses on the body and (4) slots on the plate using the hex-head cap screws provided.
- Step 3 Drop body-plate assembly into the pre-cut opening in the roof.
- Step 4 Align deck plate attachment slots with the desired position in the roof and fasten the assembly to the roof with self-tapping screws (supplied by others).
- Step 5 Cover the roof, including the body plate assembly with waterproofing membrane and insulation if applicable.
- Step 6 Fasten flashing clamp to the body assembly and attached the dome.

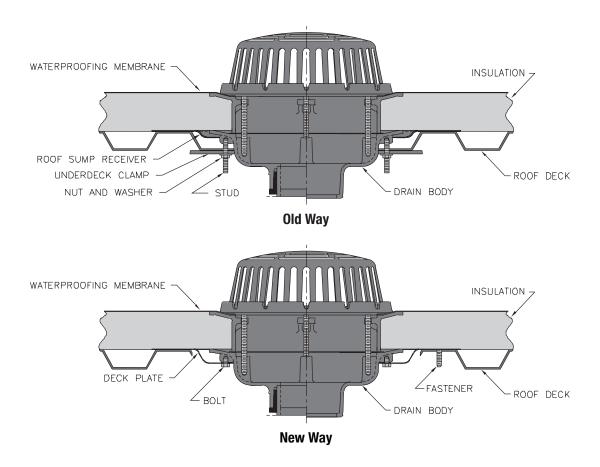

- ♠ WARNING: Cancer and Reproductive Harm www.P65Warnings.ca.gov
 ♠ ADVERTENCIA: Cáncer y daño reproductivo www.P65Warnings.ca.gov
 ♠ AVERTISSEMENT: Cancer et effets néfastes sur la reproduction -
- www.P65Warnings.ca.gov

