



Z6930-XL

AquaSense® Battery Powered Sensor Faucet

Smooth, crisp design is modern and suitable for any commercial application

Performance

- Concealed sensor lens prevents damage due to cleaning solvents and vandalism while enhancing design appeal
- Electronic efficiency for improved battery life
- Hydro-generator option available
- Low-flow control options from 1.5 to 0.35 gpm

Versatility

- New smooth, sleek aesthetic design
- Constructed of an all cast brass spout to ensure durability
- Line purge feature promotes sanitation while removing bacteria buildup
- Customized time-out options (10 sec/30 sec/60 sec)
- Electronic components align with spout base for ease of installation
- Ideal for new construction and retrofit applications



Z6930-XL-GEN



1.855.ONE.ZURN
www.zurn.com

ZURN® Z6930-XL – AquaSense® Battery-Powered Faucet

ENGINEERING SPECIFICATIONS

ADA compliant, battery-powered, chrome-plated sensor faucet for retrofit and new construction.

- Flow rate
- Occupant detection
- Thirty second time-out feature
- Spout module
- In-line filter
- Inlet for a 1/2" [13mm] ball riser
- 4 "AA" batteries
- Infrared convergence-type proximity sensor
- 1.5 gpm vandal-resistant aerator
- Chrome-plated cast brass
- UPC/cUPC
- ADA Compliant
- ASME 112.18.1/112.18.2
- CSA B125.1/B125.2
- California Low Lead AB-1953
- Vermont Low Lead S.152

FLOW CONTROL OPTIONS

- F 0.5 gpm/1.9 Lpm vandal-resistant non-aerated
- J 1.5 gpm/ 5.7 Lpm vandal-resistant laminar flow
- K 1.0 gpm/ 3.8 Lpm vandal-resistant laminar flow
- L 1.0 gpm/ 3.8 Lpm vandal-resistant aerator
- M 0.35 gpm/1.3 Lpm vandal-resistant non-aerated

POWER SUPPLY CHOICES (SOLD SEPARATELY)

- ACA 6 VDC plug-in power converter
- HW6 Hardwired power converter

OPTIONAL POWER SUPPLY ACCESSORIES

- CWB Connector wire for hardwire install
- MJ Mini junction box


NOTE: For hardwire applications furnish P6000-HW6 power converter. Order P6000-HW6 power converter separately. The P6000-HW6 and P6000-MJ will power up to 8 sensor faucets.

ACCESSORIES


- 10S 10 second time-out
- 60S 60 second time-out
- ADM Above-deck mixer*
- ADM-1 Above-deck mixer with 4" cover plate*
- ADM-2 Above-deck mixer with 8" cover plate*
- CP4 Cover plate 4" [102] centers
- CP8 Cover plate 8" [203] centers
- DSA Drug screening applications (hardwired applications)
- GEN Hydro-generator retrofit kit (1.0 and 1.5 gpm only)
- H4 Wrist blade handle for ADM*
- LP Line purge 2 minute/24 hour
- MT Mixing tee*
- MV Temperature mixing valve
- SH Supply hoses for mixing valve
- TMV Thermostatic mixing valve for multiple faucets
- TMV-1 Thermostatic mixing valve for single faucets
- XT No timeout
- _____ Other
- XL Zurn lead compliant products (-XL) are manufactured to comply with state laws and local codes that mandate lead content levels less than one quarter of one percent (0.25%) total lead content by weighted average.

*Option not available for -XL faucets


TYPICAL Z6930-XL

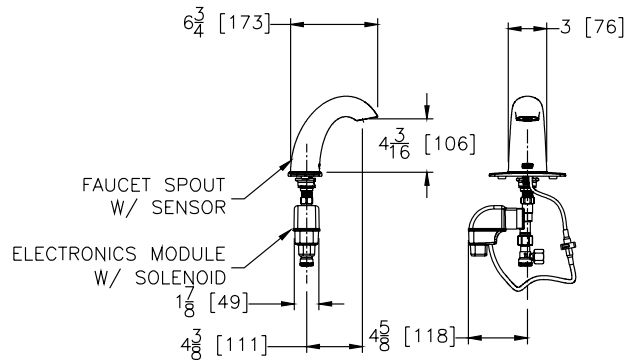


TYPICAL Z6930-XL-ACA

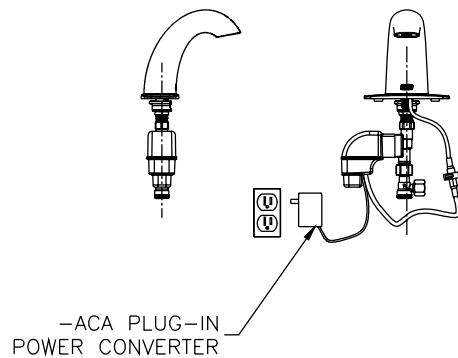

TYPICAL Z6930-XL-CWB

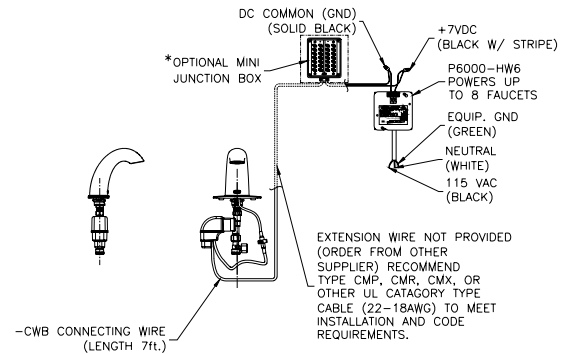

* Optional: -MJ mini junction box for connecting up to 8 faucets

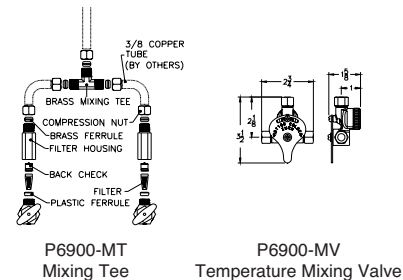

Note: Must use either Zurn P6000-HW6 hardwire power converter or Zurn P6000-ACA plug-in power converter to ensure proper operation. Using a power converter other than Zurn may result in operation malfunction or unit failure.