


Zurn Wilkins 300AR Series

Backflow Preventer Order Form

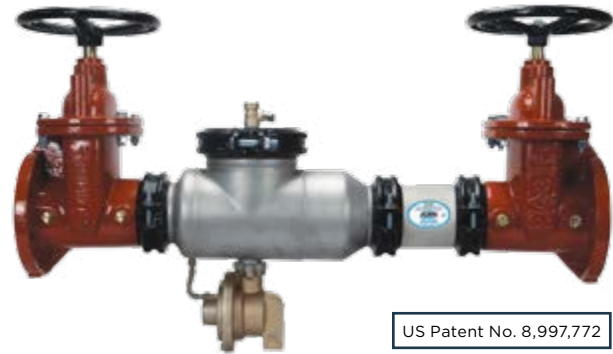

375ASTR

Available in stainless steel or ductile iron bodies

Save time and money during backflow replacement with custom-length assembly.

Features and Benefits

- 300AR drop-in assembly drastically reduces installation time and building's water down time, making it the ideal solution for retrofit and replacement installations
- Superior performance of the 300 series provides the lowest life-cycle cost through ease of maintenance, repair, and readily available low cost repair kits
- Shut-offs remain in the same location as previous installation, enabling tamper switches to be re-installed on OS&Y shutoffs without modifying electrical wiring
- Shipped fully assembled with custom length AR spool, eliminating field cutting and spool assembly
- Measure and submit the current flange face-to-face dimension and your 300AR will be built to match the current footprint*
- 48 hour shipment from any of Zurn's 5 regional service centers speeds delivery and maximizes up-time
- Fully assembled 300AR Series is approved by the Foundation for Cross Connection Control and Hydraulic Research at USC



*Assemblies manufactured within +0/-1/4" tolerance of stated length



XL LEAD FREE

Zurn Wilkins 300AR Series Backflow Preventer Order Form

Contractor Firm	Contractor Contact
Contractor Address	Contractor Cell #
Contractor City	Contractor Email
Contractor State	Rep Agency
Contractor Zip Code	Rep Contact
Project Location	Distributor
Deliver by Date	Distributor Contact

FOR ZURN WILKINS CUSTOMER CARE ONLY

Sales Order #	PO #	Part #
---------------	------	--------

ORDER INFORMATION

	Ductile Iron Body Standard Valve (Lead Free)	Ductile Iron Body Detector Assembly (Lead Free)	Stainless Steel Body Standard Valve (Lead Free)	Stainless Steel Detector Assembly (Lead Free)
Double Check	350AR	350ADAR	350ASTR	350ASTDAR
Reduced Principle	375AR	375ADAR	375ASTR	375ASTDAR

Size	2-1/2"	3"	4"	6"	8"	10"
------	--------	----	----	----	----	-----

Inlet Gate Valve	NRS	OS&Y	Butterfly	PI	Other Details (include if .DOM. needed)
Outlet Gate Valve	NRS	OS&Y	Butterfly	PI	
Inlet End Connection	Flanged		Grooved		
Outlet End Connection	Flanged		Grooved		

VALVE TYPE BEING REPLACED (SUBMIT A SEPARATE FORM FOR EACH REPLACEMENT BACKFLOW)

Manufacturer	Model
Face to Face Dimension (exact field measurement, $\pm 1/16"$) of the existing backflow preventer, including shut-offs (see image to the right)**	
Face to Face Dimension	


Assemblies manufactured within $+0" / -1/4"$ tolerance of stated length.
Use 1/8" full-face rubber gaskets to make up tolerance gap. Measure twice, cut once.

CUSTOMER SIGNATURE TO GUARANTEE FIELD MEASUREMENT

300AR Series valve orders are non-cancellable and non-returnable. Signing this form guarantees the face to face dimensions to be accurate.

Signature

Date

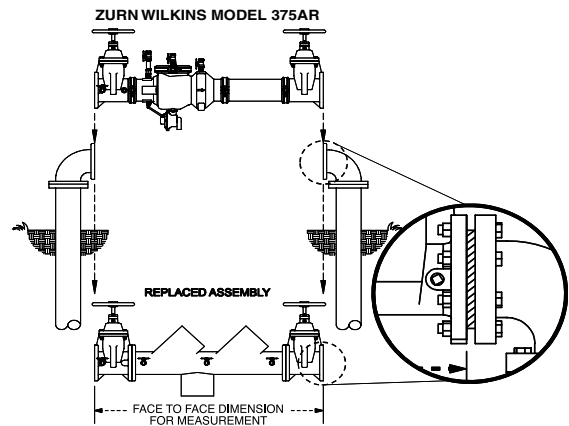

VALVE SIZE	MINIMUM FACE TO FACE DIMENSION (OVERALL LAY LENGTH)				MAXIMUM LENGTHS		
	DUCTILE IRON BODY		STAINLESS STEEL BODY*		LENGTH RANGE "A"	LENGTH RANGE "B"	LENGTH RANGE "C"
	GATE VALVES	BUTTERFLY VALVES	GATE VALVES	BUTTERFLY VALVES			
2-1/2"	37-1/8"	34-1/8"	34"	31"	47-1/8"		
3"	38-1/8"	34-5/8"	35"	31-1/2"	48-1/8"		
4"	40-1/2"	35-3/4"	37-3/8"	32-5/8"	50"	62-1/4"	
6"	49-1/2"	42-1/2"	46"	39"	59"	71-1/4"	
8"	64-7/8"	57-7/8"	55-3/4"	48-3/4"	74"	86"	
10"	67-3/8"	61-7/8"	58-5/8"	61-3/8"	77"	89"	100-5/8"

Custom lengths longer than shown are available.

*Stainless steel backflow body is slightly shorter than ductile iron body.

**If ordered as a single part number including ancillary equipment such as wye strainers, the face to face length will be inclusive of that ancillary equipment, however the components may ship separately.

Email or fax this Order Form with the Purchase Order to: Zurn Wilkins Customer Care, email: wilkinscs@zurn.com, fax: 805-237-7197.

