




Z1385 TYPICAL INSTALLATION POST HYDRANT

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

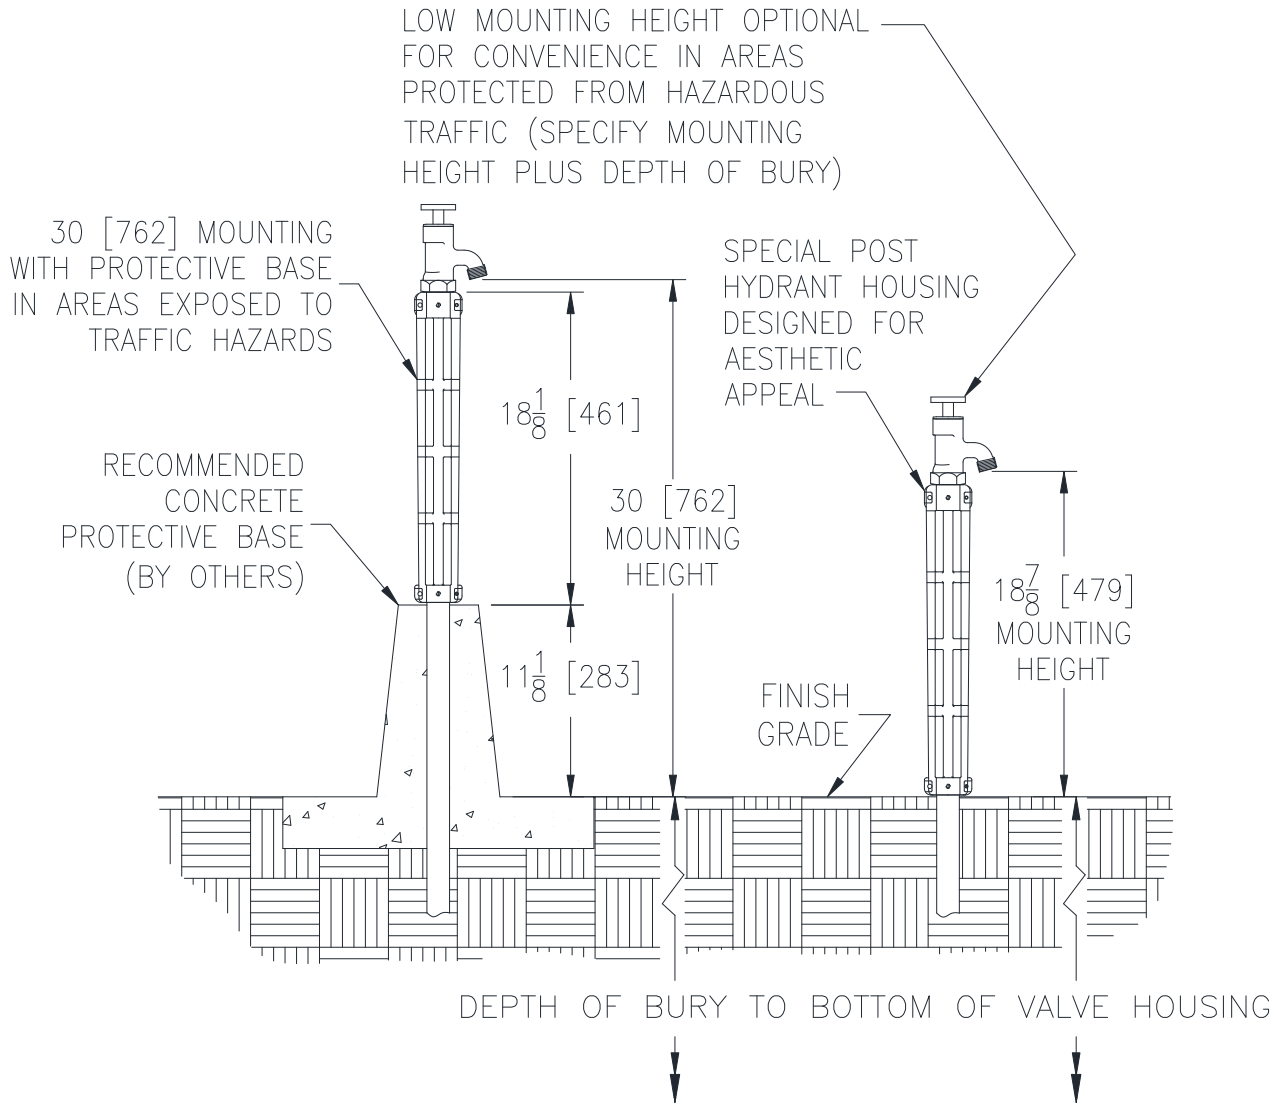

Z1385 POST HYDRANT - NON-FREEZE, EXPOSED

Post hydrant features a unique housing designed for aesthetic appeal. Siphon resistant drain port prevents subsurface water contamination from entering hydrant. Upward movement of the washer guide when the hydrant is turned on positions O-Rings to seal off drain port. When hydrant is turned off, the washer guide moves down, clearing the drain port to permit complete drainage of water from the hydrant. Drain port is tapped 1/4" [6mm] IP for drain piping connection by others.

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

⚠ ADVERTENCIA: Cáncer y daño reproductivo - www.P65Warnings.ca.gov

⚠ AVERTISSEMENT: Cancer et effets néfastes sur la reproduction - www.P65Warnings.ca.gov

Zurn Industries, LLC | Specification Drainage Operation
1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929
In Canada | Zurn Industries Limited
3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292
www.zurn.com

Rev. A
Date: 4/17/2018
C.N. No. 139910
Form No. H9