


# Model 1250AA

Water Hammer Arrester

## Installation Instructions

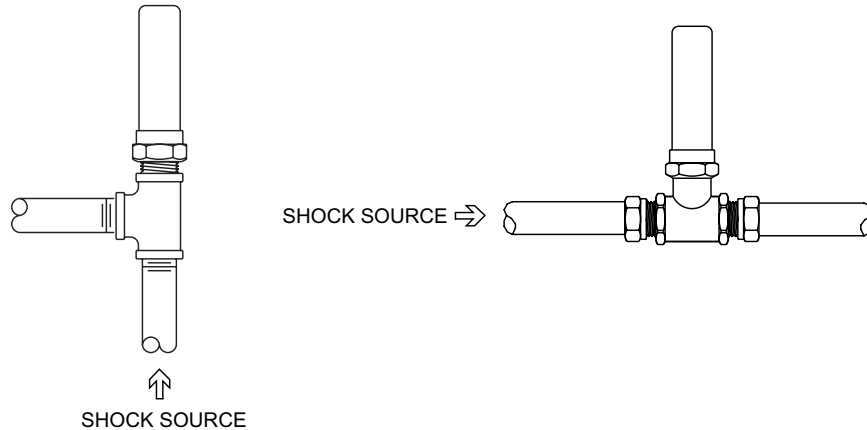

1. Locate Water Hammer Arrester as close to the source of shock as possible. (i.e. dishwasher, toilet, faucet or icemaker).
2. With supply pressure off and pipes sufficiently drained, install Water Hammer Arrester at appropriate locations on both hot and cold water lines.
3. After Water Hammer Arrester is installed (do not wrench body) repressurize system and check for leaks.

Note: For installation on water lines with pressures up to 150 psi and temperature ranges of 33°F to 140°F. Systems which exceed 60 psi shall be installed with a pressure reducing valve upstream of the unit.

**WARRANTY:** ZURN WILKINS Valves are guaranteed against defects of material or workmanship when used for the services recommended. If in any recommended service, a defect develops due to material or workmanship, and the device is returned, freight prepaid, to ZURN WILKINS within 12 months from date of purchase, it will be repaired or replaced free of charge. ZURN WILKINS' liability shall be limited to our agreement to repair or replace the valve only.

⚠ **WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)  
⚠ **ADVERTENCIA:** Cáncer y daño reproductivo - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)  
⚠ **AVERTISSEMENT:** Cancer et néfastes sur la reproduction - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

WARNING: This product is NOT Lead Free in accordance with U.S. Federal Law and is illegal in the U.S. for use in potable services or to install in water systems anticipated for human consumption.

**ZURN**

**WILKINS** 1747 Commerce Way, Paso Robles, CA 93446 Phone:855-663-9876 Fax:805-238-5766

IS1250AA (REV. C 6/17)


**ZURN WILKINS**

[www.zurn.com](http://www.zurn.com)

# Model 1250AA

Water Hammer Arrester

## Installation Instructions

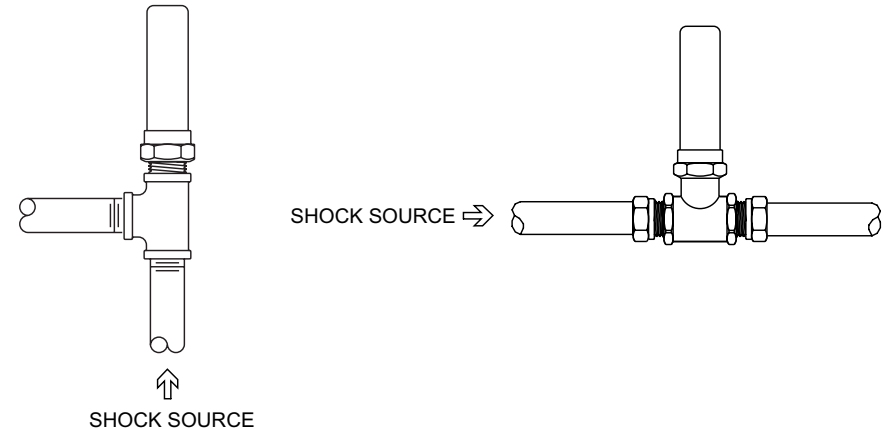

1. Locate Water Hammer Arrester as close to the source of shock as possible. (i.e. dishwasher, toilet, faucet or icemaker).
2. With supply pressure off and pipes sufficiently drained, install Water Hammer Arrester at appropriate locations on both hot and cold water lines.
3. After Water Hammer Arrester is installed (do not wrench body) repressurize system and check for leaks.

Note: For installation on water lines with pressures up to 150 psi and temperature ranges of 33°F to 140°F. Systems which exceed 60 psi shall be installed with a pressure reducing valve upstream of the unit.

**WARRANTY:** ZURN WILKINS Valves are guaranteed against defects of material or workmanship when used for the services recommended. If in any recommended service, a defect develops due to material or workmanship, and the device is returned, freight prepaid, to ZURN WILKINS within 12 months from date of purchase, it will be repaired or replaced free of charge. ZURN WILKINS' liability shall be limited to our agreement to repair or replace the valve only.

⚠ **WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)  
⚠ **ADVERTENCIA:** Cáncer y daño reproductivo - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)  
⚠ **AVERTISSEMENT:** Cancer et néfastes sur la reproduction - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

WARNING: This product is NOT Lead Free in accordance with U.S. Federal Law and is illegal in the U.S. for use in potable services or to install in water systems anticipated for human consumption.

**ZURN**

**WILKINS** 1747 Commerce Way, Paso Robles, CA 93446 Phone:855-663-9876 Fax:805-238-5766

IS1250AA (REV. C 6/17)

**ZURN WILKINS**

[www.zurn.com](http://www.zurn.com)