

# MODEL ZW209E - Pressure Reducing Valve with Solenoid Shut-off Valve Control Valve Order Form



Customer: \_\_\_\_\_ Date: \_\_\_\_\_

Contact: \_\_\_\_\_ Email: \_\_\_\_\_

Telephone/Fax: \_\_\_\_\_ Ref. P. O. \_\_\_\_\_

## Required Valve Information

Quantity: \_\_\_\_\_

All returns are subject to a restocking/refurbishing fee.  
Contact Customer Care for details on return policies.

Size: (Check one)  1-1/4"  1-1/2"  2"  2-1/2"  3"  4"  6"  8"  10"  12"  14"  16"

## Function Options:

- Check one  "C" Option\* - Check Valve with Isolation Valve  
 "L" Option\* - Closing Speed Control  
 "O" Option\* - Opening Speed Control (Standard on 4" or smaller)

Valve body is ductile iron, epoxy coated

## Body Options:

- Check all that apply  Standard - Full Port Globe Body  
 "A" Option - Angle Style Body (1-1/4" - 10")  
 "R" Option - Reduced Port Body (3" - 10" Flanged only)

## End Connections:

- Check one  Standard - ANSI Class 150 Flanges Standard (1-1/2" - 16")  
 "G" Option - IPS Grooved (1-1/2" - 10")  
 "TH" Option - NPT Threaded (1-1/4" - 3")  
 "Y" Option\* - ANSI Class 300 Flanges (1-1/2" - 16")

## Main Valve Options:

- Standard - Stainless Steel Seat, Seal Ring Retainer, and Stem Guide  
 Optional  "Z" Option\* - Visual Position Indicator

## Pilot Options:

- Standard - Isolation Valves, Inlet and Outlet Pressure Gauges, and "Wye" Type Strainer


- Check one  Standard - PRXL Pilot (15 - 150 psi)  
 "LP" Option\* - PV-PRD Pilot (5 - 25 psi)  
 "HP" Option\* - PV-PRD Pilot (30 - 300 psi)

- Check all that apply  Standard - Copper Tubing and Brass Fittings  
 "ST" Option\* - Stainless Steel Tubing ("included with SP option, only replaces Copper Tubing")  
 "SP" Option\* - All Stainless Steel Pilotry (replaces all Brass Fittings, Pilot Valve & Copper Tubing. "GL" Option included)  
 "SH" Option\* - Stainless Steel Braided Hoses (only replaces Copper Tubing)

- Check one  "NC" Option - Normally Closed (energize to open) Main Valve, 120vac/60 Hz Solenoid  
 "NO" Option - Normally Open (energize to close) Main Valve, 120vac/60 Hz Solenoid  
 "24NC" Option - Normally Closed (energize to open) Main Valve, 24vac/60 Hz Solenoid  
 "24NO" Option - Normally Open (energize to close) Main Valve, 24vac/60 Hz Solenoid  
 "NS" Option\* - Non-Standard Solenoid (specify Voltage/Frequency/AC/DC/Operation)  
 V \_\_\_\_\_ Hz \_\_\_\_\_ AC/DC \_\_\_\_\_ NO/NC \_\_\_\_\_

- Check all that apply  "MO" Option\* - Manual Operator on Solenoid Valve (to control during power failure)  
 "RV" Option - Pilot Installed on Reverse Side  
 "GL" Option\* - Liquid Filled Pressure Gauge

\*Adder to standard price applies

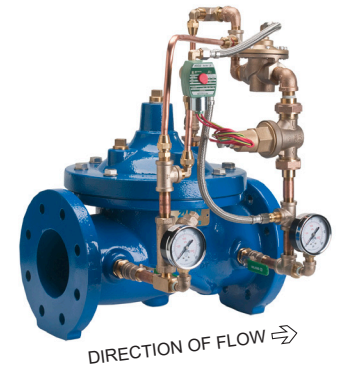

1747 Commerce Way  
Paso Robles, CA 93446  
Phone: 855-663-9876  
Fax: 805-237-7197

Customer Service Representatives available  
Monday through Friday 5:30 a.m. to 5:00 p.m., PST  
Fax completed forms to 805-237-7197, attention: Sales  
Call 855-663-9876, wilkinscs@zurn.com  
or visit us online at www.zurn.com

