

# MODEL ZW209Q - Pressure Reducing Valve with Downstream Surge Protection



## Control Valve Order Form

Customer: \_\_\_\_\_ Date: \_\_\_\_\_

Contact: \_\_\_\_\_ Email: \_\_\_\_\_

Telephone/Fax: \_\_\_\_\_ Ref. P. O. \_\_\_\_\_

### Required Valve Information

All returns are subject to a restocking/refurbishing fee. Contact Customer Care for details on return policies.

Quantity: \_\_\_\_\_

Size: (Check one)    1-1/4"    1-1/2"    2"    2-1/2"    3"    4"    6"    8"    10"    12"    14"    16"


#### Function Options:

- Check all that apply
- "C" Option \* - Check Valve with Isolation Valve
  - "L" Option \* - Closing Speed Control
  - "O" Option \* - Opening Speed Control (Standard on 4" or smaller)

Valve body is ductile iron, epoxy coated

#### Body Options:

- Check one
- Standard - Full Port Globe Body
  - "A" Option - Angle Style Body (1-1/4" - 10")
  - "R" Option - Reduced Port Body (3" - 10" Flanged only)

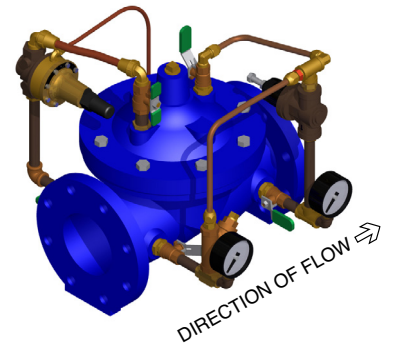

#### End Connections:

- Check one
- Standard - ANSI Class 150 Flanges (1-1/2" - 16")
  - "G" Option - IPS Grooved (1-1/2" - 10")
  - "TH" Option - NPT Threaded (1-1/4" - 3")
  - "Y" Option \* - ANSI Class 300 Flanges (1-1/2" - 16")

#### Main Valve Options:

- Check all that apply
- Standard - Stainless Steel Seat, Seal Ring Retainer, and Stem Guide
  - "V" Option \* - Viton Rubber Internals, Rated 180°F (only available on 1-1/4" - 6", must combine with "LP" or "HP" Option)
  - "Z" Option \*<sup>1</sup> - Visual Position Indicator

#### Pilot Options:

- Check one
- Standard - Isolation Valves, Inlet and Outlet Pressure Gauges, and "Wye" Type Strainer
- 
- Check one
- Standard - PRXL Pilot (15 - 150 psi Pressure Reducing), PV-RLF (35 - 200 psi Surge Protection)
  - "LP" Option \* - PV-PRD Pilot (5 - 25 psi Pressure Reducing)  
PV-RLF (10 - 35 psi Surge Protection)
  - "HP" Option \* - PV-PRD Pilot (30 - 300 psi Pressure Reducing)  
PV-RLF (150 - 300 psi Surge Protection)
- 
- Check all that apply
- Standard - Copper Tubing and Brass Fittings
  - "SP" Option \* - All Stainless Steel Pilotry (replaces all Brass Fitting, Pilot Valve & Copper Tubing. "GL" Option included)
  - "SH" Option \* - Stainless Steel Braided Hoses (only replaces Copper Tubing)
- 
- Check all that apply
- "RV" Option \* - Pilots Installed on Reverse Side
  - "GL" Option \* - Liquid Filled Pressure Gauge
  - "SO" Option \*<sup>1</sup> - Limit Switch Open Trip
  - "SC" Option \*<sup>1</sup> - Limit Switch Closed Trip
  - "SD" Option \*<sup>1</sup> - Limit Switch Dual Trip

\*Adder to standard price applies

<sup>1</sup>Limit switch and position indicator options cannot be combined

1747 Commerce Way  
Paso Robles, CA 93446  
Phone: 855-663-9876  
Fax: 805-237-7197

Customer Service Representatives available  
Monday through Friday 5:30 a.m. to 5:00 p.m., PST  
Fax completed forms to 805-237-7197, attention: Sales  
Call 855-663-9876, wilkinscs@zurn.com  
or visit us online at www.zurn.com

