

# Model ZW215FP - Fire Pump Suction Control Valve

## Control Valve Order Form



Customer: \_\_\_\_\_ Date: \_\_\_\_\_

Contact: \_\_\_\_\_ Email: \_\_\_\_\_

Telephone/Fax: \_\_\_\_\_ Ref. P. O. \_\_\_\_\_

### Required Valve Information

Quantity: \_\_\_\_\_

All returns are subject to a restocking/refurbishing fee.  
Contact Customer Care for details on return policies.

Size: (Check one)  2"  2-1/2"  3"  4"  6"  8"  10"


Valve body is ductile iron, epoxy coated

#### Body Options:

- Check one  Standard - Full Port Globe Body  
 "A" Option - Angle Style Body

#### End Connections:

- Check one  Standard - ANSI Class 150 Flanges (2" - 10")  
 "G" Option - IPS Grooved (2" - 10")  
 "TH" Option - NPT Threaded (2" - 3")  
 "Y" Option \* - ANSI Class 300 Flanges (2" - 10")

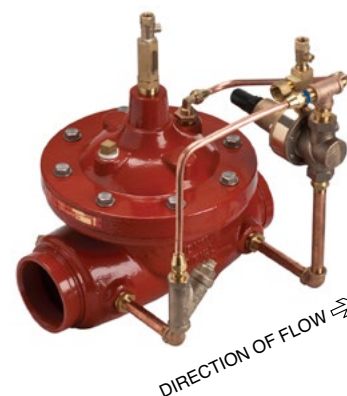

#### Main Valve Options:

- Standard - Stainless Steel Seat, Seal Ring Retainer, and Stem Guide

#### Pilot Options:

- Standard - "Wye" Type Strainer, Visual Position Indicator, and Sensing Line Bleed Valve  
 Standard - PV-RLF Pilot (10 - 35 psi)

- Check one  Standard - Copper Tubing and Brass Fittings  
 "SP" Option \* - All Stainless Steel Pilotry (replaces all Brass Fittings, Pilot Valve & Copper Tubing)

- Optional  "RV" Option - Pilot on Reverse Side

#### FM® Approved

\*Adder to standard price applies

1747 Commerce Way  
Paso Robles, CA 93446  
Phone: 855-663-9876  
Fax: 805-237-7197

Customer Service Representatives available  
Monday through Friday 5:30 a.m. to 5:00 p.m., PST  
Fax completed forms to 805-237-7197, attention: Sales  
Call 855-663-9876, wilkinscs@zurn.com  
or visit us online at www.zurn.com

