




Z1194 OIL LEVEL SENSOR RETROFIT KIT

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

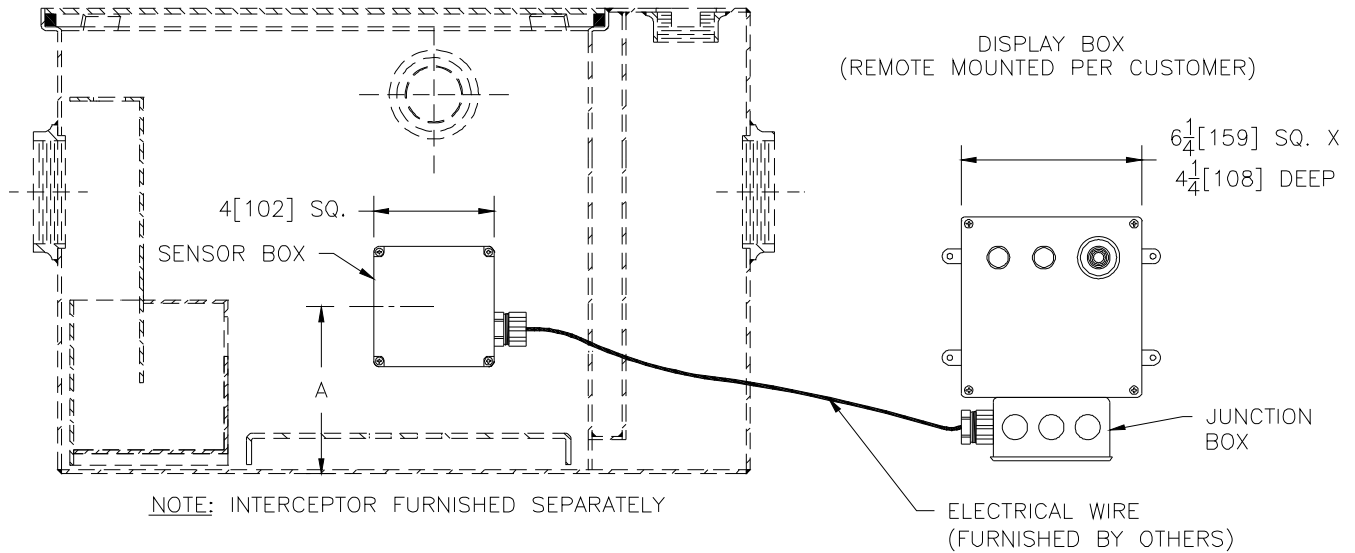

Z1186	
Flow Rate G.P.M. [L.P.M]	A-Dim. Inches [mm]
10 [38]	5 7/16 [138]
15 [57]	5 7/16 [138]
20 [76]	6 5/8 [168]
25 [95]	7 3/4 [197]
35 [133]	7 3/4 [197]
50 [189]	9 1/16 [230]

Z1188	
Flow Rate G.P.M. [L.P.M]	A-Dim. Inches [mm]
75 [289]	10 [254]
100 [379]	15 3/8 [391]
125 [473]	15 11/16 [399]
150 [568]	17 5/16 [440]
200 [757]	21 1/16 [535]
250 [946]	27 13/16 [707]
300 [1136]	32 [813]
350 [1325]	35 5/16 [897]
400 [1514]	39 5/16 [999]
450 [1704]	40 3/8 [1026]
500 [1893]	43 3/16 [1097]

ENGINEERING SPECIFICATION: ZURN Z1194 Oil level sensor retrofit kit with a fiberglass sensor box containing an electronic oil level sensor, a fiberglass display box with one green power light, red oil level light, audible alarm, and junction box. To be used for retrofit applications on Zurn Z1186 and Z1188 oil interceptors. Power supply 100 to 240 VAC at 47 to 63 Hz, G.F.C.I.
 Caution: Interceptor must be cleaned of solids and other debris and the sensors wiped off on a regular basis in order to ensure proper operation of the system. Z1194 TO BE USED WITH INTERCEPTORS FOR ON THE FLOOR INSTALLATION ONLY.

REV. E DATE: 06/22/11 C.N. NO. 121468
DWG. NO. 58547 PRODUCT NO. Z1194