




Z1726

ADJUSTABLE FLOOR DRAIN MEDIUM DUTY WITH ROUND TOP

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

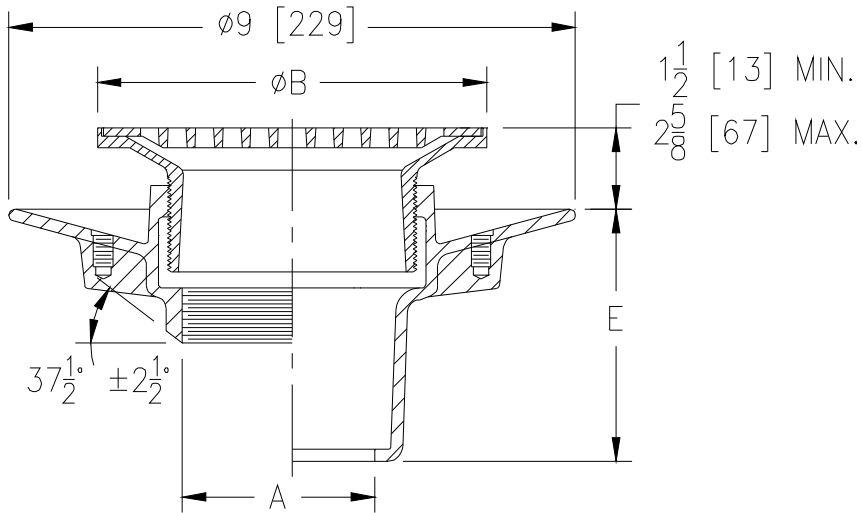

Dimensions In Inches [mm]		Approx. Wt. Lbs. [kg]	Strainer Open Area Sq. In. [cm ²]
A Pipe Size	B Strainer Dia.		
2,3 [51,76]	5 [127]	13 [6]	7 [45]
2,3,4 [51,76,102]	6 [152]	13 [6]	11 [71]
2,3,4 [51,76,102]	7 [178]	14 [6]	15 [97]
3,4,6 [76,102,152]	8 [203]	16 [7]	20 [129]
6 [152]	10 [254]	19 [9]	27 [174]

ENGINEERING SPECIFICATION: ZURN Z1726

All Type 304 (CF8) stainless steel adjustable floor drain with anchor flange (clamp collar with seepage holes, when specified), and 6" [152mm] diameter medium-duty vertically adjustable, satin finish top.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

2,3,4, 6 [51,76,102,152]

(Specify size/type) OUTLET

___ BW Butt-weld
(Specify Sch. 10 or 40)

'E' BODY HT. DIM.

2-7/8 [73]

2,3,4 [51,76,102]

___ IC Inside Caulk

4-3/8 [111]

2,3,4 [51,76,102]

___ IP Threaded

2-7/8 [73]

PREFIXES

- ___ Z Type 304 (CF8) Stainless Steel Body and Top Assembly*
- ___ ZM Type 316 (CF8M) Stainless Steel Body and Top Assembly

SUFFIXES

- ___ -K Anchor Flange w/ Seepage Holes
- ___ -KC Anchor Flange w/ Seepage Holes and Clamp Collar
- ___ -RD5 5 [127] Diameter Type 304 Stainless Steel Top
- ___ -RD7 7 [178] Diameter Type 304 Stainless Steel Top
- ___ -RD8 8 [203] Diameter Type 304 Stainless Steel Top
- ___ -RD10 10 [254] Diameter Type 304 Stainless Steel Top
- ___ -VP Vandal-Proof Secured Top
- ___ -Y Stainless Steel Sediment Bucket

* Regularly furnished unless otherwise specified.