


Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

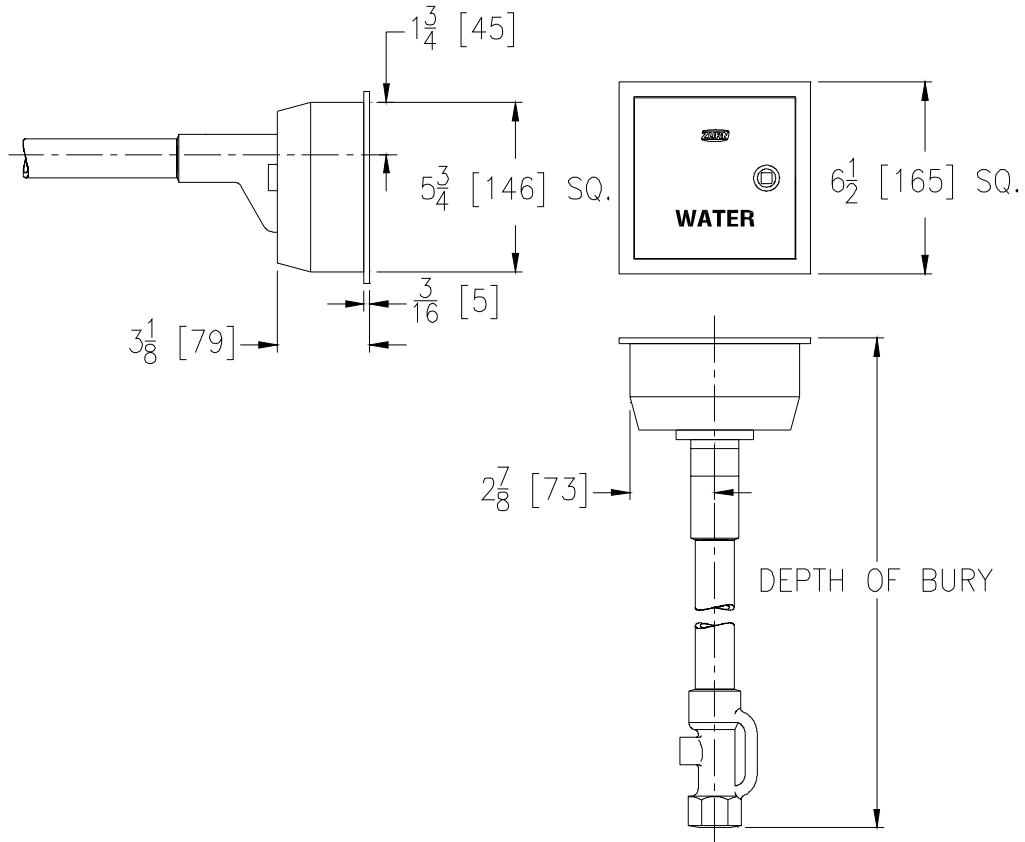

Depth of Bury in Feet [mm]	Approx. Wt. Lbs. [kg]
2 [610]	17 [8]
3 [914]	21 [10]
4 [1219]	25 [11]
5 [1524]	33 [15]
6 [1829]	39 [28]
7 [2134]	43 [20]
8 [2438]	47 [21]

ENGINEERING SPECIFICATION: Z1361 Encased, non-freeze ground hydrant for flush with grade or finished floor installation, complete with galvanized steel casing, all bronze interior parts, replaceable bronze seat and seat washer, non-turning operating rod with free-floating compression closure valve, and 3/4 [19] female IP inlet connection. Chrome-plated bronze box and hinged cover. Hydrant is equipped with a tapped 1/4 [6] drain port in the valve housing, and 3/4 [19] hose connection.

OPTIONS (Check/specify appropriate options)

SUFFIXES

- ___ -CL Cylinder Lock
- ___ -VB 3/4 [19] Adapter Vacuum Breaker
- ___ -RK Hydrant Parts Repair Kit