




# 8" TUBULAR SPOUT

## G61736 ('V')

TAG \_\_\_\_\_

### Engineering Specification: Zurn AquaSpec® G61736 ('V')

Polished chrome-plated tubular brass 8" [203mm] spout and cast atmospheric vacuum breaker with rigid connection and 3/8 NPSM female threaded outlet.

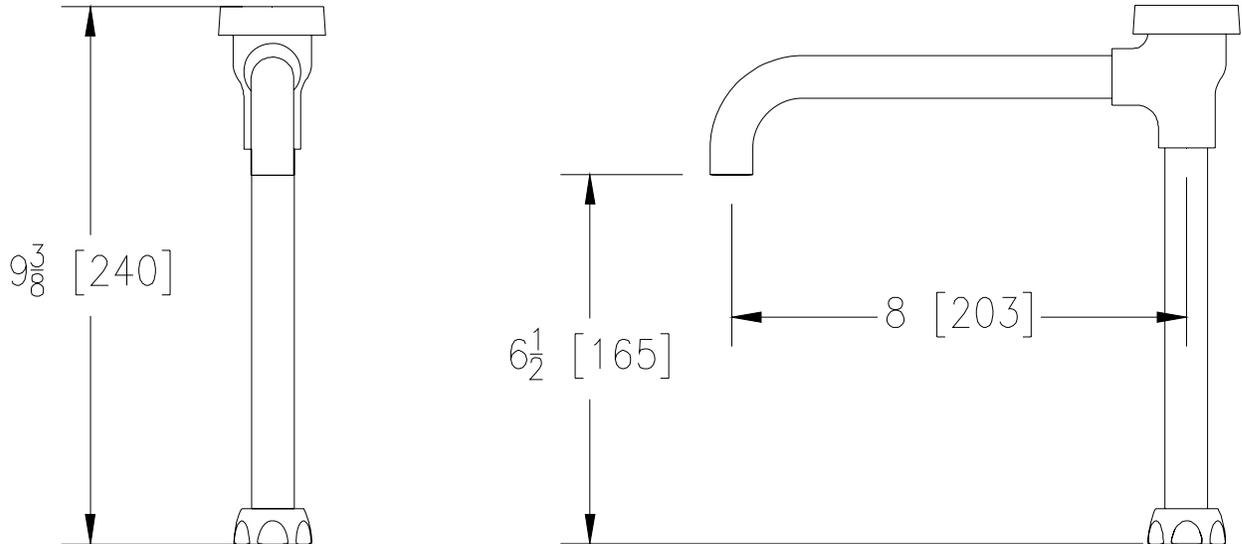

Note: All dimensions are for reference only. Do not use for pre-plumbing.

\* Female aerators require 60524001 (3/8 NPSM male x 3/4-27UNS male) adaptor and 58155015 o-ring

### OPTIONAL ACCESSORIES

| Suffix     | Description                                                                       |
|------------|-----------------------------------------------------------------------------------|
| ___ -FC___ | Flow Control in Base of Spout (Specify GPM Flow 0.5, 1.0, 1.5, 2.0)               |
| ___ -1F    | 2.2 GPM [8.3 L] Variable-Pressure Compensating Female Aerator                     |
| ___ -2F    | 2.2 GPM [8.3 L] Vandal-Resistant Pressure Compensating Female Aerator             |
| ___ -3F    | 0.5 GPM [1.9 L] Vandal-Resistant Pressure Compensating Female Spray Outlet        |
| ___ -4F    | 2.2 GPM [8.3 L] Vandal-Resistant Pressure Compensating Female Laminar Flow Outlet |
| ___ -5F    | 2.0 GPM [7.6 L] Female Spray Outlet                                               |
| ___ -6M    | 2.0 GPM [7.6 L] Male Serrated Tip Outlet                                          |
| ___ -7F    | 1.0 GPM [3.8L] Pressure Compensating Female Spray Outlet                          |
| ___ -11F   | Female Threaded Single Screen Outlet                                              |
| ___ -15F   | Female Full Flow Outlet                                                           |
| ___ -16F   | 1.0 GPM [3.8L] Vandal-Resistant Pressure Compensating Female Spray Outlet         |
| ___ -17F   | 1.5 GPM [5.7L] Vandal-Resistant Pressure Compensating Female Aerator              |
| ___ -18F   | 1.5 GPM [5.7L] Vandal-Resistant Pressure Compensating Female Laminar Flow Outlet  |
| ___ -19F   | 1.5 GPM [5.7 L] Anti-Microbial Pressure Compensating Female Laminar Flow Outlet   |
| ___ -21F   | 1.0 GPM [3.8L] Pressure Compensating Female Laminar Flow Outlet                   |
| ___ -22F   | 1.0 GPM [3.8L] Pressure Compensating Vandal-Resistant Female Laminar Flow Outlet  |
| ___ -23F   | 1.5 GPM [5.7L] Pressure Compensating Female Aerator                               |

ZURN INDUSTRIES, LLC ♦ COMMERCIAL BRASS OPERATION ♦ 2640 SOUTH WORK STREET ♦ FALCONER NY 14733

Phone: 1-800-997-3876 ♦ Fax: 1-919-775-3541 ♦ www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292