## NOTES:


- 1. FOR GRAVITY APPLICATIONS ONLY.
- 2. ALL GREEN TURTLE™ UNITS ARE MANUFACTURED WITH FIBERGLASS REINFORCED PLASTICS. PHYSICAL CHARACTERISTICS AND THICKNESS: POLYESTER RESIN AND E GLASS
- MINIMUM THICKNESS 3/16" WALL AND 5/16" TOP AND BOTTOM BOWLS.

  3. ALL UNITS ARE TO BE INSTALLED IN ACCORDANCE
- WITH THE MANUFACTURERS INSTALLATION INSTRUCTION.
- 4. STANDARD PIPING IS SCH 40 PVC.


- STANDARD PIPING IS SCH 40 PVC.
   EHT 50 300 UNITS COME STANDARD WITH 4" INLET (OTHER CUSTOM SIZES AVAILABLE ON REQUEST).
   EXTENSION COLLAR TO BE ORDERED TO MEET FINISHED GRADE, CUT ON SITE FOR FINAL ADJUSTMENT AND CAULKED WITH SIKAFLEX BY CONTRACTOR FOR WATERTIGHT SEAL.
   COVERS AVAILABLE FOR H20 TRAFFIC LOADING.
- PEDESTRIAN LOADING OR ABOVE GROUND INSTALLATION.
- 8. CONSULT GREEN TURTLE FOR OTHER SIZES.
- 9. 30 YEAR WARRANTY AGAINST LEAKS, AND STRUCTURAL FAILURE. 10. U.S. PATENT #5,746,912; CDN PATENT #2,195,822 ISPECIFICATIONS

PIPE SIZE: 4 INCH PVC SCH 40 INSTALLATION: BURIED ACCESSWAY SIZE: 24 INCHES


OPTIONS

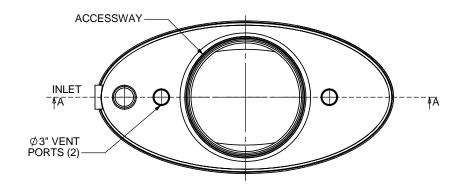


**TOP VIEW** 





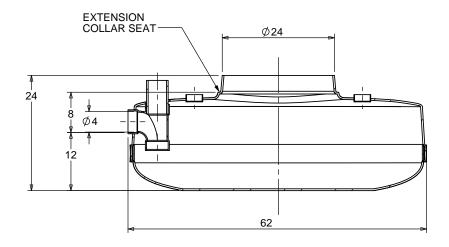

**SECTION A-A** 



ISOMETRIC VIEW

TITLE: HOLDING TANK REV DATE Proceptor\* DRAWN EHT 50 APRIL 24, 2007 . SIMKINS **ALL DIMENSIONS IN INCHES** APRIL 23, 2008 . SIMKINS MAY 22, 2009 PROJECT: WO: APRIL 26, 2012 MARCH 31, 2017 NOTES: A EHT 50 DRAWN BY: F CHANDLER DRAWN DATE 9/14/04 SCALE:1:20 DO NOT SCALE DRAWING SHEET 1 OF 1