NOTES:

- 1. FOR GRAVITY APPLICATIONS ONLY.
 2. ALL PROCEPTOR® UNITS ARE MANUFACTURED WITH
- FIBERGLASS REINFORCED PLASTICS. PHYSICAL CHARACTERISTICS AND THICKNESS: POLYESTER RESIN AND E GLASS

- POLYESTER RESIN AND E GLASS
 MINIMUM THICKNESS 3/16" WALL AND 5/16" TOP AND BOTTOM BOWLS.

 3. ALL PROCEPTOR® UNITS ARE TO BE INSTALLED IN ACCORDANCE
 WITH THE MANUFACTURERS INSTALLATION INSTRUCTION.

 4. STANDARD PIPING IS SCH. 40 PVC.

 5. GMC/OMC/SMC 50 300 UNITS COME STANDARD WITH 4" INLET AND
 OUTLET (OTHER PIPE SIZE OPTIONS AVAILABLE ON REQUEST).

 6. EXTENSION COLLAR TO BE ORDERED TO MEET FINISHED GRADE,
 CUT ON SITE FOR FINAL ADJUSTMENT AND CAULKED WITH
 SIKAFLEX BY CONTRACTOR FOR WATERTIGHT SEAL.

 7. COVERS AVAILABLE FOR EVO TRAFECI ONDING.
- 7. COVERS AVAILABLE FOR H20 TRAFFIC LOADING,
- PEDESTRIAN LOADING OR ABOVE GROUND INSTALLATION.


 8. CONSULT GREEN TURTLETM FOR OTHER SIZES.


 9. 30 YEAR WARRANTY AGAINST LEAKS, AND STRUCTURAL FAILURE.
- 10. U.S. PATENT #5,746,912; CDN PATENT #2,195,822

SPECIFICATIONS

PIPE SIZE: 4 INCH PVC SCH 40 INSTALLATION: ABOVE GROUND ACCESSWAY SIZE: 24 INCHES

OPTIONS

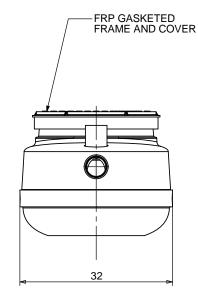

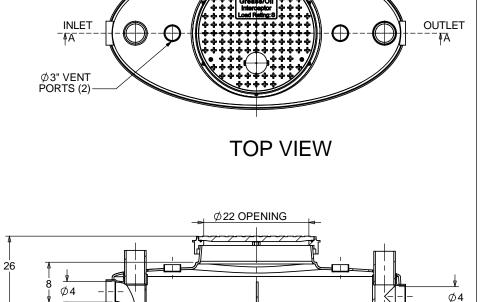


ACCESSWAY

12

SIDE VIEW

SECTION A-A



ISOMETRIC VIEW

50 GAL 18 GAL 17 GAL TOTAL WET VOLUME: MAX. OIL CAPACITY: MAX SOLIDS CAPACITY:

CONSULT LOCAL AUTHORITIES FOR MINIMUM SIZE OF SEPARATORS

TITLE: PROCEPTOR® OIL SEPARATOR	REV	DATE	DRAWN			Drocenter'		
OMC 50	11	MARCH 30, 2017				Proceptor*		
+	2				_			
ALL DIMENSIONS IN INCHES PROJECT: WO: NOTES:	3							
	4	OCTOBER 27, 2006	L. SIMKINS					
	5	JAN. 04, 2007	L. SIMKINS					
	6	SEPT. 21, 2010	L. SIMKINS		ZURN.			
	7	FEB. 22, 2012	L. SIMKINS		4			
	8	APRIL 05, 2012	L. SIMKINS					
	9	APRIL 22, 2013		1				
	10	SEPT. 04, 2013		SIZE	DWG.	NO.	REV.	
	DRA	DRAWN BY: F CHANDLER			A OMC 50		11	
	DRA	DRAWN DATE 9/14/04			E:1:20	DO NOT SCALE DRAWING SHEET 1 OF 1		