

### Architectural/Engineering Specification:

**Zurn Connected Backflow with Relief Valve Monitors** transmit data 24/7 to the Zurn plumbSMART™ web portal and mobile app. Proactively monitor your relief water discharge and system pressure data, receive real-time alerts for preset discharge volumes and low pressure parameters, and access system data for trends and predictive maintenance anytime and anywhere.

**Zurn Model 375AW1** Reduced Pressure Principle Backflow Preventer with Relief Valve Monitors provide high hazard protection and are ideal for use in Mechanical rooms, basements and enclosures where undetected relief valve discharge could potentially cause water damage. The responsive electronics controller constantly monitors zone pressure and the relief valve discharge to determine if a fouled check valve or water hammer is causing a relief valve discharge.

### Product Features: plumbSMART™ Portal

- Monitor discharge volume and pressure anywhere in your building
- Receive real-time alerts
- Manage maintenance tasks
- Receive insights on your data

**375AW1 Sizes:** 2 1/2", 3", 4", 6", 8", 10"

### Technical Specification:

Maximum working water pressure	175 PSI
Maximum working water temperature	140°F
Hydrostatic test pressure	350 PSI
End connections	
(Grooved for steel pipe)	AWWA C606
(Flanged Bolt Pattern)	ASME B16.42 Class 150

\*2 1/2 & 3" sizes use 4" body & reducer couplings

### Electrical Requirements:

Input Power Supply:	100 – 126V AC, 50/60Hz; 375 mA
Output Voltage:	4.0V DC; 0.44A
Operating Temperature:	20°F to 120°F
Storage Temperature:	-4°F to +175°F
Relative Humidity:	10% – 90%
Pressure Sensor:	Mounted on main backflow valve
Position Sensor:	Mounted on main relief valve

### Zurn Gateway:

- Communicates via Ethernet or LTE
- Works with all Zurn connected devices
- Connects all endpoints up to 1,000 ft radius
- After purchase request your gateway at: [zurn.com/plumbsmart-gateway](http://zurn.com/plumbsmart-gateway) or Call 1-844-987-6737



**Model 375AW1**

See **Model FCIS** spec sheet to combine with ACV for automatic flood control shutdown system



LEAD FREE



NSF/ANSI 61



UPC

### Options

(Suffixes can be combined)

- with flanged end NRS gate valves (standard)
- G - with grooved end NRS gate valves
- GF - with grooved inlet gate connection and flanged outlet gate connection
- FG - with flanged inlet gate connection and grooved outlet gate connection
- OSY - with flanged end OS&Y gate valves
- OSYG - with grooved end OS&Y gate valves
- BG - with grooved end butterfly valves with integral supervisory switches
- BF - with flanged end butterfly valves with integral supervisory switches
- R - with replacement spool (custom length) (see 375AR spec sheet for available lengths)

### Accessories

- OS & Y Gate valve tamper switch (OSY-40)
- Air gap (Model AG)
- Wireless Monitor Retrofit Kit for Conversion of existing model 375 (212-6-RFK-375W1, 8-10-RFK-375W1)

### Compliance and Certification

- Approved by the Foundation for Cross Connection Control and Hydraulic Research at the University of Southern California
- AWWA Compliant C511 (with gates only) and C550
- ASSE® Listed 1013
- IAPMO® Listed
- Meets the requirements of NSF/ANSI 61 \*(0.25% MAX. WEIGHTED AVERAGE LEAD CONTENT)

This device complies with Part 15 of the FCC Rules and ISSED Canada RSS Standards.

### Gateway Options

**(Required & Sold Separately)**

- LTE ZGW-LORA-W1-LTE
- Ethernet ZGW-LORA-W1-ETH

**Note:** plumbSMART™ is free-to-connect to a basic plan

**Note:** LTE charges will apply to basic plan

## How it works

The Model 375AW1 Connected Backflow with Wireless Monitor continuously monitors relief water discharge and system water pressure. Once per hour, water pressure data is transmitted to the plumbSMART™ portal. Facilities managers and/or maintenance personnel can view all data and trends in the plumbSMART™ portal and may opt to receive real-time alerts via email or text message if any of these readings exceed or fall below customizable parameters for high and low pressure levels. All notifications and alert parameters are adjustable via the plumbSMART™ portal. For more information, visit <https://www.zurn.com/innovation-efficiency/plumbsmart>.

Zurn Connected plumbing products are equipped with advanced sensors that track product usage and performance. This data is transmitted wirelessly via the built-in LoRa radio system to a Zurn Gateway, which then sends the data to the Zurn Cloud via Ethernet connection to the local area network (LAN) or via LTE cellular. The LTE cellular option means the data never touches your local network. Algorithms in the Zurn Cloud analyze the data, which is displayed on our secure web portal and mobile app, plumbSMART™. Zurn Connected plumbing products and data from plumbSMART™ may be customized to communicate with existing building management systems (BMS), depending on the communication protocols in use. Each Zurn Connected plumbing product comes with default alert parameters for water pressure, product usage, etc. Alert parameters can be customized in plumbSMART™ based on the specific needs of your building and maintenance protocols. Depending on the functionality of the equipment, some Zurn Connected Products can sense when to act in order to protect your building.


To access the plumbSMART™ portal, a Zurn Gateway must be installed within 1,000 feet of the connected product, and Connected products must be registered with Zurn plumbSMART™. A single Zurn Gateway can be used to connect hundreds of Zurn Connected plumbing products.

### Connecting to the plumbSMART™ Portal:


1. Document the serial number from the label inside the electronics enclosure. The serial number is printed on the left side of the label below the QR code.
2. Visit [www.zurn.com/plumbSMART-connect](http://www.zurn.com/plumbSMART-connect) to save time and money on your installation. You can also call us at 844-987-6737.
3. Provide the serial number and contact name, email address, and basic information about the installation site.
4. We will activate your plumbSMART™ account, set up your enterprise, and give you guidance on how to register each connected product as you install it.
5. We will send a confirmation email with a link, or you can go to [plumbsmart.zurn.com](http://plumbsmart.zurn.com) to log into your plumbSMART™ account for the first time.
6. Add other users and installers to your plumbSMART™ account.
7. Make sure you and/or your installers have the plumbSMART™ mobile app, which you can download from the iPhone App Store or Google Play.
8. Using the mobile app, scan or enter the serial number to register and locate each connected plumbing product as you install it.
9. Watch the how-to videos in the plumbSMART™ portal's support section if you get stuck, or call us at 844-987-6737 for support.




**MODEL 375AW1 2-1/2", 3" (STANDARD & METRIC)**

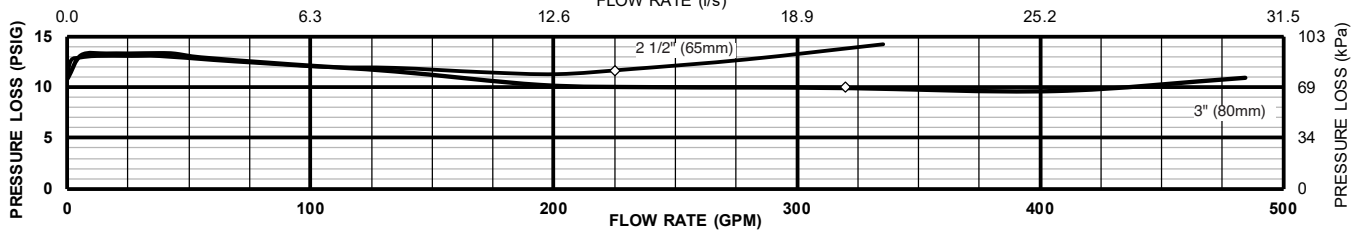

**MODEL 375AW1 4" & 6" (STANDARD & METRIC)**

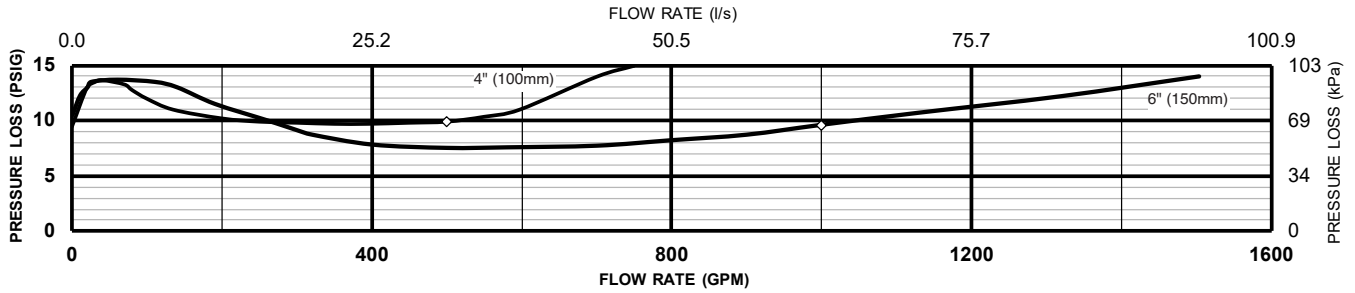


**MODEL 375AW1 8" & 10" (STANDARD AND METRIC)**

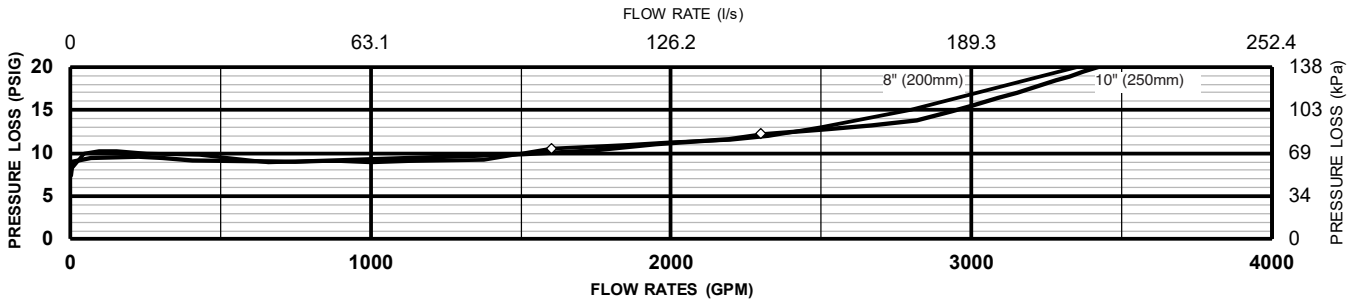

**Relief Valve Discharge Rates**


(Worst case condition - If 1st check or relief valve is lodged wide open)

**Model 375 & 475 RP & RPDA**  
Backflow Preventers

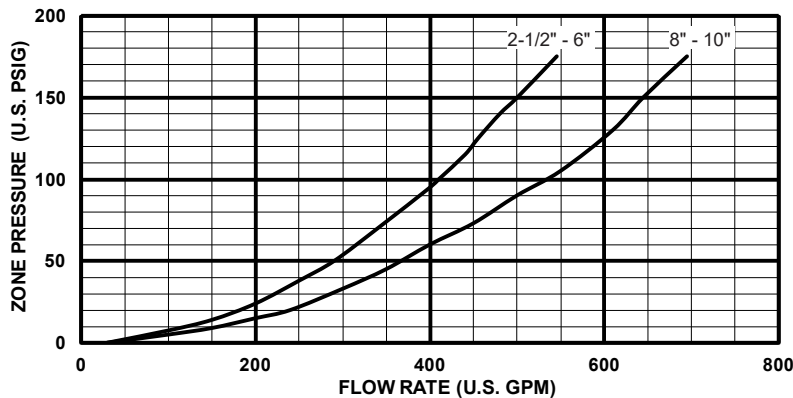

**Materials**


Main valve body Ductile Iron ASTM A 536  
 Access covers Ductile Iron ASTM A 536  
 Coatings NSF Approved electrostatic epoxy  
 Finish Internals Stainless Steel, 300 Series  
 Fasteners & Springs NORYL™  
 Seal rings Stainless Steel, 300 Series  
 O-rings EPDM (FDA approved)  
 Sensing line Buna Nitrile (FDA approved)  
 Switch Cover Stainless Steel, braided hose  
 Nylon, UV resistant, glass filled

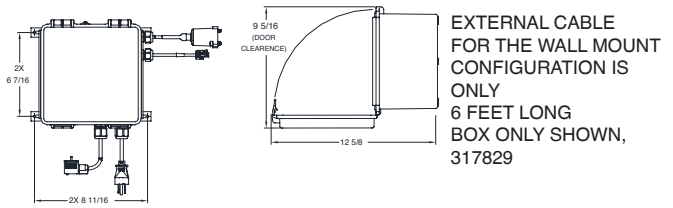

EXTERNAL CABLE FOR THE WALL MOUNT CONFIGURATION IS ONLY 6 FEET LONG BOX ONLY SHOWN, 317829

**Dimensions & Weights (does not include pkg.)**

MODEL 375AW1 SIZE	WEIGHT														
	WITHOUT GATES		WITH NRS GATES (GXF)		WITH OS&Y GATES (GXF)		WITH NRS GATES (GXG)		WITH OS&Y GATES (GXG)		WITH BUTTERFLY VALVES (GXG)		WITH BUTTERFLY VALVES (GXF)		
in.	mm	lbs.	kg	lbs.	kg	lbs.	kg	lbs.	kg	lbs.	kg	lbs.	kg	lbs.	kg
2 1/2	65	102	46	196	89	204	93	188	85	196	89	144	65	154	70
3	80	101	46	216	98	222	101	206	93	212	96	146	66	159	72
4	100	88	40	227	103	242	110	206	93	216	98	136	62	158	72
6	150	141	64	361	164	377	171	331	150	347	157	215	98	245	111
8	200	310	141	762	346	786	357	762	246	767	348	454	206	500	227
10	250	363	165	990	449	1048	475	868	394	926	420	579	263	637	289

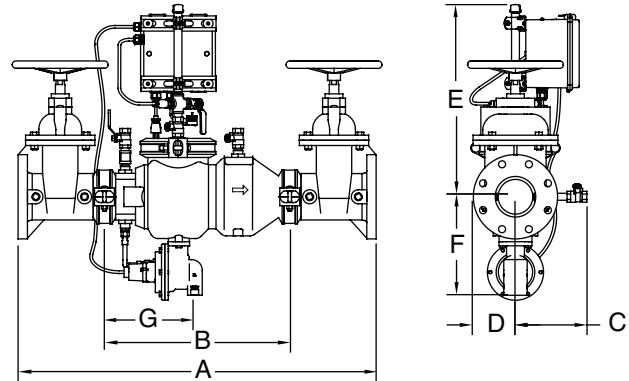


Attention: Model 375AW1 (grooved body) and Model 375W1 (flange body) have different lay lengths.  
 Relief Valve discharge port:  
 2 1/2" - 6" - 2.75 sq. in.  
 8" - 10" - 3.69 sq. in.

MODEL 375AW1 SIZE	DIMENSION (approximate)																						
	A		A WITH BUTTERFLY VALVES		B LESS GATE VALVES		C		D		E OS&Y OPEN		E OS&Y CLOSED		E NRS GATE		E WITH BUTTERFLY VALVES		F		G		
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	
2 1/2	65	35 1/8	892	32 1/8	816	20 1/8	511	7 1/4	184	4 1/2	114	26 1/8	663	26 1/8	663	26 1/8	663	26 1/8	663	11	279	9 5/8	247
3	80	36 1/8	918	33	838	20 1/8	511	7 1/4	184	4 1/2	114	26 5/16	668	26 5/16	668	26 5/16	668	26 5/16	668	11	279	9 5/8	247
4	100	38 1/4	972	33 1/4	845	19 7/8	505	8	203	4 1/2	114	22 1/2	572	26 1/2	673	26 1/2	673	26 1/2	673	11	279	9 5/8	247
6	150	47 1/4	1200	40 1/4	1022	25 7/8	657	10	254	5 1/2	140	30 1/2	730	30 1/2	730	30 1/2	730	30 1/2	730	12 3/8	314	13	330
8	200	62	1575	55	1397	38 1/2	978	11	279	10	254	37	940	34 1/2	876	34 1/2	876	34 1/2	876	15 3/8	391	17 5/16	440
10	250	64 5/8	1641	58 1/2	1485	38 1/2	978	12	305	10	254	45 5/8	1159	34 3/4	883	34 3/4	883	34 1/2	876	15 3/8	391	17 1/8	435

**Typical Installation**

Local codes shall govern installation requirements. Unless otherwise specified, the assembly shall be mounted at a minimum of 12" (305mm) and a maximum of 30" (762mm) above adequate drains with sufficient side clearance for testing and maintenance. The installation shall be made so that no part of the unit can be submerged.

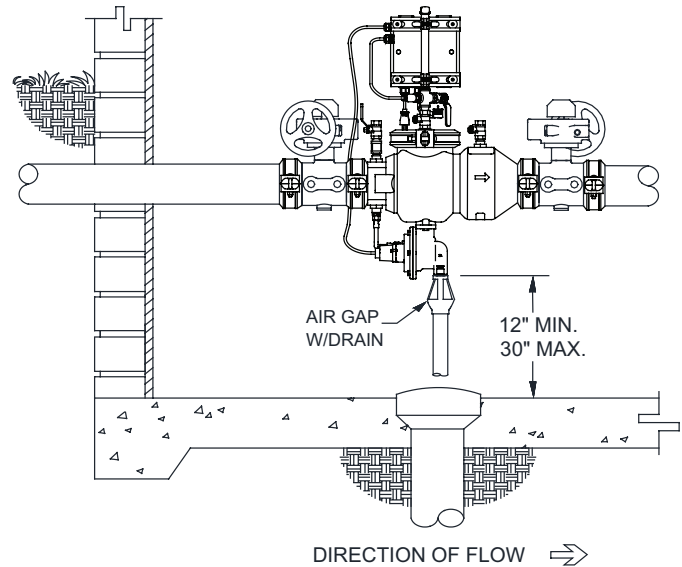

INDOOR INSTALLATION (375AW1 with BG option)

**Detailed Specifications**

The Reduced Pressure Principle Backflow Prevention Assembly shall be certified to NSF/ANSI 61, ASSE® Listed 1013, and supplied with full port gate valves. The main body and access cover shall be epoxy coated ductile iron (ASTM A 536), the seat ring and check valve shall be NORYL™, the stem shall be stainless steel (ASTM A 276) and the seat disc elastomers shall be EPDM. The checks and the relief valve shall be accessible for maintenance without removing the device from the line. The Reduced Pressure Principle Backflow Prevention Assembly shall be a ZURN WILKINS Model 375AW1.