




NOTES:

1. FOR GRAVITY APPLICATIONS ONLY.
2. ALL PROCEPTOR UNITS ARE MANUFACTURED WITH FIBERGLASS REINFORCED PLASTICS. PHYSICAL CHARACTERISTICS AND THICKNESS: POLYESTER RESIN AND E GLASS. MINIMUM THICKNESS 1/4" WALL AND 3/8" TOP AND BOTTOM BOWLS.
3. ALL PROCEPTOR UNITS ARE TO BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S INSTALLATION INSTRUCTION.
4. STANDARD PIPING IS SCH. 40 PVC.
5. GMC/OMC 500 - 3000 UNITS COME STANDARD WITH 4" INLET AND OUTLET (OTHER PIPE SIZE OPTIONS AVAILABLE ON REQUEST).
6. EXTENSION COLLAR TO BE ORDERED TO MEET FINISHED GRADE, CUT ON SITE FOR FINAL ADJUSTMENT AND CAULKED WITH SIKAFLEX BY CONTRACTOR FOR WATERTIGHT SEAL.
7. COVERS AVAILABLE FOR H20 TRAFFIC LOADING, PEDESTRIAN LOADING OR ABOVE GROUND INSTALLATION.
8. CONSULT GREEN TURTLE FOR OTHER SIZES.
9. 30 YEAR WARRANTY AGAINST LEAKS, AND STRUCTURAL FAILURE DUE TO MANUFACTURING DEFECTS.
10. U.S. PATENT #5,746,912; CDN PATENT #2,195,822

CONSULT LOCAL AUTHORITIES FOR MINIMUM SIZE OF SEPARATORS

PROCEPTOR GMC NOMINAL TANK DIMENSIONS (INCHES)

MODEL SIZE (CAPACITY US GAL)	GREASE CAPACITY (US GAL)	SOLIDS CAPACITY (US GAL)	PIPE SIZE (P)	INLET (A)	OUTLET (B)	BURIAL (C)	HEIGHT (D)	SKU
500	279	87	4	32	30	12	48	20000001
			6	32	30	12	48	20000101
			8	32	30	14	50	20000201
750	410	200	4	45	43	12	61	20100001
			6	45	43	12	61	20100101
			8	45	43	14	63	20100201
1000	577	295	4	59	57	12	75	20200001
			6	59	57	12	75	20200101
			8	59	57	14	77	20200201
1300	707	446	4	74	72	12	90	20400001
			6	74	72	12	90	20400101
			8	74	72	14	92	20400201
1500	819	540	4	85	83	12	101	20500001
			6	85	83	12	101	20500101
			8	85	83	14	103	20500201

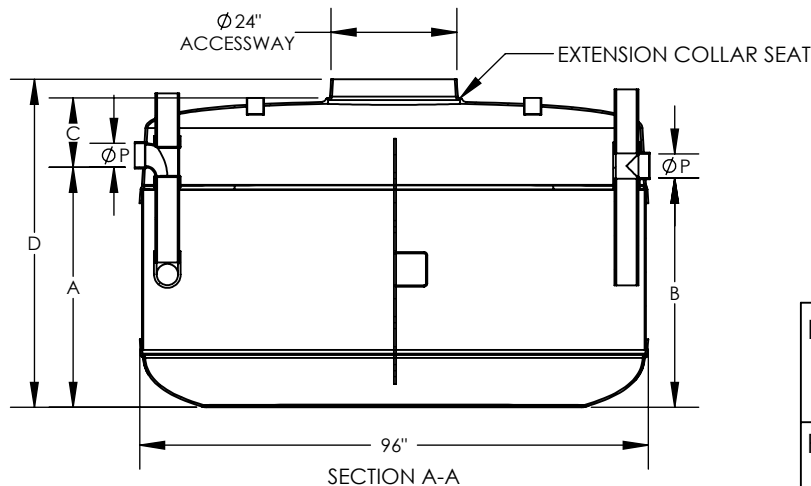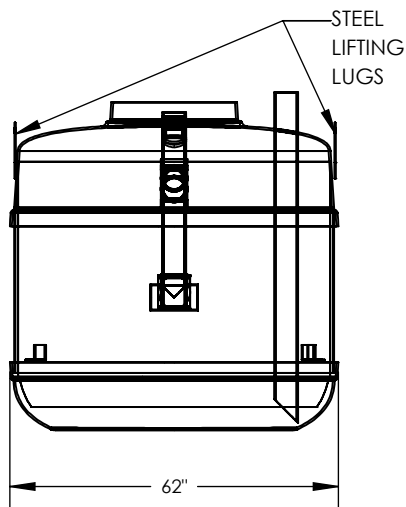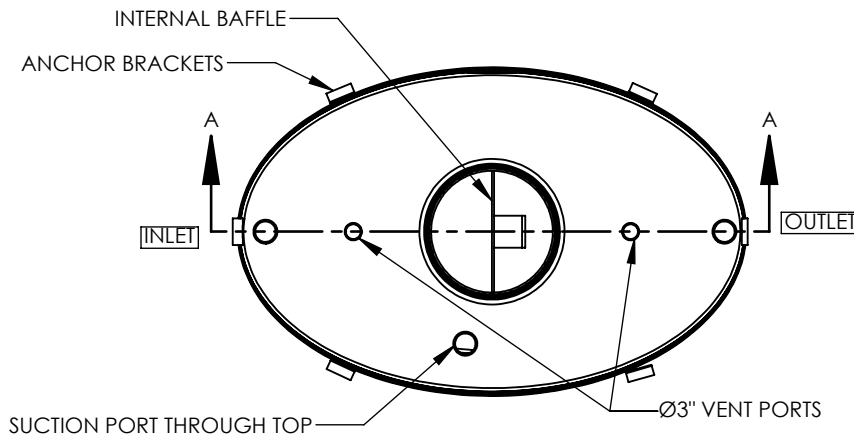

DWG. TITLE:
9460 GMC S24M TSUC

PROJECT:



SIZE A DRAWING NOT TO SCALE

DWG #: 18-4661-S REV. 0