




GT2702-EXT

POLYETHYLENE GREASE INTERCEPTOR W/6 [152]
EXTENSION

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

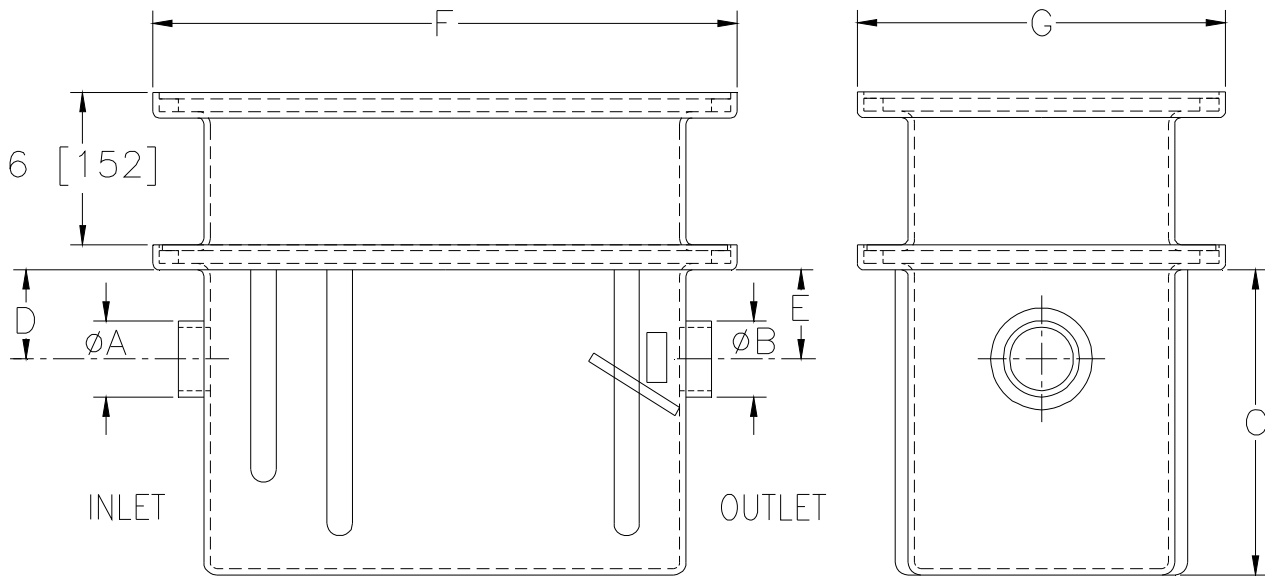

Product	'A' & 'B' Inlet /Outlet	Flow Rate G.P.M. [L.P.M]	Grease Capacity Lbs. [kg]	Dimensions In Inches [mm]				
				C	D	E	F	G
___ GT2702-04	2 [51] Female NPT	4 [15]	8 [4]	9 1/2 [241]	2 [51]	2 [51]	15 [381]	10 [254]
___ GT2702-07	2 [51] Female NPT	7 [26]	14 [6]	11 [279]	3-1/4 [83]	3-1/4 [83]	20 [508]	14-1/2 [368]
___ GT2702-10	2 [51] Female NPT	10 [38]	20 [9]	12 [305]	3-1/2 [89]	3-1/2 [89]	23 [584]	14-1/2 [368]
___ GT2702-15	2 [51] Female NPT	15 [57]	30 [14]	13 [330]	3-1/2 [89]	3-1/2 [89]	23 [584]	19-1/2 [495]
___ GT2702-20	2 [51] Female NPT	20 [76]	40 [18]	14 [356]	3-1/2 [89]	3-1/2 [89]	29 [737]	19-1/2 [495]
___ GT2702-25	3 [76] Female NPT	25 [95]	50 [23]	17 [432]	4 [102]	4 [102]	32 1/2 [826]	19-1/2 [495]
___ GT2702-35	3 [76] Female NPT	35 [132]	70 [32]	18 [457]	4 [102]	4 [102]	32 1/2 [826]	22 [559]
___ GT2702-50	3 [76] Female NPT	50 [189]	100 [45]	18 [457]	4 [102]	4 [102]	37 [940]	25 [635]
___ GT2702-75	3 [76] Female NPT	70 [265]	150 [68]	25 [635]	5-3/4 [146]	5-3/4 [146]	44-1/4 [1124]	25 [635]

GT2702-EXT Grease Interceptor

Recommended for removing and retaining grease from wastewater in kitchen and restaurant areas where food is prepared. Constructed of non-corrosive polyethelene, the interceptor handles continuous temperatures to 212° F. Trap is furnished with NPT connections, removable flow diffusing baffles, 6 [152] extension and external vented flow control device.

* Regularly furnished unless otherwise specified.

Zurn Industries, LLC | Light Commerical Plumbing Products
1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929
In Canada | Zurn Industries Limited
3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292
www.zurn.com

Rev. -
Date: 10/20/2016
C.N. No. 135361
Prod. | Dwg. No. GT2702-EXT