



Z1400-S


FLOOR CLEANOUT WITH "TYPE S" COVER AND EZ1™ TECHNOLOGY

SPECIFICATION SHEET

TAG _____

**PATENT
PENDING**

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

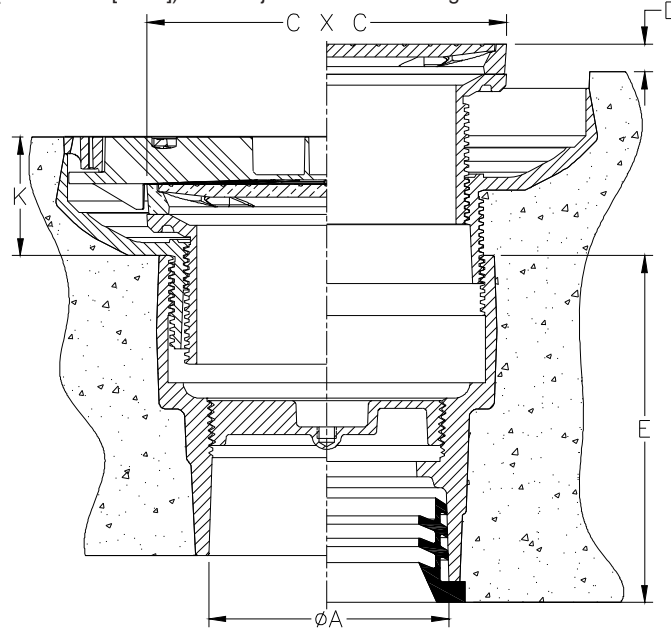

Dimensions in Inches [mm]							Approx. Wt. Lbs [kg]
A Pipe Size	Cover Designation	C	D		K		
			Min	Max	Min	Max	
2 [51]	-5S	5 X 5 [127 X 127]	0	1 [25]	1-15/16 [49]	3-1/8 [79]	12 [5]
3-4 [76-102]		5 X 5 [127 X 127]	0	1 [25]	1-15/16 [49]	3-1/8 [79]	14 [6]
2 [51]	-6S	6 X 6 [152 X 152]	0	31/32 [25]	2 [51]	3-3/16 [81]	13 [6]
3-4 [76-102]		6 X 6 [152 X 152]	0	31/32 [25]	2 [51]	3-3/16 [81]	15 [7]

ENGINEERING SPECIFICATION:

ZURN Z1400-SZ1 cleanout, Dura-Coated cast iron body with bottom outlet, with gas and water tight threaded ABS tapered plug, and top assembly. EZ1™ drainage series is engineered to simplify product installation and comprised of concrete shield to provide up to 1" [25] of vertical post pour adjustment, pre-packaged shims for tilt correction, and integrated, self-contained "Type S" light duty scoriated cover with rough-in cover for protection during concrete pour. Cleanout is designed in accordance with ASME A112.36.2M.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

2-3 [51-76]
 4 [102]
 2-4 [51-102]
 3 [76]

(Specify size/type) OUTLET

_____ NH No-Hub
 _____ NH No-Hub
 _____ NL Neo-Loc
 _____ NL Neo-Loc

'E' BODY HT. DIM.

4-3/4 [121]
 5 [127]
 4-3/4 [121]
 5-7/16 [138]

PREFIXES

_____ ZB D.C.C.I. w/ Polished Bronze Top
 _____ ZN D.C.C.I. w/ Polished Nickel Bronze Top*
 _____ ZS D.C.C.I. w/ Polished Stainless Steel Top

SUFFIXES

_____ -AR Acid Resisting Epoxy Coated Finish
 _____ -BP Bronze Plug
 _____ -G Galvanized Cast Iron
 _____ -TC Neo-Loc Test Cap Gasket (2-3-4 [51-76-102] NL Bottom Outlet Only)

_____ -UP 1-3/4 [44] Pre-Pour Adjustment Extension Adapter
 _____ -VP Vandal-Proof Screws

* Regularly furnished unless otherwise specified.