


AquaSense® **TAG**

Z6930-XL-GEN

Lavatory Faucet with Hydroelectric Generator

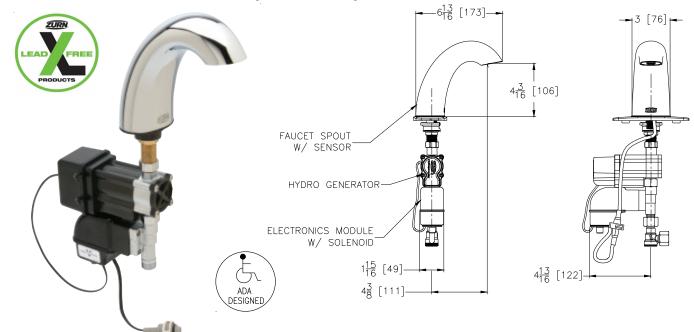

Flow Control Options

- □ -J 1.5 gpm/ 5.7 Lpm Vandal-Resistant Laminar Flow
- □ -K 1.0 gpm/ 3.8 Lpm Vandal-Resistant Laminar Flow
- □ -L 1.0 gpm/ 3.8 Lpm Vandal-Resistant Aerator

Engineering Specification

ADA compliant, battery powered, chrome plated sensor faucet for retrofit and new construction.

- Flow Rate
 - 1.5 gpm Vandal Resistant Aerator
- Occupant Detection

Infrared convergence-type proximity sensor Thirty Second Time out feature

Spout module

Chrome Plated Cast Brass

Also Includes

In-line filter

4 "AA" batteries

Inlet for a 1/2"[13] ball riser

5900 ELWIN BUCHANAN DRIVE ♦ SANFORD NC 27330 Phone: 1-800-997-3876 ♦ Fax: 919-775-3541 www.zum.com

In Canada: ZURN INDUSTRIES LIMITED 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 Phone: 905-405-8272 Fax: 905-405-1292

ZURN INDUSTRIES, LLC. ♦ COMMERCIAL BRASS OPERATION

Accessories

□ -ADM	Above Deck Mixer
□ -ADM-2	Above Deck Mixer w/8" Cover Plate
□ -CP4	Cover Plate 4"[102] Centers
□ -CP8	Cover Plate 8"[203] Centers
□ -DSA	Drug Screening Applications (Hardwired
	Applications)
□ -H4	Wrist Blade Handle for ADM
□ -LP	Line Purge 2 min/24 hr
□ -MT	Mixing Tee
□ -MV	Temperature Mixing Valve
□ -SH	Supply Hoses for Mixing Valve
□ -SSH	Single Stainless Supply Hose (-XL)
□ -TMV	Thermostatic Mixing Valve for Multiple
	Faucets
□ -TMV-1	Thermostatic Mixing Valve for Single
	Faucets
□ -	Other

Zurn Lead Compliant products (-XL) are manufactured to comply with state laws and local codes that mandate lead content levels less than one quarter of one percent (0.25%) total lead content by weighted average.

Architectural/Engineering Approval

The information contained in this document is subject to change without notice. Please contact Zurn for most up to date information

Date: 11/26/13