


Z104-C-R

15 [381] DIAMETER DEEP SUMP ROOF DRAIN WITH ROOF SUMP RECEIVER AND UNDERDECK CLAMP

SPECIFICATION SHEET	Γ
---------------------	---

TAG

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

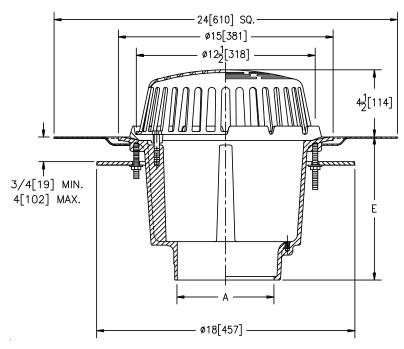

A- Pipe Size In. [mm]	Approx. Wt. Lbs. [kg]	Dome Open Area Sq. In. [cm ²]
3, 4 [76, 102]	EC [0E]	102[665]
6, 8 [152, 203]	56 [25]	103 [665]

ENGINEERING SPECIFICATION: ZURNZ104-C-R

15" [381mm] Diameter roof drain. Dura-Coated cast iron deep sump body with combination membrane flashing clamp/gravel guard, roof sump receiver, underdeck clamp and low silhouette Poly-Dome.

OPTIONS (Check/specify appropriate options)

3, 4, 6, 8 [76, 102, 152, 203]	No-Hub Neo-Loc	10 [254] 9-5/16 [237]
Z D.C.C.I. Body with Poly-Dome*		
ZA D.C.C.I. Body with High Aluminum Dome ZC D.C.C.I. Body with Cast Iron Dome	€	
SUFFIXES -AR Acid Resistant Epoxy Coated Finish -AW 3/4 [19] to 4 [102] Adjustable Water Leve (Specify Ht.)(ZC only) -E Static Extension (1 [25] thru 4 [102]) (Specify Ht) -EA Adjustable Extension Assembly (2-1/8 [54] thru 3-1/2 [89]) -FG Flush Grate -G Galvanized Cast Iron -HD 6-3/4 [171] High Aluminum Dome (148 Sq. In. [955 cm²] Open Area) -SC Secondary Clamping Collar	el Regulator	-SS Stainless Steel Mesh Screen Over Dome -VP Vandal Proof Secured Top -W2 2 [50] Internal Water Dam -W3 3 [76] Internal Water Dam -W4 4 [102] Internal Water Dam -84 Stainless Steel Perforated Gravel Guard -85 Stainless Steel Perforated Extension -89 2 [50] High External Water Dam

Zurn Industries, LLC | Specification Drainage Operation 1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929

In Canada | Zurn Industries Limited

3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292

Rev.

Date: 10/02/2017

C.N. No. 138222

Z104-C-R Prod. | Dwg. No.