



# QHPM-\_\_S

Stainless Steel  
Accuflow® Manifold


## Features and Benefits

### Installation Versatility

- Available completely preassembled for easy installation
- Customization allows for any application or configuration

### Multiple Configurations

- High-flow capacity applications
- Available with port configurations to support up to 12 separate heating loops
- Accepts optional actuators for separate loop control
- Individual circuit flow meters
- Integral balancing valves
- Accepts 3/8", 1/2", 5/8", or 3/4" Zurn PEX Performa® hy-PE-RTube™, or Alumicor® tubing



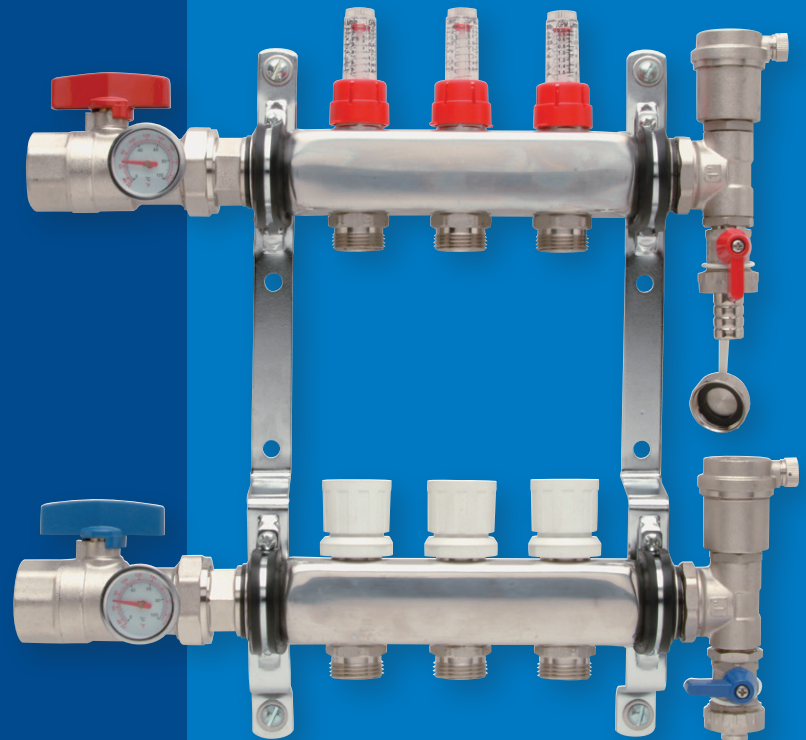


Stainless Steel Accuflow®  
Manifold - QHPM-3S



# QHPM-\_\_S

Stainless Steel Accuflow® Manifold

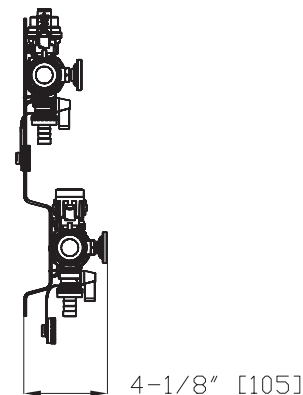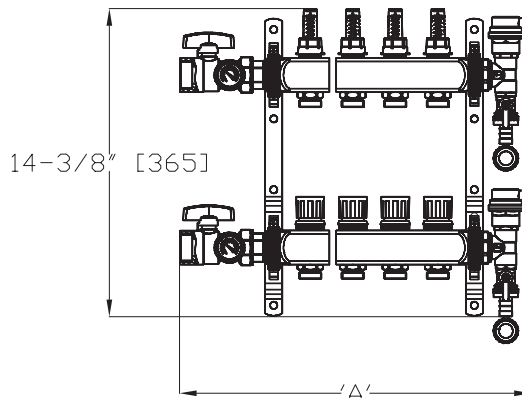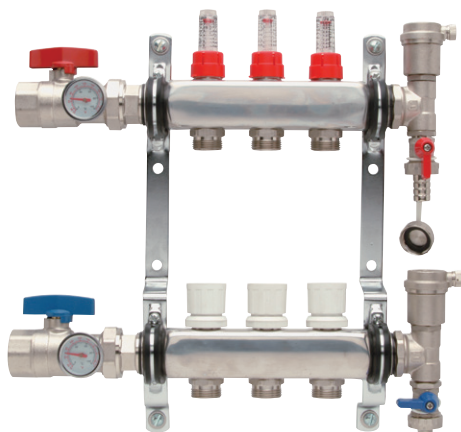

## ENGINEERING SPECIFICATIONS:

Zurn Stainless Steel Heating Manifold complete with supply and return isolation ball valves, automatic air vents, fill/drain valves, supply and return thermometers and mounting brackets. Manifold is available with 2 through 12 loop connections. Manifold is rated for 145 PSI at a maximum working temperature of 194° F. The supply side of each loop shall have a range of 0.25 to 1.3 GPM. The return side of each loop shall have a manual stop valve or an optional zone valve actuator capable of individual loop control. Supply and return loops shall be able to connect to 3/8", 1/2", 5/8", or 3/4" Zurn PEX Performa® hy-PE-RTube™, or Alumicor® tubing.

## APPLICATIONS

- Residential, commercial and industrial radiant floor/wall/ceiling heating
- Snow and ice melt systems
- Soil conditioning in greenhouse/stadium applications
- Hot water baseboard heating distributions
- Water distribution piping to manifolds, hydronic coils in air handlers, etc.
- Radiant cooling
- Underground fluid distribution

## ACCESSORIES (ORDER SEPARATELY AS SPECIFIED)

— QHMMC2S	3/8" PEX/PE-RT SS Manifold Connection Fitting
— QHMMC3S	1/2" PEX/PE-RT SS Manifold Connection Fitting
— QHMMCJS	5/8" PEX/PE-RT SS Manifold Connection Fitting
— QHMMC4S	3/4" PEX/PE-RT SS Manifold Connection Fitting
— QHPAPMMC2S	3/8" Alumicor SS Manifold Connection Fitting
— QHPAPMMC3S	1/2" Alumicor SS Manifold Connection Fitting
— QHPAPMMCJS	5/8" Alumicor SS Manifold Connection Fitting
— QHPAPMMC4S	3/4" Alumicor SS Manifold Connection Fitting
— QHMBMVDSS	Zone Valve Actuator for SS Manifolds

**ZURN PEX®, INC.**  
HIGHWAY 11 EAST COMMERCE, TX, USA 75428,  
PHONE: 885-ONE-ZURN (855-663-9876) FAX: 1-800-209-2148  
[www.zurn.com](http://www.zurn.com)

In Canada: **ZURN INDUSTRIES LIMITED**  
3544 NASHUA DRIVE, MISSISSAUGA, ONTARIO L4V 1L2,  
PHONE: 905/405-8272, FAX: 905/405-1292