

## SINK FAUCET Z843J4


$T_{\Lambda}$	
TAG	
17 10	

ADA



## Engineering Specifications: Zurn AquaSpec® Z843J4

Polished chrome-plated cast brass 8" [203mm] sink faucet with quarter turn ceramic disc cartridges, 3/8" [10mm] short swivel inlets providing adjustable centers from 7-1/4" [184mm] to 8-3/4" [222mm], integral service stops and a 9-1/2" [241mm] tubular brass swing spout with a 2.2 GPM [8.3 L] pressure compensating aerator (complying with ANSI A112.18.1 Standard for flow). Unit is furnished with 4" [102mm] vandal-resistant color-coded metal wrist blade handles.

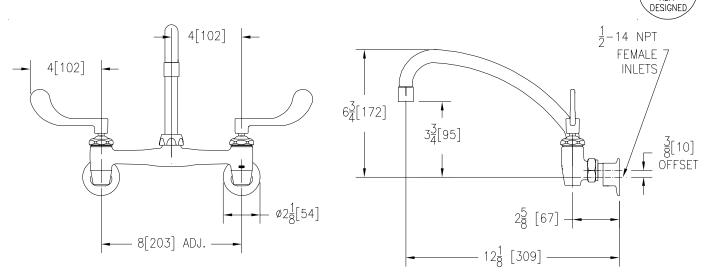

Note: All dimensions are for reference only. Do not use for pre-plumbing

## **OPTIONAL ACCESSORIES**

Suffix	Description
CS	Check Stops
HCT	Hot/Cold Text Indexes
LSI	2-1/2" [64mm] Long Swivel Inlets with Integral Stops
2F	2.2 GPM [8.3 L] Vandal-Resistant Pressure Compensating Female Aerator
3F	0.5 GPM [1.9 L] Vandal-Resistant Pressure Compensating Female Spray Outlet
4F 5F	2.2 GPM [8.3 L] Vandal-Resistant Pressure Compensating Female Laminar Flow Outlet
	2.0 GPM [7.6 L] Female Spray Outlet
7F	1.0 GPM [3.8L] Pressure Compensating Female Spray Outlet
11F	Female Threaded Single Screen Outlet
16F	1.0 GPM [3.8L] Vandal-Resistant Pressure Compensating Female Spray Outlet
17F	1.5 GPM [5.7L] Vandal-Resistant Pressure Compensating Female Aerator
18F	1.5 GPM [5.7L] Vandal-Resistant Pressure Compensating Female Laminar Flow Outlet
19F	1.5 GPM [5.7 L] Anti-Microbial Pressure Compensating Female Laminar Flow Outlet
20F	1.0 GPM [3.8L] Vandal-Resistant Pressure Compensating Anti-Microbial Female Laminar Flow Outlet
21F	1.0 GPM [3.8L] Female Laminar Flow Outlet
22F	1.0 GPM [3.8L] Vandal-Resistant Female Laminar Flow Outlet
23F	1.5 GPM [5.7L] Pressure Compensating Female Aerator
140	140° Restricted Swing Spout

ZURN INDUSTRIES, LLC ♦ COMMERCIAL BRASS OPERATION ♦ 2640 SOUTH WORK STREET ♦ FALCONER NY 14733 Phone: 1-800-997-3876 ♦ Fax: 1-919-775-3541 ♦ www.zurn.com