



Z843M1

Sink Faucet

TAG _____

Architectural/Engineering Specification:


Polished chrome-plated cast brass 8" sink faucet with quarter turn ceramic disc cartridges, 3/8" short swivel inlets providing adjustable centers from 7-1/4" to 8-3/4", integral service stops and a 6" centerline cast brass spout with chemical resistant atmospheric vacuum breaker, 3/4" hose threaded outlet, pail hook and adjustable wall brace. Unit is furnished with 2-1/2" vandal-resistant color-coded brass lever handles. Vacuum breaker is certified to the uniform plumbing code® , ASSE 1001- 2002 and CSA b64-01. (note: atmospheric vacuum breaker not intended for continuous pressure applications.)

Product Features:

- 6" Vacuum Breaker Spout with 3/4" Threaded Outlet, Brace and Pail Hook
- 2-1/2" Vandal Resistant Color Coded Lever Handles
- Ceramic Disc Cartridge
- Chrome-plated Cast Brass Body

Suffix Options:

- CS Check Stop
- FC 2.0 GPM [7.6 L] Laminar Flow Control in Base of Spout
- FC _____ Plain End Spout with Flow Control (Specify GPM Flow: 0.5, 1.0, 1.5)
- LSI 2-1/2" [64mm] Long Swivel Inlets with Integral Stops
- RC Rough Chrome Plated
- WHK Wall Hook
- 5H 5' [152cm] Vinyl Hose
- 6P Master Carton (Qty. 6)

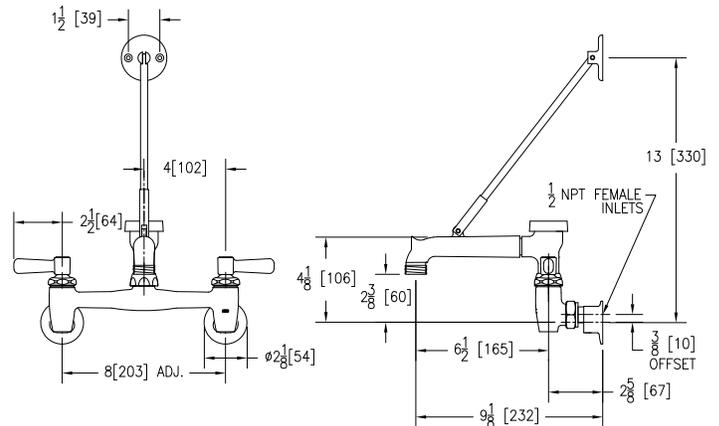

Rough-in/Overview dimensions

Compliance and Certification:

- ADA Compliant
- ASSE 1001- 2002
- CSA b64-01



Architectural/Engineering Approval

The information contained in this document is subject to change without notice.
Please contact Zurn for most up to date information.

Meets the American Disabilities Guidelines and ANSI A117.1 requirements when installed according to these requirements.

In Canada - Consult local codes and standards.

