



Z1400S-DP


FLOOR CLEANOUT ASSEMBLY W/ "TYPE S" COVER
AND DECK PLATE

SPECIFICATION SHEET

TAG _____

**PATENT
PENDING**

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

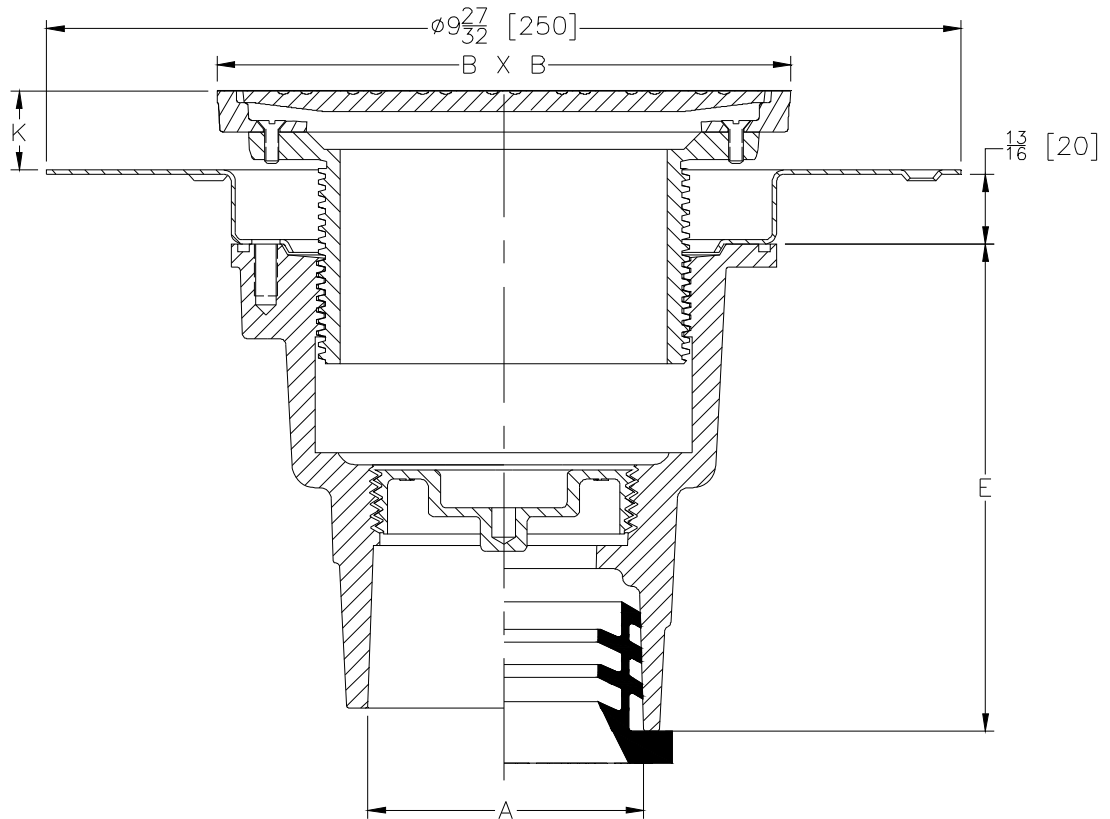

Dimensions In Inches				Approx. Wt. Lbs. [kg]
A Pipe Size	B X B Cover Top Size	K		
		Min.	Max.	
2-3 [51-76]	5 X 5 [127 X 127]	7/16 [11]	1-7/16 [37]	12 [5]

ENGINEERING SPECIFICATION:

Zurn Z1400S-DP cleanout, Dura-Coated cast iron body with gas and water tight cleanout plug, stainless steel deck plate, and "Type S" polished nickel bronze light duty top assembly. Cleanout is designed in accordance with ASME A112.36.2M.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

2 [51]
3 [76]
2 [51]
3 [76]

(Specify size/type) OUTLET

____ NH No-Hub
____ NH No-Hub
____ NL Neo-Loc
____ NL Neo-Loc

'E' BODY HT. DIM.

4-7/8 [124]
4-3/4 [121]
5-1/4 [133]
4-3/8 [111]

PREFIXES

____ ZB D.C.C.I. Body Assembly w/ Polished Bronze Top
____ ZN D.C.C.I. Body Assembly w/ Polished Nickel Bronze Top*
____ ZS D.C.C.I. Body Assembly w/ Polished Stainless Steel Top

SUFFIXES

____ -AR Acid Resisting Epoxy Coated Cast Iron
____ -BP Bronze Plug
____ -CC Stainless Steel Clamp Collar
____ -G Galvanized Cast Iron
____ -TC Neo-Loc Test Cap Gasket (2-3 [51-76] NL Outlet Only)
____ -VP Vandal-Proof Secured Top

* Regularly furnished unless otherwise specified.