Z107-AC

20 [508] WIDE DECK FLANGE ROOF DRAIN
WITH ANGULAR UNDERDECK CLAMP

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

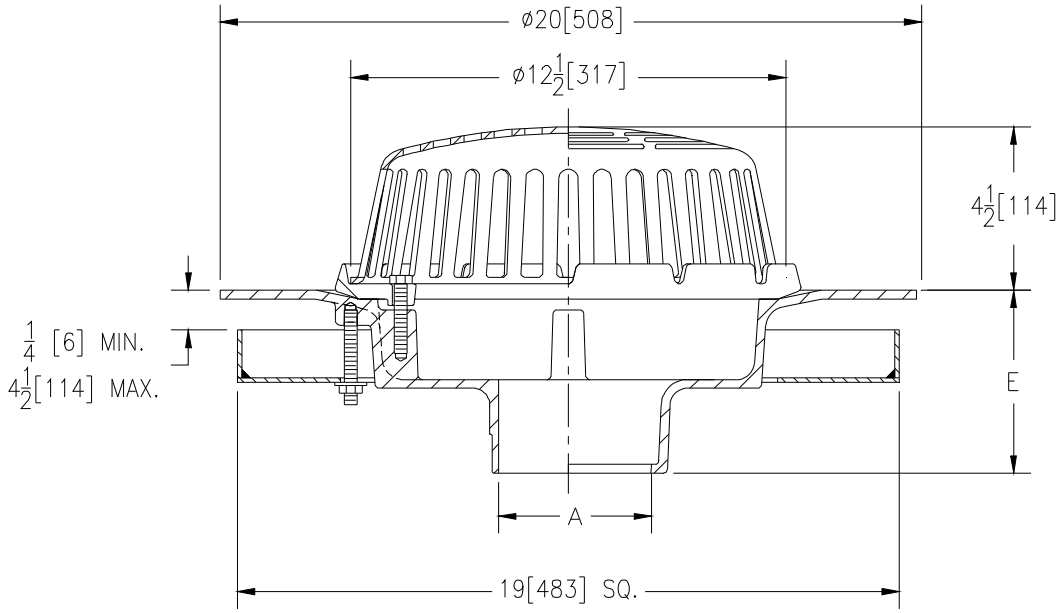

A Pipe Size In [mm]	Approx. Wt. Lbs. [kg]	Dome Open Area Sq. In. [cm²]
3,4[76,102]	39 [18]	103 [665]
6,8[152,203]		

ENGINEERING SPECIFICATION: ZURN Z107-AC
20" [508] Diameter wide deck flange roof drain. Dura-Coated cast iron with combination membrane flashing clamp/gravel guard, low silhouette Poly-Dome and angular underdeck clamp.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

3,4,6 [76,102,152]
3,4 [76,102]
3,4,6,8 [76,102,152,203]

(Specify size/type) **OUTLET**

_____ IC Inside Caulk
_____ IP Threaded
_____ NH No-Hub

E BODY HT. DIM.

5-1/4 [133]
5-1/4 [133]
5-1/4 [133]

PREFIXES

___ Z D.C.C.I. Body with Poly-Dome*
___ ZA D.C.C.I. Body with Aluminum Dome
___ ZC D.C.C.I. Body with Cast Iron Dome

SUFFIXES

___ -AR Acid Resistant Epoxy Coated Finish
___ -AW 3/4 [19] to 4 [102] Adjustable Water Level Regulator
___ -E Static Extension 1 [25] thru 4 [102] (Specify Ht.)
___ -EA Adjustable Extension Assembly 2-1/8 [54] thru 3-1/2 [89]
___ -FG Flush Grate
___ -G Galvanized Cast Iron
___ -SS Stainless Steel Mesh Screen Over Dome
___ -VP Vandal Proof Secured Top
___ -W2 2 [51] Internal Water Dam
___ -W3 3 [76] Internal Water Dam
___ -W4 4 [102] Internal Water Dam
___ -84 Stainless Steel Perforated Gravel Guard
___ -85 Stainless Steel Perforated Extension
___ -89 2 [51] High External Water Dam

* Regularly furnished unless otherwise specified.

Zurn Industries, LLC | **Specification Drainage Operation**
1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929
In Canada | **Zurn Industries Limited**
3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292
www.zurn.com

Rev. A
Date: 10/02/2017
C.N. No. 138191
Prod. | Dwg. No. Z107-AC