




ZS1902-HD

12-1/2 x 12-1/2 [318 x 318] A.R.E. SANI-FLOR RECEPTOR
 10 [254] SUMP DEPTH W/ STAINLESS STEEL FRAME &
 X-HEAVY DUTY STAINLESS STEEL GRATE

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

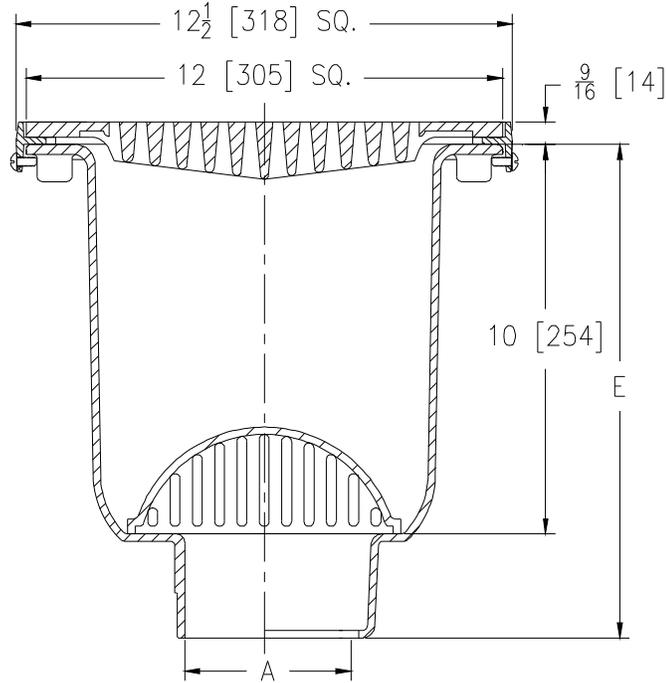

A Pipe Size In.	Approx Wt. Lbs. [kg]	Grate Open Area Sq. In. [cm ²]
2-3-4 [51-76-102]	36 [16]	31 [200]

ENGINEERING SPECIFICATION: ZURN ZS1902-HD

Sani-Flor Receptor 12-1/2 x 12-1/2 x 10 [318 x 318 x 254] deep cast iron body with white acid resisting porcelain enamel interior with stainless steel frame and X-heavy duty stainless steel grate, complete with ABS anti-splash interior bottom dome strainer.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

- 2-3-4 [51-76-102]
- 2-3-4 [51-76-102]
- 2-3-4 [51-76-102]

(Specify size/type) **OUTLET**

- _____ IC Inside Caulk
- _____ NH No-Hub
- _____ NL Neo-Loc

'E' BODY HT. DIMENSION

- 13-1/8 [333]
- 13-1/8 [333]
- 12-1/2 [317]

PREFIXES

___ ZS Cast Iron Body w/ White A.R.E. Interior, 12-1/2 [318] Square Stainless Steel Frame and Full Grate w/ 1/4 [6] Square Openings*

SUFFIXES

- ___ -K Seepage Flange
- ___ -KC Seepage Flange with Seepage Holes and Clamp Collar
- ___ -LD (Less) Internal Bottom Dome Strainer
- ___ -P 1/2 [13] Trap Primer Connection (See Z1023)
- ___ -SA Stabilizer Assembly (See Z1023)
- ___ -TC Neo-Loc TEst Cap Gasket (2 [51] - 4 [102] NL Bottom Outlet Only)
- ___ -VPS Vandal-Proof Strainer
- ___ -2 1/2 Grate
- ___ -3 3/4 Grate
- ___ -4 Full Grate w/ Center Opening 3-1/32 [77] Square
- ___ -11 Vandal-Proof Secured Grate
- ___ -23 Aluminum Bucket
- ___ -25 White A.R.C. Bucket
- ___ -31 Stainless Steel Mesh Liner for Bucket
- ___ -32 Aluminum Dome Strainer
- ___ -33 White A.R.C. Anti-Splash Bottom Dome Strainer
- ___ -34 N.B. Anti-Splash Bottom Dome Strainer

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. A	DATE: 7/29/11	C.N. NO. 98477
DWG. NO. 59934	PRODUCT NO. ZS1902-HD	