




Z1902-25

12 X 12 [305 X 305] A.R.E. SANI-FLOR RECEPTOR
W/ 10 [254] SUMP DEPTH & WHITE A.R.C. BUCKET

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

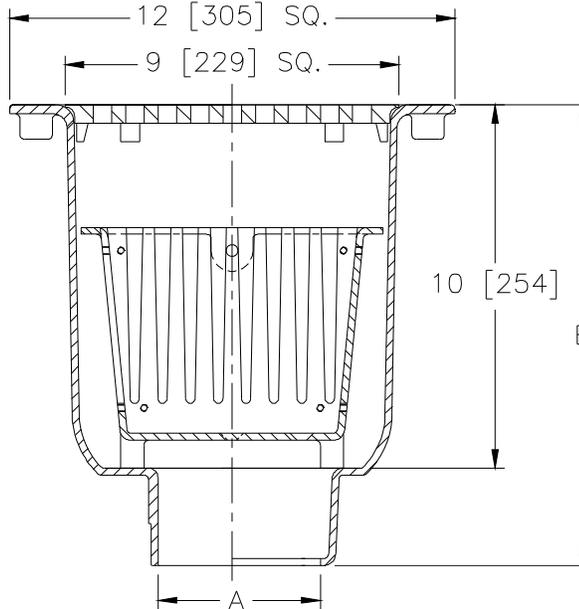

A - Pipe Size In. [mm]	Approx Wt. Lbs. [kg]	Grate Open Area Sq. In. [cm ²]
2,3,4 [51,76,102]	36 [13]	31 [200]

ENGINEERING SPECIFICATION: ZURN Z1902-25

Sani-Flor receptor 12" x 12" x 10" [305mm x 305mm x 254mm] deep cast iron body and square slotted light duty grate, with white acid resisting porcelain enamel interior and top, and black ground enamel exterior coating, complete with white A.R.C. bucket.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

- 3, 4 [76, 102]
- 2, 3, 4 [51, 76, 102]
- 2, 3, 4 [51, 76, 102]

(Specify size/type) OUTLET

- ___ IC Inside Caulk
- ___ NH No-Hub
- ___ NL Neo-Loc

'E' BODY HT. DIMENSION

Z

- 12-5/8 [321]
- 12-5/8 [321]
- 12 [305]

ZN / ZS

- 13-1/8 [333]
- 13-1/8 [333]
- 12-1/2 [318]

PREFIXES

- ___ Z Cast Iron Body w/ White A.R.E. Interior*
- ___ ZN Cast Iron Body w/ White A.R.E. Interior, 12-1/2 [318] Square Nickel Bronze Frame and Full Grate with 1/2 [13] Openings
- ___ ZS Cast Iron Body w/ White A.R.E. Interior, 12-1/2 [318] Square Stainless Steel Frame and Full Grate with 1/2 [13] Openings

SUFFIXES

- | | |
|---|--|
| ___ -DX Dex-O-Tex Flange (ZN Only) | ___ -2 1/2 Grate |
| ___ -HD Stainless Steel Frame w/ Extra-Heavy Duty Stainless Steel Grate (ZS Only) | ___ -3 3/4 Grate |
| ___ -HP Heel-Proof Grate (ZN Only) | ___ -4 Full Grate w/ Center Opening (2 [51] Dia. for Z) and (3-1/32 [77] Square for ZN & ZS) |
| ___ -K Anchor Flange | ___ -6 Grate w/ 6 [152] Dia. x 6 [152] High Funnel |
| ___ -KC Anchor Flange w/ Seepage Holes and Clamp Collar | ___ -8 Grate w/ 8-7/8 x 3-5/8 x 3-3/4 [225 x 92 x 95] High Oval Funnel |
| ___ -P 1/2 [13] Trap Primer Connection (See Z1023) | ___ -11 Vandal-Proof Secured Grate (ZN & ZS Only) |
| ___ -SA Stabilizer Assembly (See Z1903) | ___ -15 Solid Loose Set Cover (Z & ZN Only) |
| ___ -TC Neo-Loc Test Cap Gasket (2, 3, 4 [51, 76, 102] NL Bottom Outlet Only) | ___ -19 Full Hinged Grate (ZN Only) |
| ___ -VPS Vandal-Proof Strainer | ___ -31 Stainless Steel Mesh Liner for Bucket |
| ___ -1 Less Grate | |

* Regularly furnished unless otherwise specified.

Zurn Industries, LLC | Specification Drainage Operation
1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929
In Canada | Zurn Industries Limited
3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292
www.zurn.com

Rev. B
Date: 10/12/2017
C.N. No. 138744
Prod. | Dwg. No. Z1902-25