




# Z1902-23-31

12 X 12 [305 X 305] A.R.E. SANI-FLOR RECEPTOR  
 10 [254] SUMP DEPTH W/ ALUMINUM BUCKET AND  
 STAINLESS STEEL MESH LINER FOR BUCKET

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

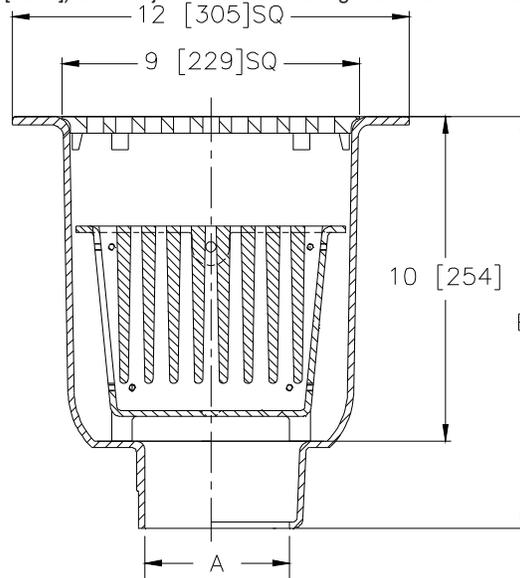

A- Pipe Size In. [mm]	Approx Wt. Lbs. [kg]	Grate Open Area Sq. In. [cm <sup>2</sup> ]
2, 3, 4 [51, 76, 102]	36 [16]	31 [200]

**ENGINEERING SPECIFICATION: ZURN Z1902-23-31**

Sani-Flor Receptor 12" x 12" x 10" [305mm x 305mm x 259mm] Deep cast iron body and square slotted medium duty grate, with white acid resisting porcelain enamel interior and top, and black ground enamel exterior coating, complete with aluminum bucket and stainless steel mesh liner for bucket.

**OPTIONS** (Check/specify appropriate options)

**PIPE SIZE**

3, 4 [76, 102]  
 2, 3, 4 [51, 76, 102]  
 2, 3, 4 [51, 76, 102]

(Specify size/type) **OUTLET**

\_\_\_ IC Inside Caulk  
 \_\_\_ NH No-Hub  
 \_\_\_ NL Neo-Loc

**'E' BODY HT. DIMENSION**

Z	ZN/ ZS
12 5/8 [321]	13 1/8 [333]
12 5/8 [321]	13 1/8 [333]
12 [305]	12 1/2 [318]

**PREFIXES**

- \_\_\_ Z Cast Iron Body w/ White A.R.E. Interior\*
- \_\_\_ ZN Cast Iron Body w/ White A.R.E. Interior, 12 1/2 [318] Square Nickel Bronze Frame and Full Grate with 1/2 [13] Square Openings (Add 1/2 [13] to 12 [305] and 'E' Dim)
- \_\_\_ ZS Cast Iron Body w/ White A.R.E. Interior, 12-1/2 [318] Square Stainless Steel Frame and 3/4 Grate with 12 [13] Openings (Added 1/2 [13] to 12 [305] Dim.)

**SUFFIXES**

- |   |  |
|---|--|
| ___ -DX Dex-o-Tex Flange (ZN Only)  | ___ -VPS Vandal-Proof Strainer   |
| ___ -HD Stainless Steel Frame w/ Extra-Heavy Duty Stainless Steel Grate       | ___ -1 (Less) Grate  |
| ___ -HP Heelproof Grate (1/4 [6] Sq. Openings) (ZN Only)                      | ___ -2 1/2 Grate   |
| ___ -K Anchor Flange With Seepage Holes                                       | ___ -3 3/4 Grate   |
| ___ -KC Anchor Flange With Seepage Holes with Clamp Collar                    | ___ -4 Full Grate with Center Opening (2 [51] Dia. for Z) and (3-1/32 [77] Square for ZN & ZS) |
| ___ -P 1/2 [13] Trap Primer Connection (See Z1023)                            | ___ -6 Grate w/ 6 [152] dia. x 6 [152] High Funnel   |
| ___ -SA Stabilizer Assembly (See Z1903)                                       | ___ -8 Grate w/ 8-7/8 x 3-5/8 x 3-3/4 [225 x 92 x 95] High Oval Funnel                         |
| ___ -TC Neo-Loc Test Cap Gasket (2, 3, 4 [51, 76, 102] NL Bottom Outlet Only) | ___ -11 Vandal Proof Secured Grate (ZN & ZS Only)  |
|   | ___ -15 Solid Loose Set Cover (Z & ZN Only)  |
|   | ___ -19 Full Hinged Grate (ZN Only)  |

\* Regularly furnished unless otherwise specified.