




Z1204-1ND4-B

ADJUSTABLE VERTICAL BLOWOUT-NO-HUB
WITH SIDE INLET

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

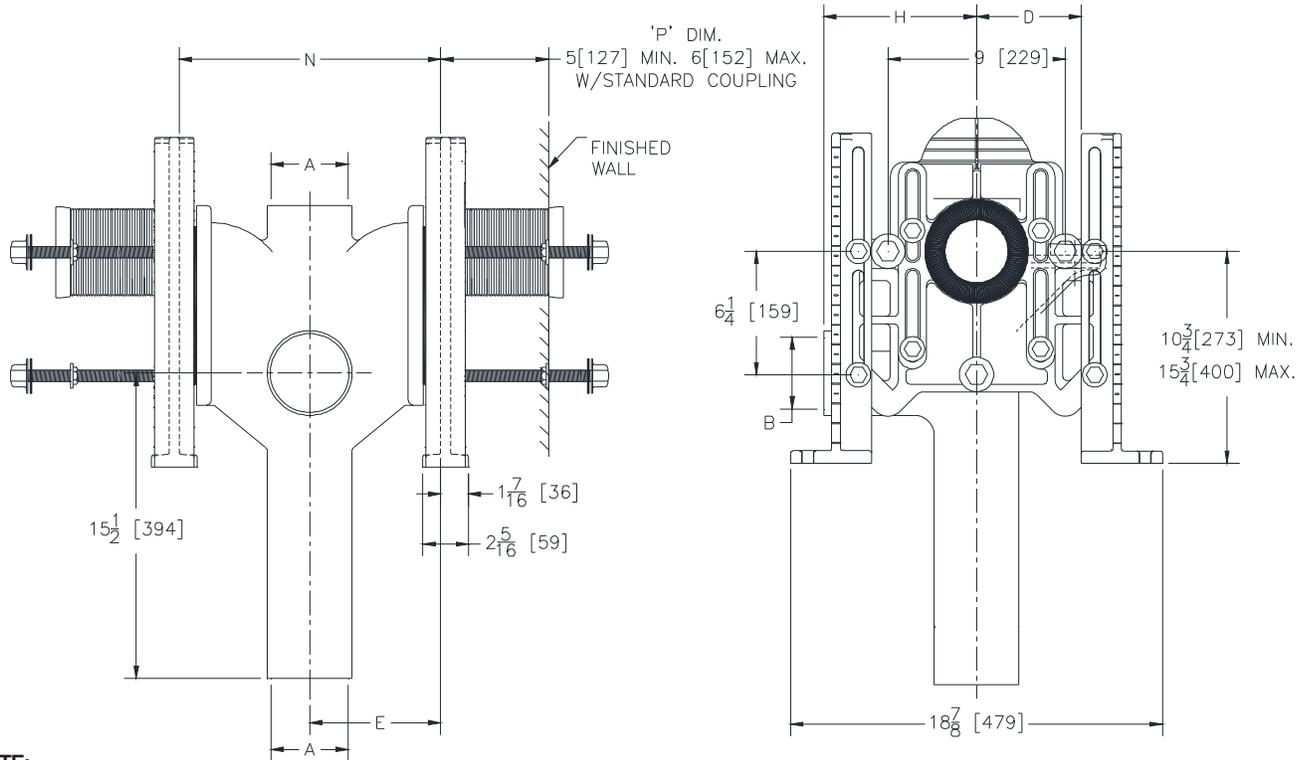

NOTE:

1. Min. 'P' Dim. Obtainable = 2 [51] with cut standard coupling.
2. Feet bolted to floor using min. 1/2 [13] dia. bolts and back slots on carrier feet.

| Product No. | Dimensions in Inches [mm] | | | | | | Approx. Wt. Lbs [kg] |
|--------------|---------------------------|---------|---------|-------------|-------------|--------------|-------------------------|
| | A | B | D | E | H | N | |
| Z1204-1ND4-B | 4 [102] | 4 [102] | 5 [127] | 6-5/8 [168] | 5-1/2 [140] | 13-1/4 [336] | 139 [63] |

ENGINEERING SPECIFICATION: ZURN Z1204-1ND4-B

Adjustable, vertical blowout water closet "Rigid System" with 4" [102mm] No-Hub connections and (1) 4" [102mm] side inlet. Complete with Dura-Coated cast iron double main fitting, with 2" [51mm] vent, adjustable gasketed face plate, universal floor mounted foot supports, corrosion resistant adjustable ABS coupling with integral test cap, fixture bolts, trim, stud protectors, and bonded "Neo-Seal" gasket.

PRODUCT/DEFINITION

_____ Z1204-1ND4-B No-Hub Stack, Double Inlet, (1) 4 [102] Side Inlet, 2 [51] Vent

PREFIXES

- _____ Z D.C.C.I. System with Zurn "ZZ" Adjustable Coupling
- _____ ZQ D.C.C.I. System with NPT Face Plate, Non-Adjustable Coupling

SUFFIXES

- _____ -A Auxiliary Support Assembly (for 'P' Dim. Greater Than 18 [457])
- _____ -CC Corrosion Resistant 6 [152] Long Cast Iron Coupling
- _____ -CL Coupling Length Other than Standard 6 [152] (Specify Length Required)
- _____ -JR 2 [51] Right Hand Auxiliary Inlet
- _____ -M Auxiliary Foot Support (for 'P' Dim. 10 - 18 [254 - 457])
- _____ -PF Pre-Fab Foot
- _____ -PS Pre-Fab Slotted Foot
- _____ -RYK Unistrut Pre-Fab Foot
- _____ -VL Left Hand Vent Connection
- _____ -VP Vandal Proof Trim
- _____ -X3 3 [76] Carrier Foot Extension (See Z1200-FT-EXT-3)
- _____ -X4 4 [102] Carrier Foot Extension (See Z1200-FT-EXT-4)
- _____ -45 Finishing Frame for Blowout Closet (See Z1200-FINFRAME-B)
- _____ -50 Flush Valve Supply Support for W.C. (See Z1200-SPLY-SPRT-WC)

* Regularly furnished unless otherwise specified.

Zurn Industries, LLC | Specification Drainage Operation
1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929
In Canada | Zurn Industries Limited
3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292
www.zurn.com

Rev. A
Date: 10/12/2017
C.N. No. 138653
Prod. | Dwg. No. Z1204-1ND4-B