




Z100F-DP

FLOFORCE® HIGH PERFORMANCE ROOF DRAIN
WITH TOP-SET® DECK PLATE
DESIGNED TO DRIVE EFFICIENT FLOW PERFORMANCE

SPECIFICATION SHEET

TAG _____

Design and Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

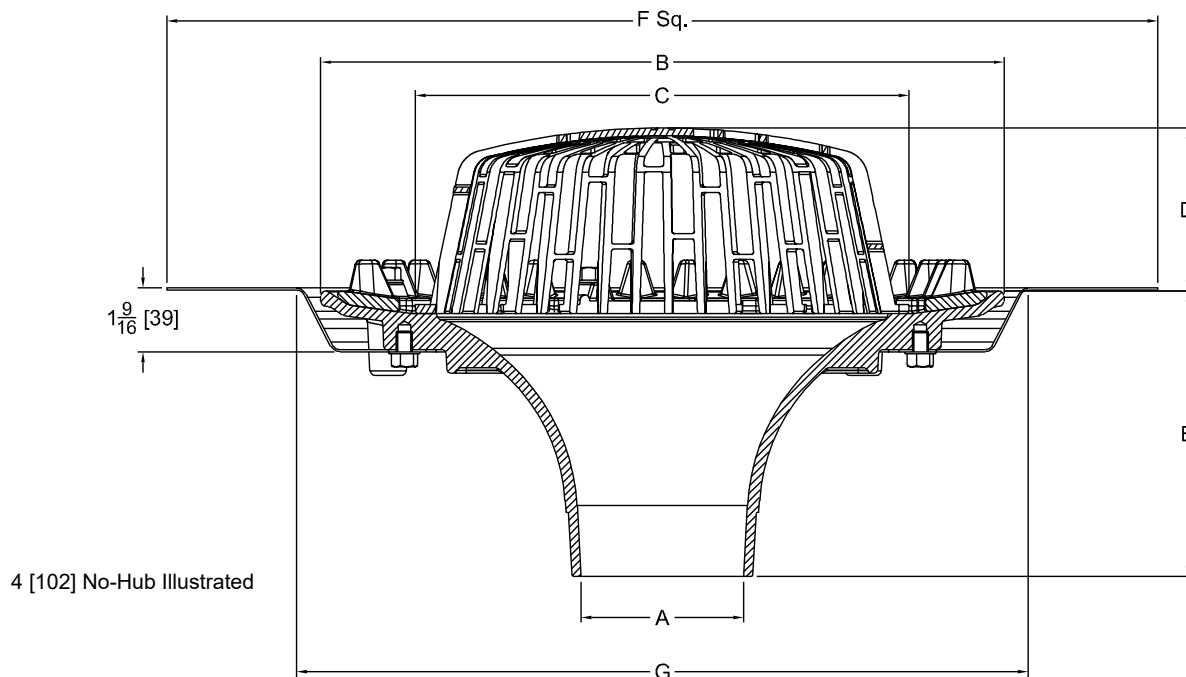

A Outlet Size In. [mm]	B Body Diameter In [mm]	C Dome Diameter In [mm]	D Height, Roof to Dome Top In [mm]	F In [mm]	G In [mm]	Weight lbs [kg]	Dome Open Area Sq. In. [cm2]
2,3,4 [51,76,102]	16-9/16 [421]	12-5/16 [313]	4 [102]	24 [610]	17 [432]	39 [18]	121 [780]
6,8 [152, 203]	20-3/32 [510]	15-7/8 [403]	6 [152]	30 [762]	21 [533]	46 [21]	214 [1380]

ENGINEERING SPECIFICATION: ZURN Z100F-DP

FLOFORCE® High efficient flow performing roof drain engineered to evacuate water off of roof structure by incorporating a smooth funnel-shaped interior surface, providing a seamless transition to outlet connection and eliminating internal obstructions. Complete with Dura-Coated cast iron body with combination membrane flashing clamp/gravel guard, Top-Set® deck plate and low silhouette Poly-Dome. Flashing clamp/gravel guard provided to prevent debris from entering the drain while allowing water to immediately pass through at zero head level. Poly-dome designed to maximize effective open area and promote efficient flow. (Refer to Z100F specification sheet for flow curves.)

OPTIONS (Check/specify appropriate options)

PIPE SIZE

2, 3, 4 [51, 76, 102]
6, 8 [152, 203]
2, 3, 4 [51, 76, 102]
6 [152]
2, 3, 4 [51, 76, 102]
6, 8 [152, 203]
3, 4 [76, 102]
6 [152]

(Specify size/type) OUTLET

____ NH No-Hub
____ NH No-Hub
____ NL Neo-Loc
____ NL Neo-Loc
____ IP Threaded
____ IP Threaded
____ IC Inside Caulk
____ IC Inside Caulk

E BODY HT. DIM.

6-15/16 [176]
7-7/16 [189]
7-3/8 [187]
8-1/32 [204]
5-15/16, 6-3/16, 6-5/16 [151, 157, 160]
6-11/16, 6-3/4 [170, 171]
5-13/16 [148]
6-1/16 [154]

PREFIXES

____ Z D.C.C.I. Body with Poly-Dome* ____ ZA D.C.C.I. Body with Aluminum Dome ____ ZC D.C.C.I. Body with Cast Iron Dome

SUFFIXES

____ -AR Acid Resistant Epoxy Coated
____ -E Static Extension 1 [25] thru 4 [102] (Specify Ht.)
____ -EA Adjustable Extension Assembly
2-1/8 [54] thru 3-1/2 [89]
____ -G Galvanized Cast Iron
____ -SC Secondary Clamp Collar
____ -TC Neo-Loc Test Cap Gasket
(2, 3, 4 [51, 76, 102] NL Bottom Outlet Only)
____ -VP Vandal-Proof Secured Top
____ -84 Stainless Steel Perforated Gravel Guard
____ -85 Stainless Steel Perforated Extension
____ -89 2 [51] High Overflow Dam

* Regularly furnished unless otherwise specified

⚠ **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov

⚠ **ADVERTENCIA:** Cáncer y daño reproductivo - www.P65Warnings.ca.gov

⚠ **AVERTISSEMENT:** Cancer et effets néfastes sur la reproduction - www.P65Warnings.ca.gov

Zurn Industries, LLC | Specification Drainage Operation
1801 Pittsburgh Avenue, Erie, PA 16502, Ph. 855.663.9876

In Canada | Zurn Industries Limited
7900 Goreway Drive, Unit 10, Brampton, Ontario L6T 5W6, Ph. 877.892.5216

www.zurn.com

Rev. D
Date: 08/08/2023
C.N. No. 145453
Patent: zurn.com/patents
Prod. | Dwg. No. Z100F-DP FLOFORCE®