

**Z1201-HD4-XH**


EXTRA-HEAVY-DUTY - 750 lbs [340kg] BACK-TO-BACK

EZCARRY® ADJUSTABLE HORIZONTAL HIGH PERFORMANCE SIPHON TAG

JET HUB AND SPIGOT WATER CLOSET CARRIER SYSTEM

SPECIFICATION SHEET

Design and Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

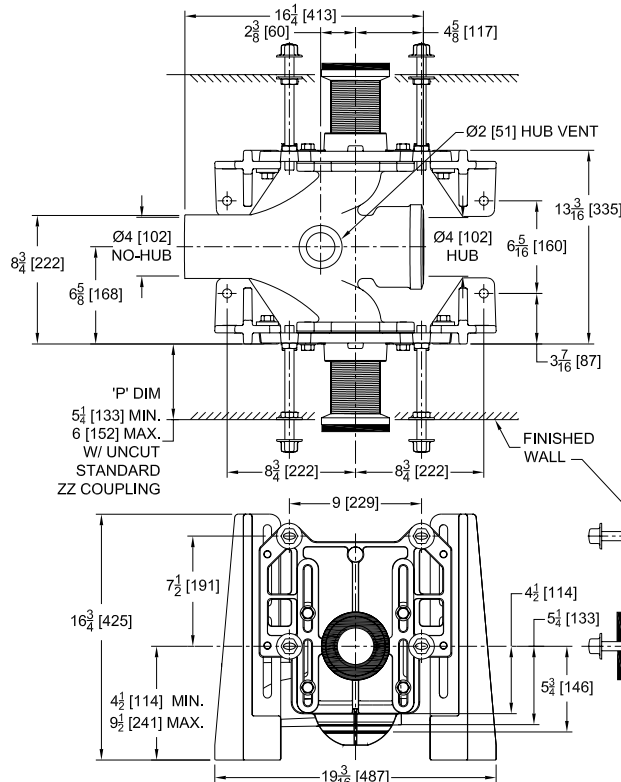

Product Number	Approx. Wt. Lbs. [kg]
Z1201-HD4-XH	147 [67]

Notes:

1. Z coupling, Min. 'P' Dim Obtainable=2 [51]. EZ-Set™ Coupling, Min. 'P' Dim. Obtainable=4-1/4 [108] or 2-1/16 [52] for 12 [305] NPT.
2. Feet bolted to floor using min. 1/2 [13] dia. anchors.

Z1201-HD4-XH Illustrated**ENGINEERING SPECIFICATION: ZURN Z1201-HD4-XH**

EZCarry® Extra-Heavy-Duty horizontal siphon jet water closet carrier system, with high performance Dura-Coated cast iron main fitting with hydro-mechanically optimized sweep, 4" [102 mm] Hub and Spigot connections, and extended 2" [51 mm] vent. Corrosion resistant, adjustable 3" [76 mm] dia. X 6" [152 mm] couplings with integral test caps, designed to increase flow velocity and line carry, and labor saving "Neo-Seal" bonded gaskets optimize flow performance while reducing installation steps. Complete system includes adjustable faceplates, QuickFit™ faceplate gaskets, floor mounted foot supports; extra-heavy-duty 1/2" [13 mm] rear anchor tie downs; fixture bolts, trim, and stud protectors. EZCarry® XH system complies with all applicable requirements of ASME A112.6.1M up to a 750 lbs [340 kg] maximum static load.

OPTIONS (Check/specify appropriate options)

___ Z1201-HD4-XH 4 [102] Hub and Spigot Back-to-Back Inlet (Double)

PREFIXES

___ Z D.C.C.I. System with Zurn ZZ Adjustable Coupling*
___ ZQ D.C.C.I. System with NPT Faceplate, Non-Adjustable Coupling

SUFFIXES

___ -CC Corrosion Resistant Cast Iron Coupling (2-1/4 [57] to 12 [305])
___ -CE EZ-Set™ Coupling (NPSM 6 [152], 12 [305] or custom) (NPT 12 [305] or custom)
___ -CL Custom Length Standard Coupling with Integral Test Cap (Specify Length 4, 8, 10, 12 [102, 203, 254, 305])
___ -CS 2-1/4 [57] Polymer Coupling with Integral Test Cap (ZZ Coupling Only)

___ -G Galvanized Cast Iron
___ -VP Vandal-Proof Trim
___ -45 Finishing Frame for Siphon Jet System
___ -50 Flush Valve Supply Support for Water Closets

* Regularly furnished unless otherwise specified.

⚠ **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov⚠ **ADVERTENCIA:** Cáncer y daño reproductivo - www.P65Warnings.ca.gov⚠ **AVERTISSEMENT:** Cancer et effets néfastes sur la reproduction - www.P65Warnings.ca.gov

Zurn Industries, LLC | Specification Drainage Operation
1801 Pittsburgh Avenue, Erie, PA 16502, Ph. 855.663.9876

In Canada | Zurn Industries Limited
7900 Goreway Drive, Unit 10, Brampton, Ontario L6T 5W6, Ph. 877.892.5216

www.zurn.com

Rev. A
Date: 07/23/24
C.N. No. 146096
Patent zurn.com/patents
Prod. | Dwg. No. Z1201-HD4-XH

Page 1 of 1