

It's Time For A

PVB INTERVENTION

ZURN[®]
WILKINS

MODEL

720A
Pressure Vacuum Breaker



ADVANTAGES:

- Tapped ball valves allow installation in any position (Universal Replacement)
- Bronze bonnet provides greater strength and protection against light freezes
- Serial number visible in any installed orientation

FEATURES:


- Pressure Vacuum Breaker consisting of an approved check valve, vacuum relief, inlet and outlet full port resilient seated shut-off valves and two test cocks
- Sizes: 1/2", 3/4", 1", 1 1/4", 1 1/2", 2"
- All bronze body with corrosion-resistant internal parts
- Simple and inexpensive repair kits
- Maximum pressure 150 psi
- Temperature range 33°F to 110°F



ISO 9000

Purchase Wilkins Model 720A for your next installation or retrofit

Customer Service Representatives available Monday through Friday 5:30 a.m. to 5:00 p.m., PT.
Call 855-ONE-ZURN (855-663-9876), email info@zurnwilkins.com or visit us online at www.zurn.com.

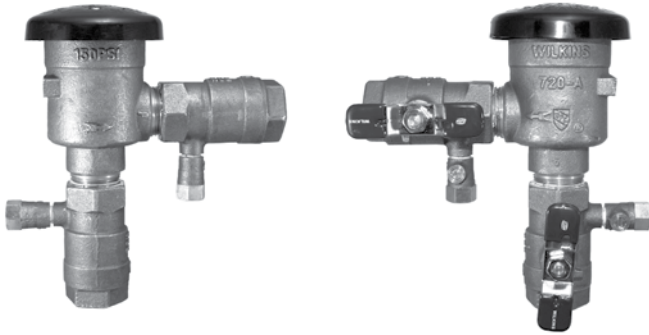

FEATURES

Sizes: 1/2" 3/4" 1" 1 1/4" 1 1/2" 2"

Maximum working water pressure	150 PSI
Maximum working water temperature	110°F
Hydrostatic test pressure	300 PSI
End connections threaded	ANSI B1.20.1

OPTIONS

(Suffixes can be combined)

- with full port QT ball valves (standard)
- L - less ball valves

ACCESSORIES

- Repair kit (complete)
- Water Hammer Arrester (Model 1250)
- QT-SET Quick Test Fitting Set

DIMENSIONS & WEIGHTS (do not include pkg.)

MODEL SIZE		DIMENSIONS (approximate)								WEIGHT			
		A		B		C		D		LESS BV		WITH BV	
in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lbs.	kg	lbs.	kg
1/2	15	6 7/8	175	3 13/16	97	4	102	3 1/2	89	4	1.8	6	2.7
3/4	20	7	178	4 1/8	105	4 1/8	105	3 1/2	89	4	1.8	6	2.7
1	25	7 5/8	194	4 1/2	114	4 5/8	118	3 1/2	89	4	1.8	8	3.6
1 1/4	32	10 13/16	275	7 1/4	184	7 1/4	184	4 1/2	114	14	6.4	20	9
1 1/2	40	10 3/8	264	6 7/8	175	6 7/8	175	4 1/2	114	14	6.4	20	9
2	50	11	279	7 1/2	191	7 5/8	194	4 1/2	114	14	6.4	26	10.4

APPLICATION

Designed for installation on potable water lines to protect against backsiphonage of contaminated water into the potable water supply. Assembly shall provide protection where a potential health hazard exists.

STANDARDS COMPLIANCE

- ASSE® Listed 1020
- IAPMO® Listed
- CSA® Certified
- Approved by the Foundation for Cross-Connection Control and Hydraulic Research at the University of Southern California

MATERIALS

Main valve body	Cast Bronze ASTM B584
Fasteners	Stainless Steel, 300 Series
Elastomers	Silicone (FDA approved) Buna Nitrile (FDA approved)
Polymers	Polypropylene (FDA approved) Delrin® (FDA approved)
Springs	Stainless steel, 300 series

