




# TYPICAL INSTALLATION

## Z1088

### BACKWATER VALVE (GATE TYPE)

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

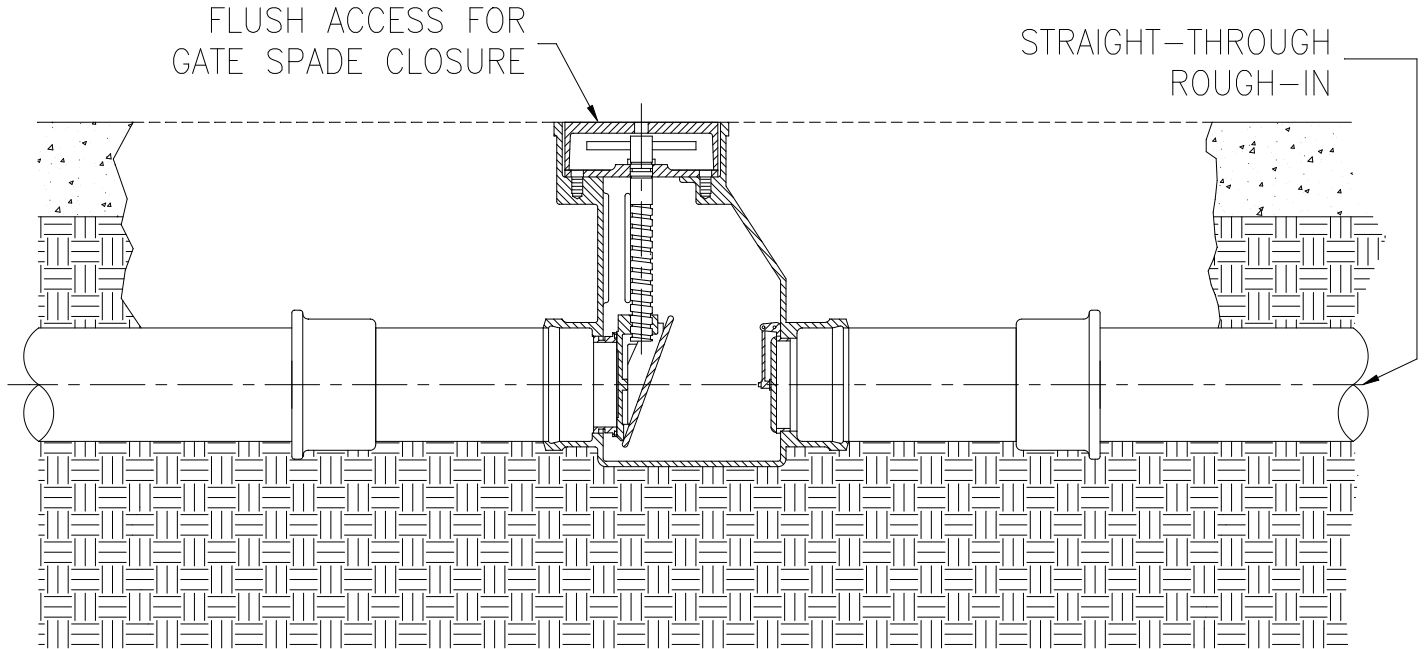

## Z1088

### GATE TYPE BACKWATER VALVE

Zurn spade type backwater valve offers both a restrictive flapper type and a manually operated gate valve which may be closed to provide positive protection during prolonged periods of flooding.

4 [102] valves utilize a PVC flapper valve that hangs closed. O-ring on seat provides a positive seal. 6 [152] valves utilize a conventional brass flapper seal arrangement that hangs 1/4 [6] open. The Z1088 offers straight through connections (no offset-see Z1090, Z1095), which is extremely important for installation in existing drainage lines, or where minimal pitch is required.

**⚠ WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

**⚠ ADVERTENCIA:** Cáncer y daño reproductivo - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

**⚠ AVERTISSEMENT:** Cancer et effets néfastes sur la reproduction - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

Zurn Industries, LLC | Specification Drainage Operation  
1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929  
In Canada | Zurn Industries Limited  
3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292  
[www.zurn.com](http://www.zurn.com)

Rev. A  
Date: 04/09/2018  
C.N. No. 139857  
Form No. T4