



4" CENTERSET GOOSENECK Z812B1-XL-TWM

TAG _____




Engineering Specifications: Zurn AquaSpec® Z812B1-XL-TWM

Polished chrome-plated cast brass wall mounted faucet body with integral shanks, quarter turn ceramic disc cartridges and a 5-3/8" [137mm] centerline rigid or swing gooseneck spout. Unit is furnished with a 2.2 GPM [8.3 L] pressure compensating aerator (complying with ANSI A112.18.1 Standard for flow), 2-1/2" [64mm] vandal-resistant color-coded metal lever handles and mounting hardware.

Zurn Lead Free products (-XL) is the line of durable, high quality brass faucets and fixtures that are designed and manufactured to comply with Section 1417 of the Safe Drinking Water Act (SDWA) which mandates the weighted average lead content of no more than 0.25% of the wetted surface.

*This product should be used with a WaterSense labeled counterpart with a compatible flush volume to ensure that the entire system meets the requirements for water efficiency and performance.

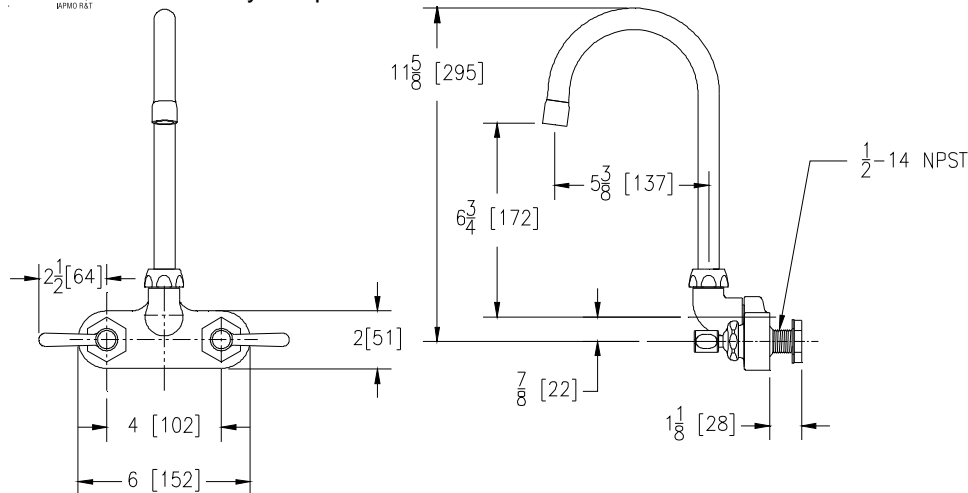

OPTIONAL ACCESSORIES

Note: All dimensions are for reference only. Do not use for pre-plumbing

Suffix	Description
<input type="checkbox"/> -FC	2.0 GPM [7.6 L] Laminar Flow Control in Base of Spout
<input type="checkbox"/> -FC__	Plain End Spout with Flow Control in Base of Spout (Specify GPM Flow 0.5, 1.0, 1.5)
<input type="checkbox"/> -G	1-1/4" [32mm] Grid Strainer Drain
<input type="checkbox"/> -GH	1-1/4" [32mm] Offset Handicap Grid Drain
<input type="checkbox"/> -HCT	Hot/Cold Text Indexes
<input type="checkbox"/> -140	Restricted 140° Swing Spout
<input type="checkbox"/> -2F	2.2 GPM [8.3 L] Vandal-Resistant Pressure Compensating Female Aerator
<input type="checkbox"/> -3F	0.5 GPM [1.9 L] Vandal-Resistant Pressure Compensating Female Aerator
<input type="checkbox"/> -4F	2.2 GPM [8.3 L] Vandal-Resistant Pressure Compensating Female Laminar Flow
<input type="checkbox"/> -5F	2.0 GPM [7.6L] Female Spray Outlet
<input type="checkbox"/> -7F*	1.0 GPM [3.8 L] Pressure Compensating Female Spray Outlet
<input type="checkbox"/> -11F	Single Screen Outlet
<input type="checkbox"/> -16F	1.0 GPM [3.8 L] Vandal Resistant Pressure Compensating Female Spray Outlet
<input type="checkbox"/> -17F*	1.5 GPM [5.7 L] Vandal Resistant Pressure Compensating Female Aerator
<input type="checkbox"/> -18F*	1.5 GPM [5.7 L] Vandal Resistant Pressure Compensating Female Laminar Flow
<input type="checkbox"/> -19F*	1.5 GPM [5.7 L] Anti-Microbial Pressure Compensating Female Laminar Flow Outlet
<input type="checkbox"/> -21F	1.0 GPM [3.8L] Pressure Compensating Female Laminar Flow Outlet
<input type="checkbox"/> -22F	1.0 GPM [3.8L] Pressure Compensating Vandal-Resistant Female Laminar Flow Outlet
<input type="checkbox"/> -23F	1.5 GPM [5.7L] Pressure Compensating Female Aerator

ZURN INDUSTRIES, LLC. ♦ COMMERCIAL BRASS OPERATION ♦ 5900 ELWIN BUCHANAN DRIVE ♦ SANFORD NC 27330

Phone: 1-800-997-3876 ♦ Fax: 919-775-3541 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 7900 Goreway Drive Unit 10 ♦ Brampton, Ontario L6T5W6 ♦ Phone: 905-405-8272 Fax: 905-405-1292