



Architectural/Engineering Specification:

Polished chrome-plated widespread with adjustable centers from 6" [152mm] to 20" [508mm], a 5" [127mm] centerline cast brass low profile spout and quarter turn ceramic disc cartridges. Unit is furnished with a 2.2 GPM [8.3 L] pressure compensating aerator (complying with ANSI A112.18.1 Standard for flow), 4" [102mm] vandal resistant color-coded metal wrist blade handles, mounting hardware and 1/2" NPSM coupling nuts for standard lavatory risers. Widespread accommodates installations up to 1-1/8" [29mm] thick.

Zurn Lead Free products (-XL) is the line of durable, high quality brass faucets and fixtures that are designed and manufactured to comply with Section 1417 of the Safe Drinking Water Act (SDWA) which mandates the weighted average lead content of no more than 0.25% of the wetted surface.

Product Features:

- Ceramic Disc Cartridge
- Chrome-plated Cast Brass Body
- Widespread Handles Adjustable From 6" to 20" Centers
- 4" Vandal Resistant Color Coded Metal Wrist Blade Handles

Compliance and Certification:

- Low-Lead Compliant
- ADA Compliant



*This device is WaterSense labeled when used with the appropriate flow rate and certified for residential and private restrooms.



Aerator Options:

	Flow rate GPM [LpM]	Vandal Resistant	Pressure Compensation	Water Sense Labeled	Outlet Type
-2M	2.2[8.3]	✓	✓		Aerator
-3M	0.5[1.9]	✓	✓		Spray
-4M	2.2[8.3]	✓	✓		Laminar
-7M	1.0[3.8]		✓	✓	Spray
-16M	1.0[3.8]	✓	✓		Spray
-17M	1.5[5.7]	✓	✓	✓	Aerator
-18M	1.5[5.7]	✓	✓	✓	Laminar
-22M	1.0[3.8]	✓			Laminar
-25M	0.35[1.3]	✓	✓		Spray


Suffix Options:

- G 1-1/4" [32mm] Grid Strainer Drain
- ICT Inter-connecting Copper Supply Tubes for 8" In-line Centers

Architectural/Engineering Approval

The information contained in this document is subject to change without notice. Please contact Zurn for most up to date information.

Rough-in/Overview dimensions

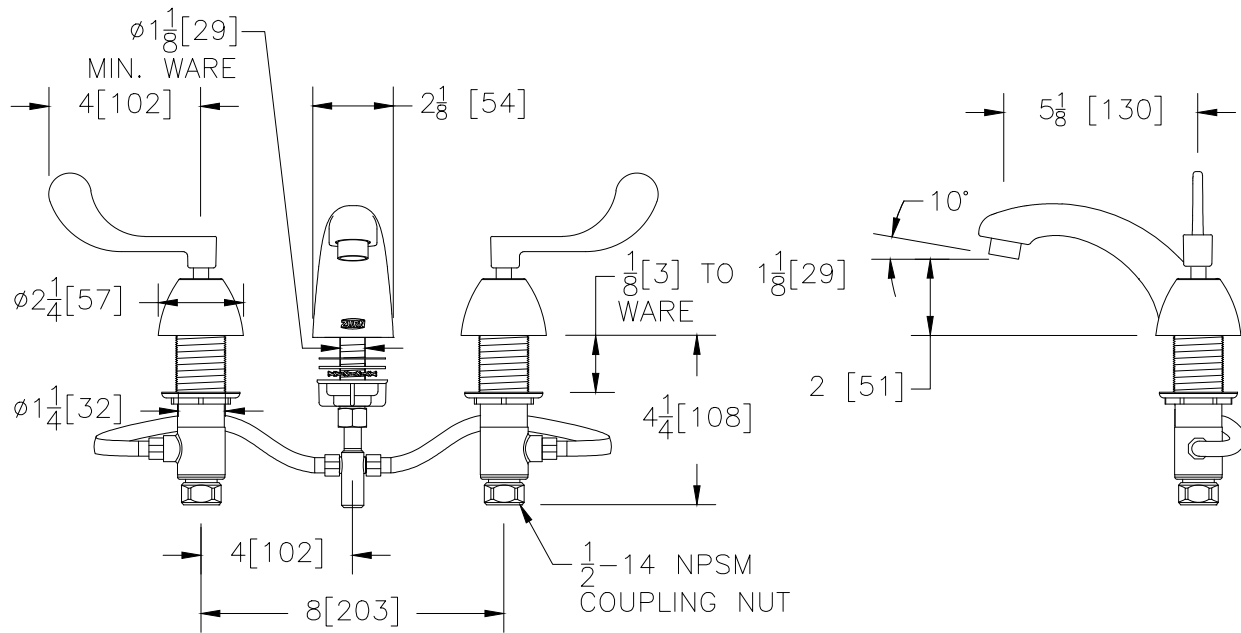

Note: All dimensions are for reference only. Do not use for pre-plumbing.